SOUNDINGS IN FEET

Formerly C&GS 1287, 1st Ed., Jan. 1923 C-1941-547 KAPP 131

11304

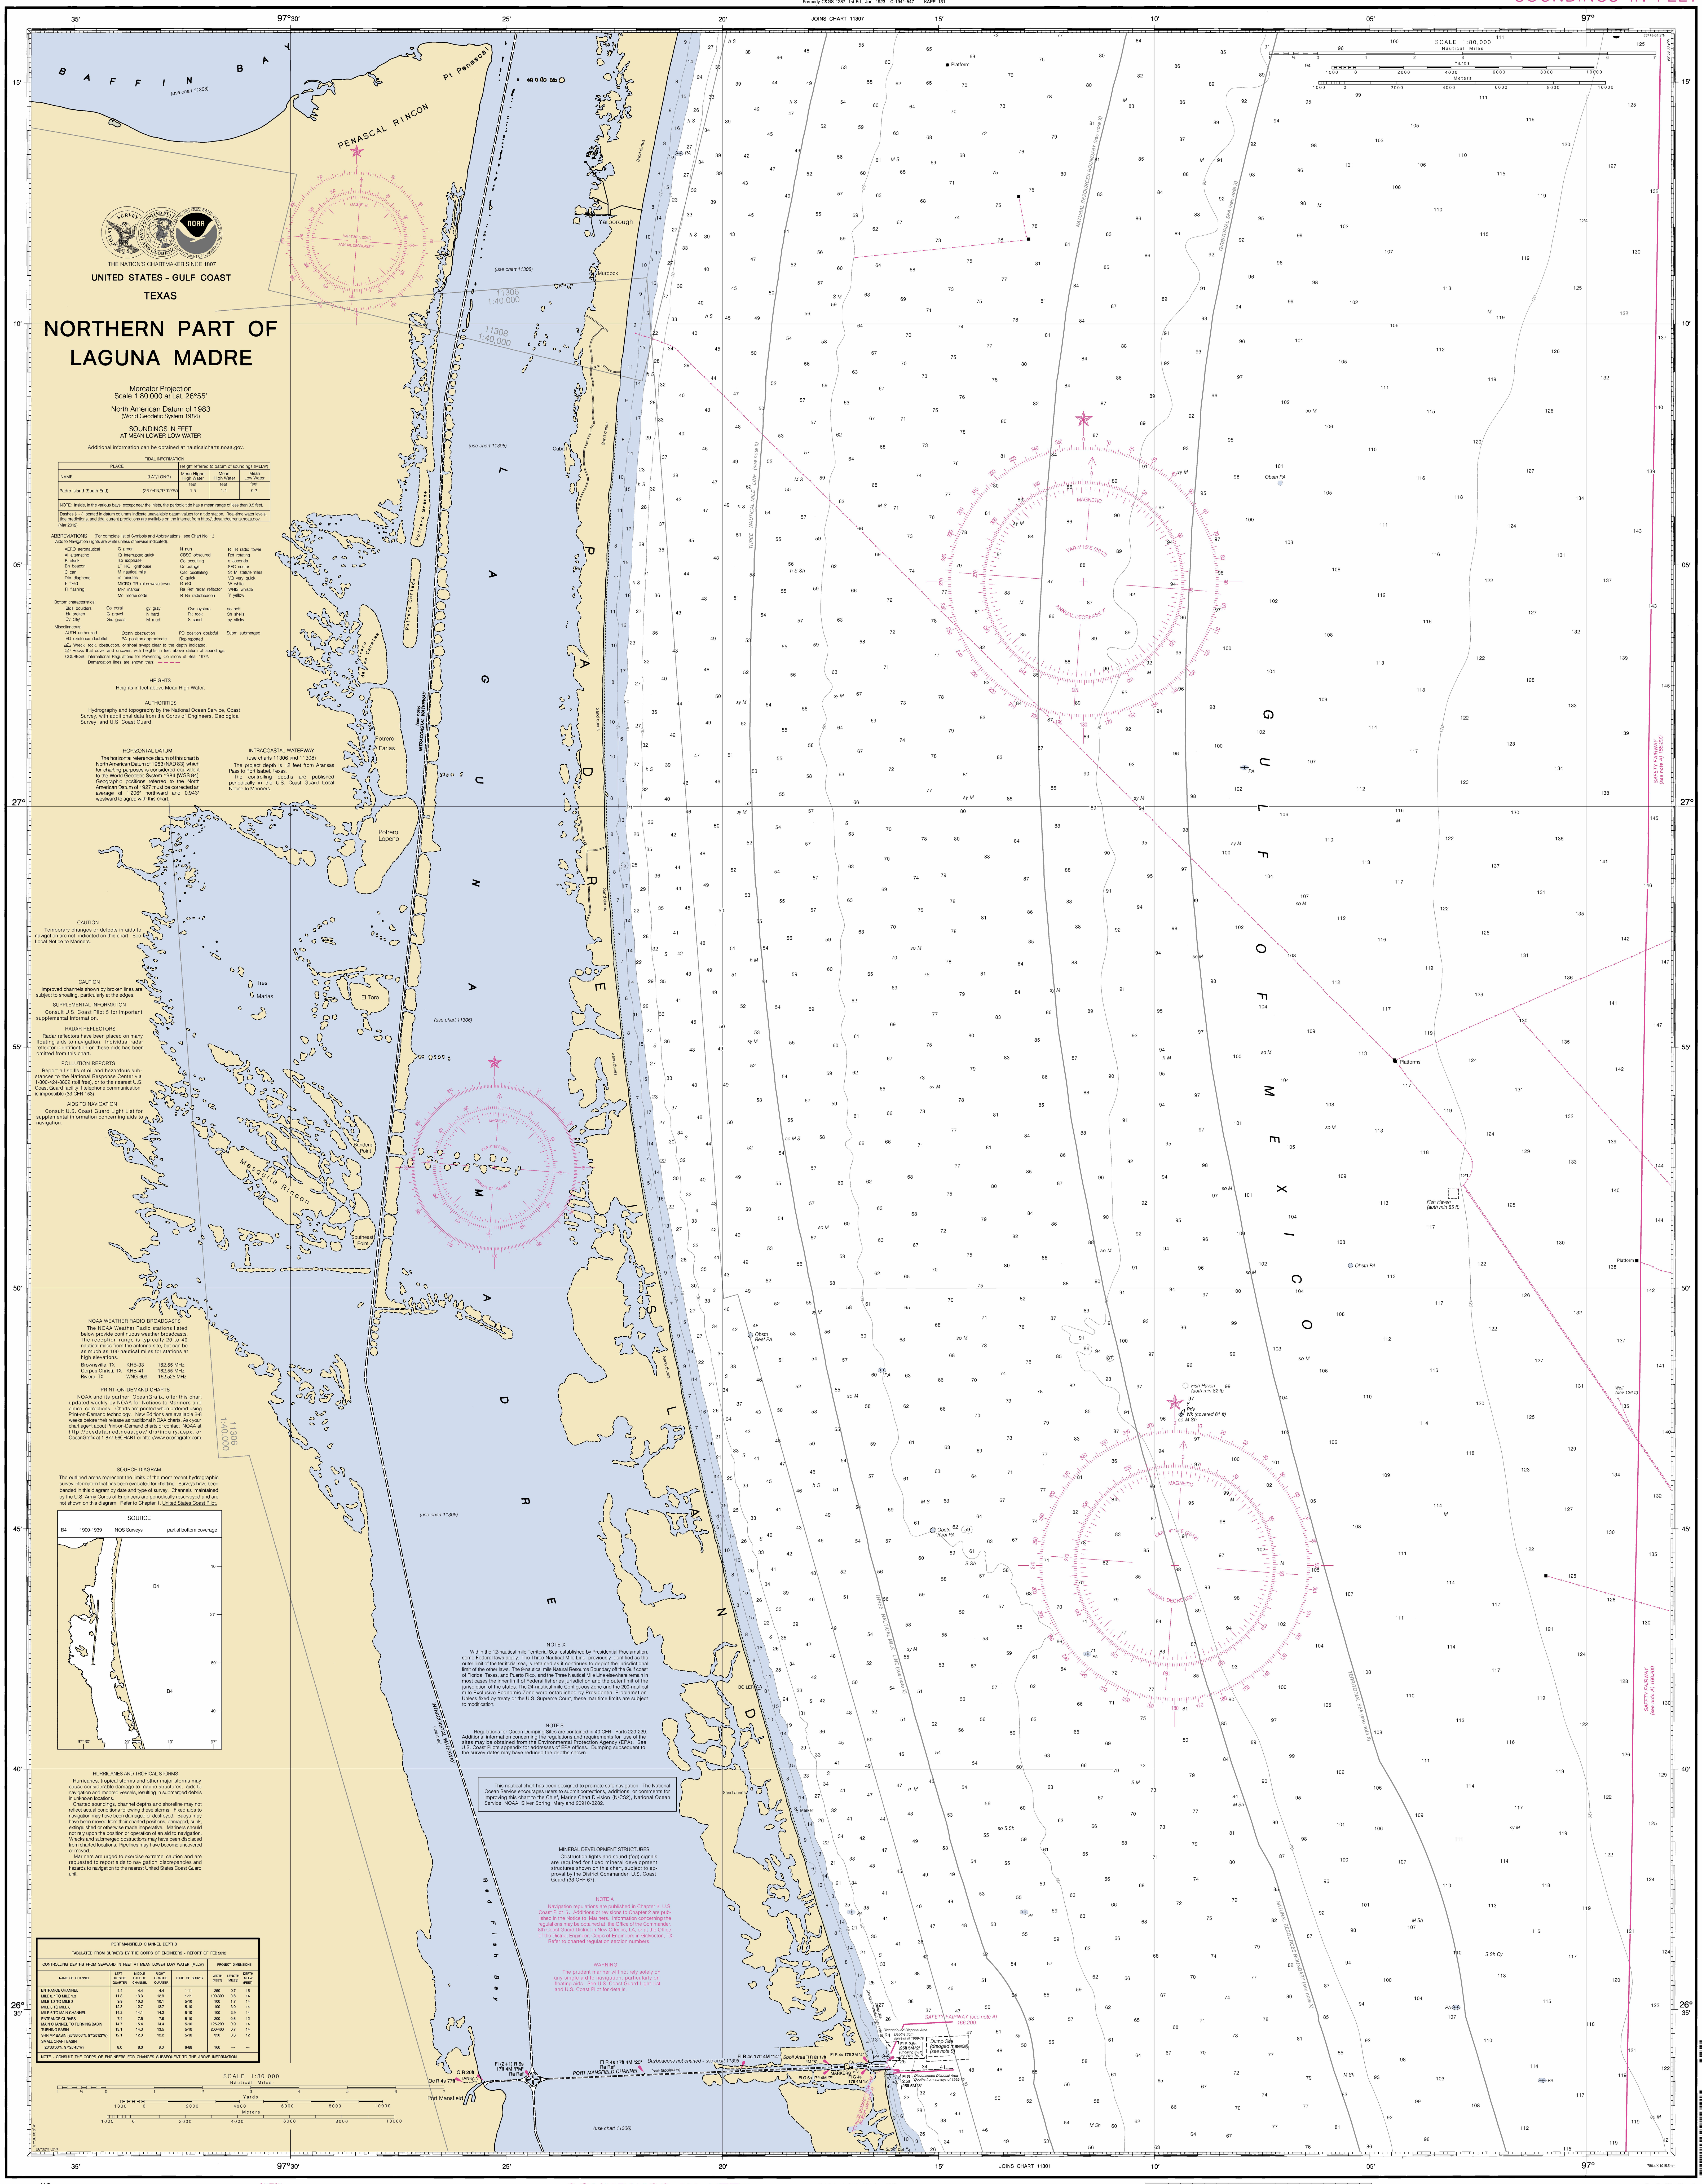

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES - GULF COAST

TEXAS

NORTHERN PART OF LAGUNA MADRE

Mercator Projection
Scale 1:80,000 at Lat. 26°55'

North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

Additional information can be obtained at nauticalcharts.noaa.gov.

TIDAL INFORMATION

PLACE		Height referred to datum of soundings (MLLW)		
NAME	(LAT/LONG)	Mean Higher High Water	Mean High Water	Mean Low Water
		feet	feet	feet
Padre Island (South End)	(26°04'N/97°09'W)	1.5	1.4	0.2

NOTE: Inside, in the various bays, except near the inlets, the periodic tide has a mean range of less than 0.5 feet.

Dashes (- - -) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from http://tidesandcurrents.noaa.gov. (Mar 2012)

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)
Aids to Navigation (lights are white unless otherwise indicated):

AERO aeronautical, Al alternating, B black, Bn beacon, C can, DIA diaphone, F fixed, Fl flashing, G green, IQ interrupted quick, Iso isophase, LT HO lighthouse, M nautical mile, m minutes, MICRO TR microwave tower, Mkr marker, Mo morse code, N nun, OBSC obscured, Oc occulting, Or orange, Osc oscillating, Q quick, R red, Ra Ref radar reflector, R Bn radiobeacon, R TR radio tower, Rot rotating, s seconds, SEC sector, St M statute miles, VQ very quick, W white, WHIS whistle, Y yellow

Bottom characteristics:
Blds boulders, bk broken, Cy clay, Co coral, G gravel, Grs grass, gy gray, h hard, M mud, Oys oysters, Rk rock, S sand, so soft, Sh shells, sy sticky

Miscellaneous:
AUTH authorized, ED existence doubtful, Obstn obstruction, PA position approximate, PD position doubtful, Rep reported, Subm submerged
21 Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(2) Rocks that cover and uncover, with heights in feet above datum of soundings.
COLREGS: International Regulations for Preventing Collisions at Sea, 1972.
Demarcation lines are shown thus: — — —

HEIGHTS
Heights in feet above Mean High Water.

AUTHORITIES
Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

HORIZONTAL DATUM
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 1.206" northward and 0.943" westward to agree with this chart.

INTRACOASTAL WATERWAY
(use charts 11306 and 11308)
The project depth is 12 feet from Aransas Pass to Port Isabel, Texas.
The controlling depths are published periodically in the U.S. Coast Guard Local Notice to Mariners.

CAUTION
Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

CAUTION
Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 5 for important supplemental information.

RADAR REFLECTORS
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

POLLUTION REPORTS
Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

AIDS TO NAVIGATION
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

NOAA WEATHER RADIO BROADCASTS
The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Brownsville, TX	KHB-33	162.55 MHz
Corpus Christi, TX	KHB-41	162.55 MHz
Riviera, TX	WNG-609	162.525 MHz

PRINT-ON-DEMAND CHARTS
NOAA and its partner, OceanGrafix, offer this chart updated weekly by NOAA for Notices to Mariners and critical corrections. Charts are printed when ordered using Print-on-Demand technology. New Editions are available 2-8 weeks before their release as traditional NOAA charts. Ask your chart agent about Print-on-Demand charts or contact NOAA at http://ocsdata.ncd.noaa.gov/idrs/inquiry.aspx, or OceanGrafix at 1-877-56CHART or http://www.oceangrafix.com.

SOURCE DIAGRAM
The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE
B4 1900-1939 NOS Surveys partial bottom coverage

HURRICANES AND TROPICAL STORMS
Hurricanes, tropical storms and other major storms may cause considerable damage to marine structures, aids to navigation and moored vessels, resulting in submerged debris in unknown locations.
Charted soundings, channel depths and shoreline may not reflect actual conditions following these storms. Fixed aids to navigation may have been damaged or destroyed. Buoys may have been moved from their charted positions, damaged, sunk, extinguished or otherwise made inoperative. Mariners should not rely upon the position or operation of an aid to navigation. Wrecks and submerged obstructions may have been displaced from charted locations. Pipelines may have become uncovered or moved.
Mariners are urged to exercise extreme caution and are requested to report aids to navigation discrepancies and hazards to navigation to the nearest United States Coast Guard unit.

PORT MANSFIELD CHANNEL DEPTHS
TABULATED FROM SURVEYS BY THE CORPS OF ENGINEERS - REPORT OF FEB 2012

NAME OF CHANNEL	LEFT OUTSIDE QUARTER	MIDDLE HALF OF CHANNEL	RIGHT OUTSIDE QUARTER	DATE OF SURVEY	WIDTH (FEET)	LENGTH (MILES)	DEPTH MLLW (FEET)
ENTRANCE CHANNEL	4.4	4.4	4.4	1-11	250	0.7	16
MILE 0.7 TO MILE 1.3	11.8	13.3	12.9	1-11	100-300	0.6	14
MILE 1.3 TO MILE 3	9.9	10.3	10.1	5-10	100	1.7	14
MILE 3 TO MILE 6	12.3	12.7	12.7	5-10	100	3.0	14
MILE 6 TO MAIN CHANNEL	14.2	14.1	14.2	5-10	100	2.9	14
ENTRANCE CURVES	7.4	7.5	7.9	5-10	200	0.6	12
MAIN CHANNEL TO TURNING BASIN	14.7	15.4	14.4	5-10	125-200	0.9	14
TURNING BASIN	13.1	14.3	13.5	5-10	200-400	0.7	14
SHRIMP BASIN (26°33'06"N, 97°25'53"W)	12.1	12.3	12.2	5-10	350	0.3	12
SMALL CRAFT BASIN (26°33'06"N, 97°25'45"W)	8.0	8.0	8.0	9-88	160	—	—

CONTROLLING DEPTHS FROM SEAWARD IN FEET AT MEAN LOWER LOW WATER (MLLW); PROJECT DIMENSIONS

NOTE - CONSULT THE CORPS OF ENGINEERS FOR CHANGES SUBSEQUENT TO THE ABOVE INFORMATION

NOTE X
Within the 12-nautical mile Territorial Sea, established by Presidential Proclamation, some Federal laws apply. The Three Nautical Mile Line, previously identified as the outer limit of the territorial sea, is retained as it continues to depict the jurisdictional limit of the other laws. The 9-nautical mile Natural Resource Boundary off the Gulf coast of Florida, Texas, and Puerto Rico, and the Three Nautical Mile Line elsewhere remain in most cases the inner limit of Federal fisheries jurisdiction and the outer limit of the jurisdiction of the states. The 24-nautical mile Contiguous Zone and the 200-nautical mile Exclusive Economic Zone were established by Presidential Proclamation. Unless fixed by treaty or the U.S. Supreme Court, these maritime limits are subject to modification.

NOTE S
Regulations for Ocean Dumping Sites are contained in 40 CFR, Parts 220-229. Additional information concerning the regulations and requirements for use of the sites may be obtained from the Environmental Protection Agency (EPA). See U.S. Coast Pilots appendix for addresses of EPA offices. Dumping subsequent to the survey dates may have reduced the depths shown.

This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additions, or comments for improving this chart to the Chief, Marine Chart Division (N/CS2), National Ocean Service, NOAA, Silver Spring, Maryland 20910-3282.

MINERAL DEVELOPMENT STRUCTURES
Obstruction lights and sound (fog) signals are required for fixed mineral development structures shown on this chart, subject to approval by the District Commander, U.S. Coast Guard (33 CFR 67).

NOTE A
Navigation regulations are published in Chapter 2, U.S. Coast Pilot 5. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 8th Coast Guard District in New Orleans, LA, or at the Office of the District Engineer, Corps of Engineers in Galveston, TX. Refer to charted regulation section numbers.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

SCALE 1:80,000
Nautical Miles / Yards / Meters

14th Ed., Apr. /12 ■ Corrected through NM Apr. 7/12
Corrected through LNM Mar. 27/12

11304

CAUTION
This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

SOUNDINGS IN FEET

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
FEET	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102

Northern Part of Laguna Madre
SOUNDINGS IN FEET - SCALE 1:80,000

11304

NSN 7642014010176
NGA REFERENCE NO. 11BCO11304
ED. NO. 14