12282

Formerly C&GS 566, 1st Ed., Nov 1933 G-1948-722, Kapp 641

Nautical Chart Catalog No. 1, Panel D

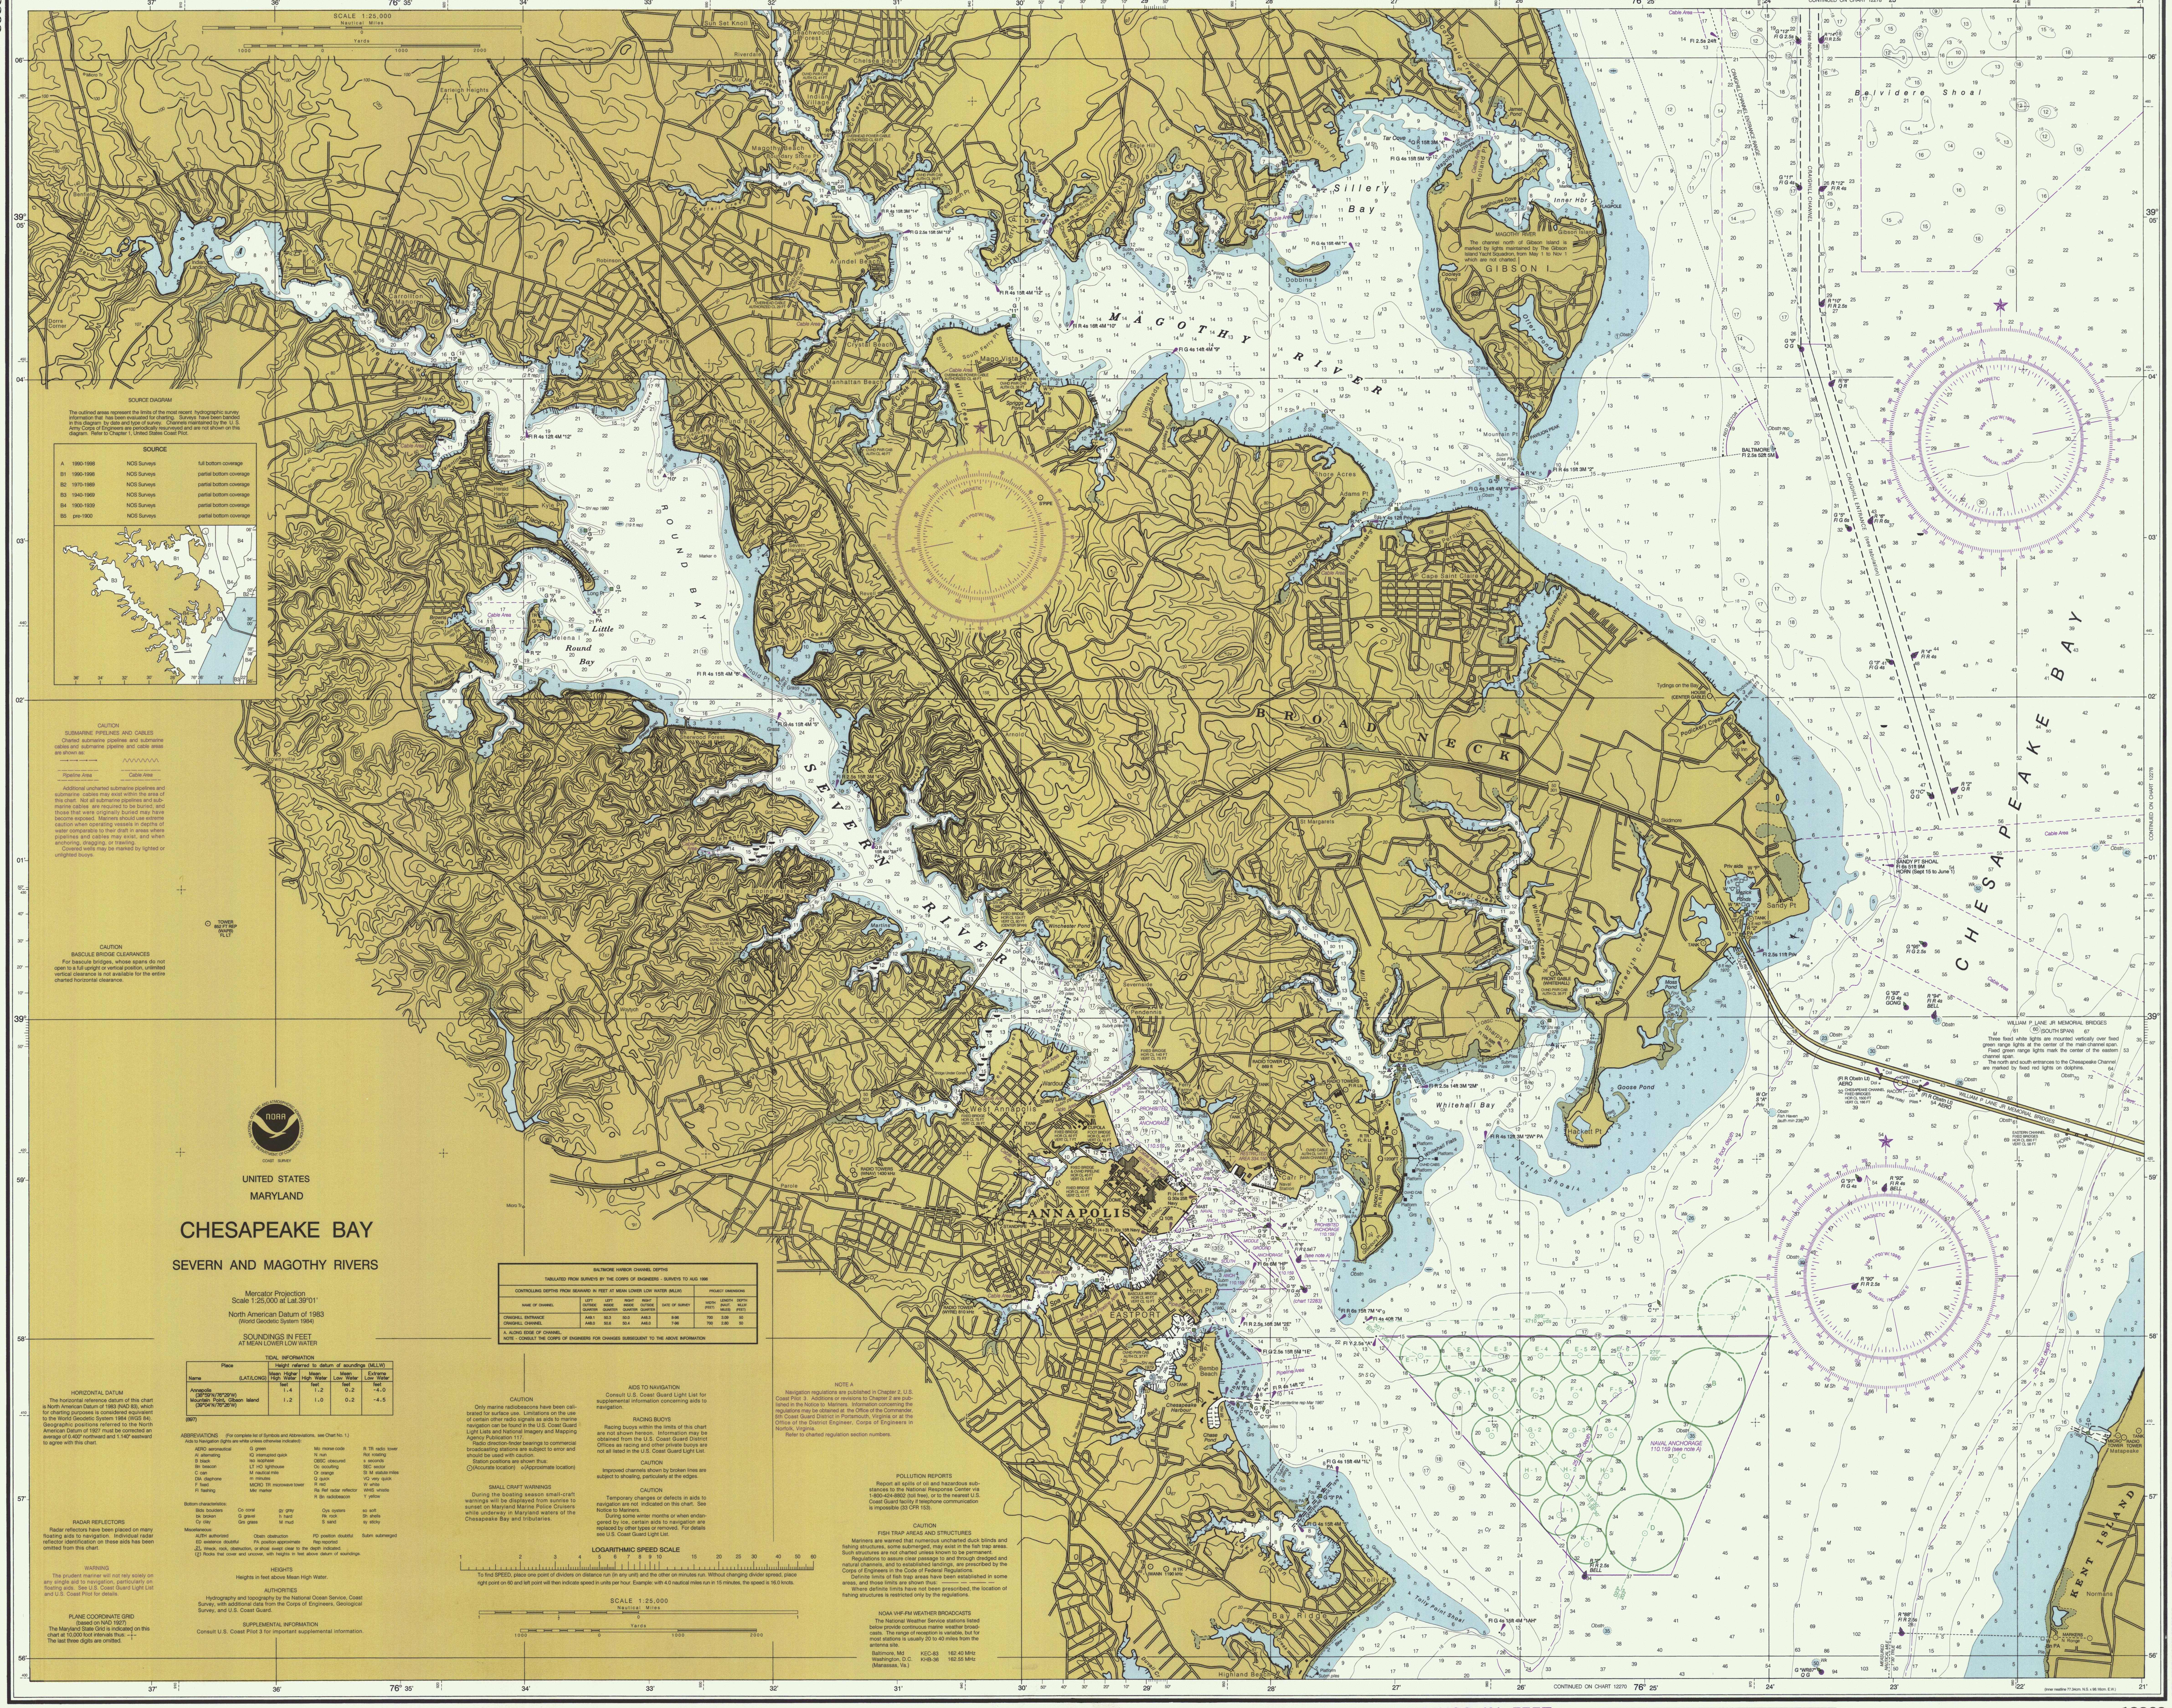

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U. S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE			
A	1990-1998	NOS Surveys	full bottom coverage
B1	1990-1998	NOS Surveys	partial bottom coverage
B2	1970-1989	NOS Surveys	partial bottom coverage
B3	1940-1969	NOS Surveys	partial bottom coverage
B4	1900-1939	NOS Surveys	partial bottom coverage
B5	pre-1900	NOS Surveys	partial bottom coverage

CAUTION
SUBMARINE PIPELINES AND CABLES

Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:

Pipeline Area — Cable Area

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.

Covered wells may be marked by lighted or unlighted buoys.

CAUTION
BASCULE BRIDGE CLEARANCES

For bascule bridges, whose spans do not open to a full upright or vertical position, unlimited vertical clearance is not available for the entire charted horizontal clearance.

UNITED STATES
MARYLAND

CHESAPEAKE BAY

SEVERN AND MAGOTHY RIVERS

Mercator Projection
Scale 1:25,000 at Lat.39°01'

North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

TIDAL INFORMATION

Place		Height referred to datum of soundings (MLLW)			
Name	(LAT/LONG)	Mean Higher High Water	Mean High Water	Mean Low Water	Extreme Low Water
		feet	feet	feet	feet
Annapolis	(38°59'N/76°29'W)	1.4	1.2	0.2	-4.0
Mountain Point, Gibson Island	(39°04'N/76°26'W)	1.2	1.0	0.2	-4.5

(897)

BALTIMORE HARBOR CHANNEL DEPTHS
TABULATED FROM SURVEYS BY THE CORPS OF ENGINEERS - SURVEYS TO AUG 1996

CONTROLLING DEPTHS FROM SEAWARD IN FEET AT MEAN LOWER LOW WATER (MLLW)						PROJECT DIMENSIONS		
NAME OF CHANNEL	LEFT OUTSIDE QUARTER	LEFT INSIDE QUARTER	RIGHT INSIDE QUARTER	RIGHT OUTSIDE QUARTER	DATE OF SURVEY	WIDTH (FEET)	LENGTH (NAUT. MILES)	DEPTH MLLW (FEET)
CRAIGHILL ENTRANCE	A49.1	50.3	50.0	A48.3	8-96	700	3.09	50
CRAIGHILL CHANNEL	A48.0	50.6	50.4	A48.0	7-96	700	2.80	50

A. ALONG EDGE OF CHANNEL.
NOTE - CONSULT THE CORPS OF ENGINEERS FOR CHANGES SUBSEQUENT TO THE ABOVE INFORMATION

HORIZONTAL DATUM

The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.400" northward and 1.140" eastward to agree with this chart.

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)
Aids to Navigation (lights are white unless otherwise indicated):

AERO aeronautical, Al alternating, B black, Bn beacon, C can, DIA diaphone, F fixed, Fl flashing, G green, IQ interrupted quick, Iso isophase, LT HO lighthouse, M nautical mile, m minutes, MICRO TR microwave tower, Mkr marker, Mo morse code, N nun, OBSC obscured, Oc occulting, Or orange, Q quick, R red, Ra Ref radar reflector, R Bn radiobeacon, R TR radio tower, Rot rotating, s seconds, SEC sector, St M statute miles, VQ very quick, W white, WHIS whistle, Y yellow

Bottom characteristics:
Blds boulders, bk broken, Cy clay, Co coral, G gravel, Grs grass, gy gray, h hard, M mud, Oys oysters, Rk rock, S sand, so soft, Sh shells, sy sticky

Miscellaneous:
AUTH authorized, ED existence doubtful, Obstn obstruction, PA position approximate, PD position doubtful, Rep reported, Subm submerged

(21) Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(2) Rocks that cover and uncover, with heights in feet above datum of soundings.

HEIGHTS

Heights in feet above Mean High Water.

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 3 for important supplemental information.

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

PLANE COORDINATE GRID
(based on NAD 1927)

The Maryland State Grid is indicated on this chart at 10,000 foot intervals thus: -|- The last three digits are omitted.

CAUTION

Only marine radiobeacons have been calibrated for surface use. Limitations on the use of certain other radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Imagery and Mapping Agency Publication 117.

Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.

Station positions are shown thus:
⊙(Accurate location) o(Approximate location)

SMALL CRAFT WARNINGS

During the boating season small-craft warnings will be displayed from sunrise to sunset on Maryland Marine Police Cruisers while underway in Maryland waters of the Chesapeake Bay and tributaries.

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

RACING BUOYS

Racing buoys within the limits of this chart are not shown hereon. Information may be obtained from the U.S. Coast Guard District Offices as racing and other private buoys are not all listed in the U.S. Coast Guard Light List.

CAUTION

Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Notice to Mariners.

During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details see U.S. Coast Guard Light List.

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 3. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 5th Coast Guard District in Portsmouth, Virginia or at the Office of the District Engineer, Corps of Engineers in Norfolk, Virginia.

Refer to charted regulation section numbers.

LOGARITHMIC SPEED SCALE

To find SPEED, place one point of dividers on distance run (in any unit) and the other on minutes run. Without changing divider spread, place right point on 60 and left point will then indicate speed in units per hour. Example: with 4.0 nautical miles run in 15 minutes, the speed is 16.0 knots.

SCALE 1:25,000

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

CAUTION
FISH TRAP AREAS AND STRUCTURES

Mariners are warned that numerous uncharted duck blinds and fishing structures, some submerged, may exist in the fish trap areas. Such structures are not charted unless known to be permanent.

Regulations to assure clear passage to and through dredged and natural channels, and to established landings, are prescribed by the Corps of Engineers in the Code of Federal Regulations.

Definite limits of fish trap areas have been established in some areas, and those limits are shown thus: — — — —

Where definite limits have not been prescribed, the location of fishing structures is restricted only by the regulations.

NOAA VHF-FM WEATHER BROADCASTS

The National Weather Service stations listed below provide continuous marine weather broadcasts. The range of reception is variable, but for most stations is usually 20 to 40 miles from the antenna site.

Baltimore, Md	KEC-83	162.40 MHz
Washington, D.C. (Manassas, Va.)	KHB-36	162.55 MHz

32nd Ed., Apr 25/98

12282

CAUTION

This chart has been corrected from the Notice to Mariners published weekly by the National Imagery and Mapping Agency and the Local Notice to Mariners issued periodically by each U.S. Coast Guard district to the date shown in the lower left hand corner.

This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additions, or comments for improving this chart to the Chief, Marine Chart Division (N/CS2), National Ocean Service, NOAA, Silver Spring, Maryland 20910-3282.

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
FEET	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102

Severn and Magothy Rivers
SOUNDINGS IN FEET - SCALE 1:25,000

12282

NSN 7642014010351
NIMA STOCK NO. 12BHA12282
ED. NO. 32