U.S. DEPARTMENT OF COMMERCE / National Oceanic and Atmospheric Administration

FEDERAL COORDINATOR FOR METEOROLOGICAL SERVICES AND SUPPORTING RESEARCH

QC

959

. U6


N28

1980



National Hurricane Operations Plan



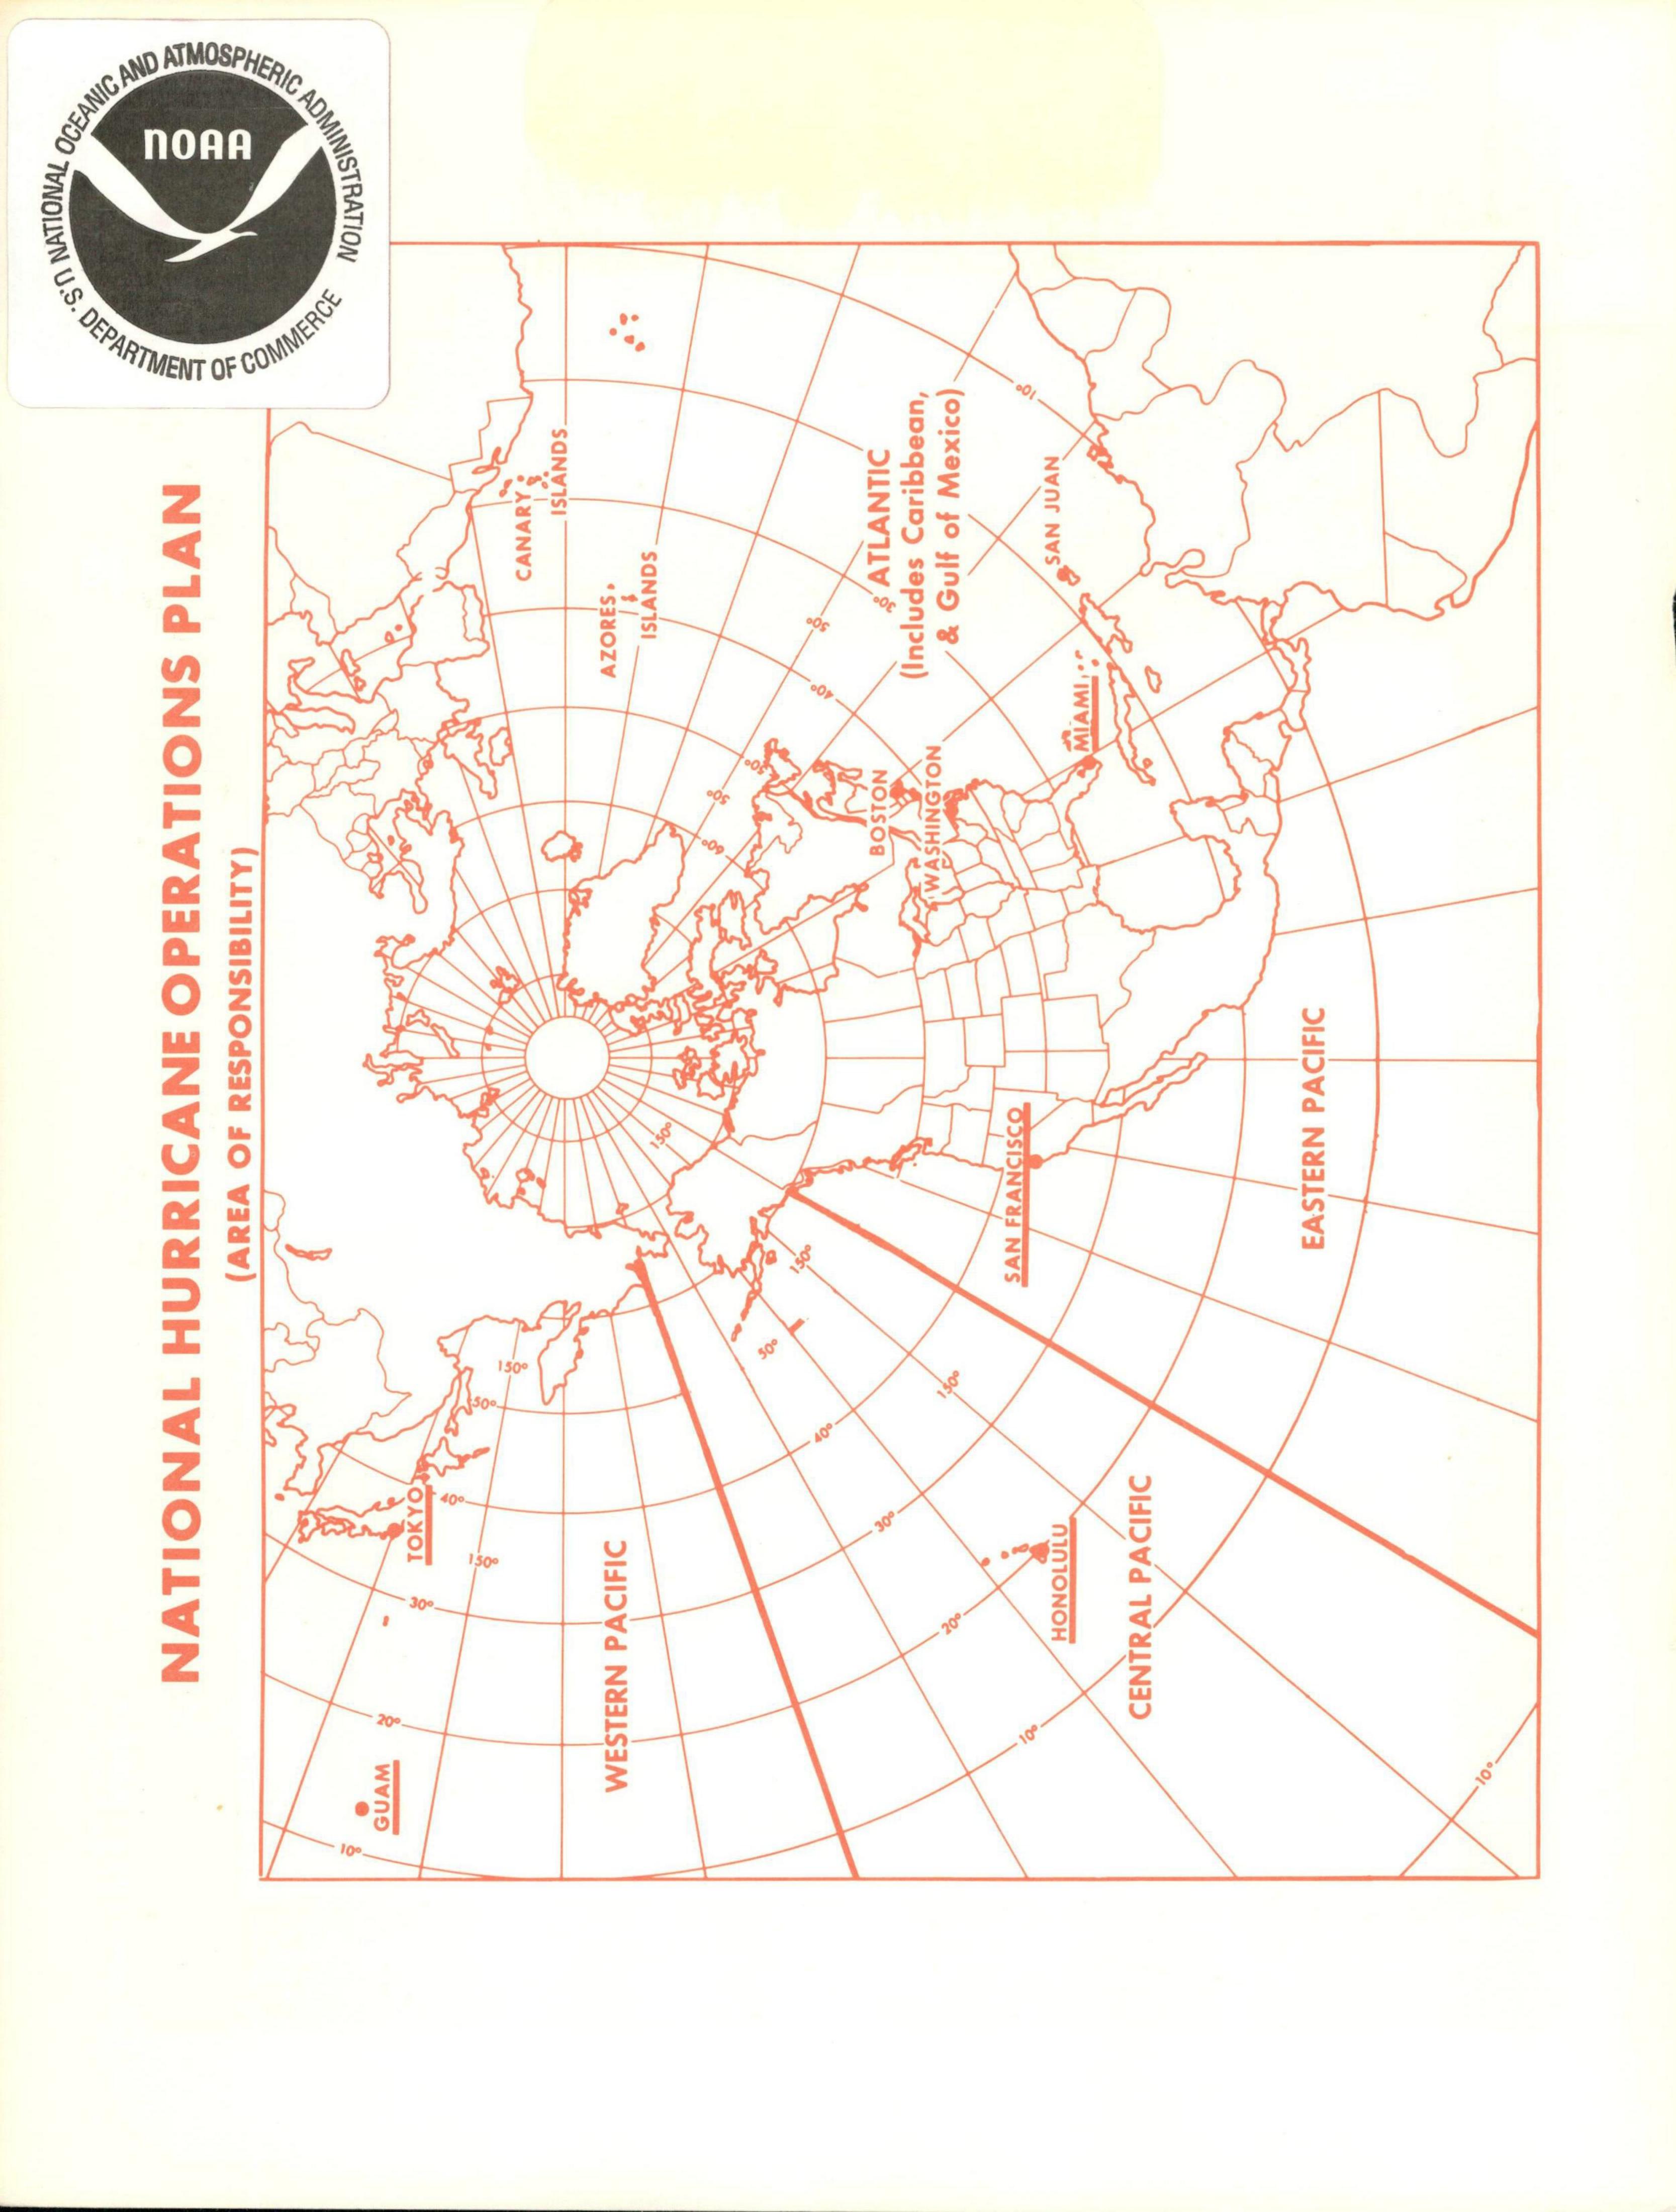

U.S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION White flate, office of FEDERAL COORDINATOR FOR METEOROLOGICAL SERVICES AND SUPPORTING RESEARCH,

NATIONAL HURRICANE OPERATIONS PLAN



FCM 80-2 Washington, DC May 1980

.

JUN 1 6 1980 N.O.A.A. U. S. Dept. of Commerce


FOREWORD

An Interdepartmental Plan was first issued in 1962. This document is the 18th edition and presents procedures and agreements reached at the 34th annual Conference held at the USAF Conference Center, Homestead Air Force Base, FL, 22-25 January 1980.

The Conference is sponsored annually by the Subcommittee on Basic Services, Interdepartmental Committee For Meteorological Services and Supporting Research, and brings together cognizant Federal agencies to achieve agreement on items of mutual concern related to hurricane warning services. The host this year for the Conference was the Air Weather Service of the Military Airlift Command, United States Air Force.

1. B. Dun

T. B. Owen Federal Coordinator for Meteorological Services and Supporting Research

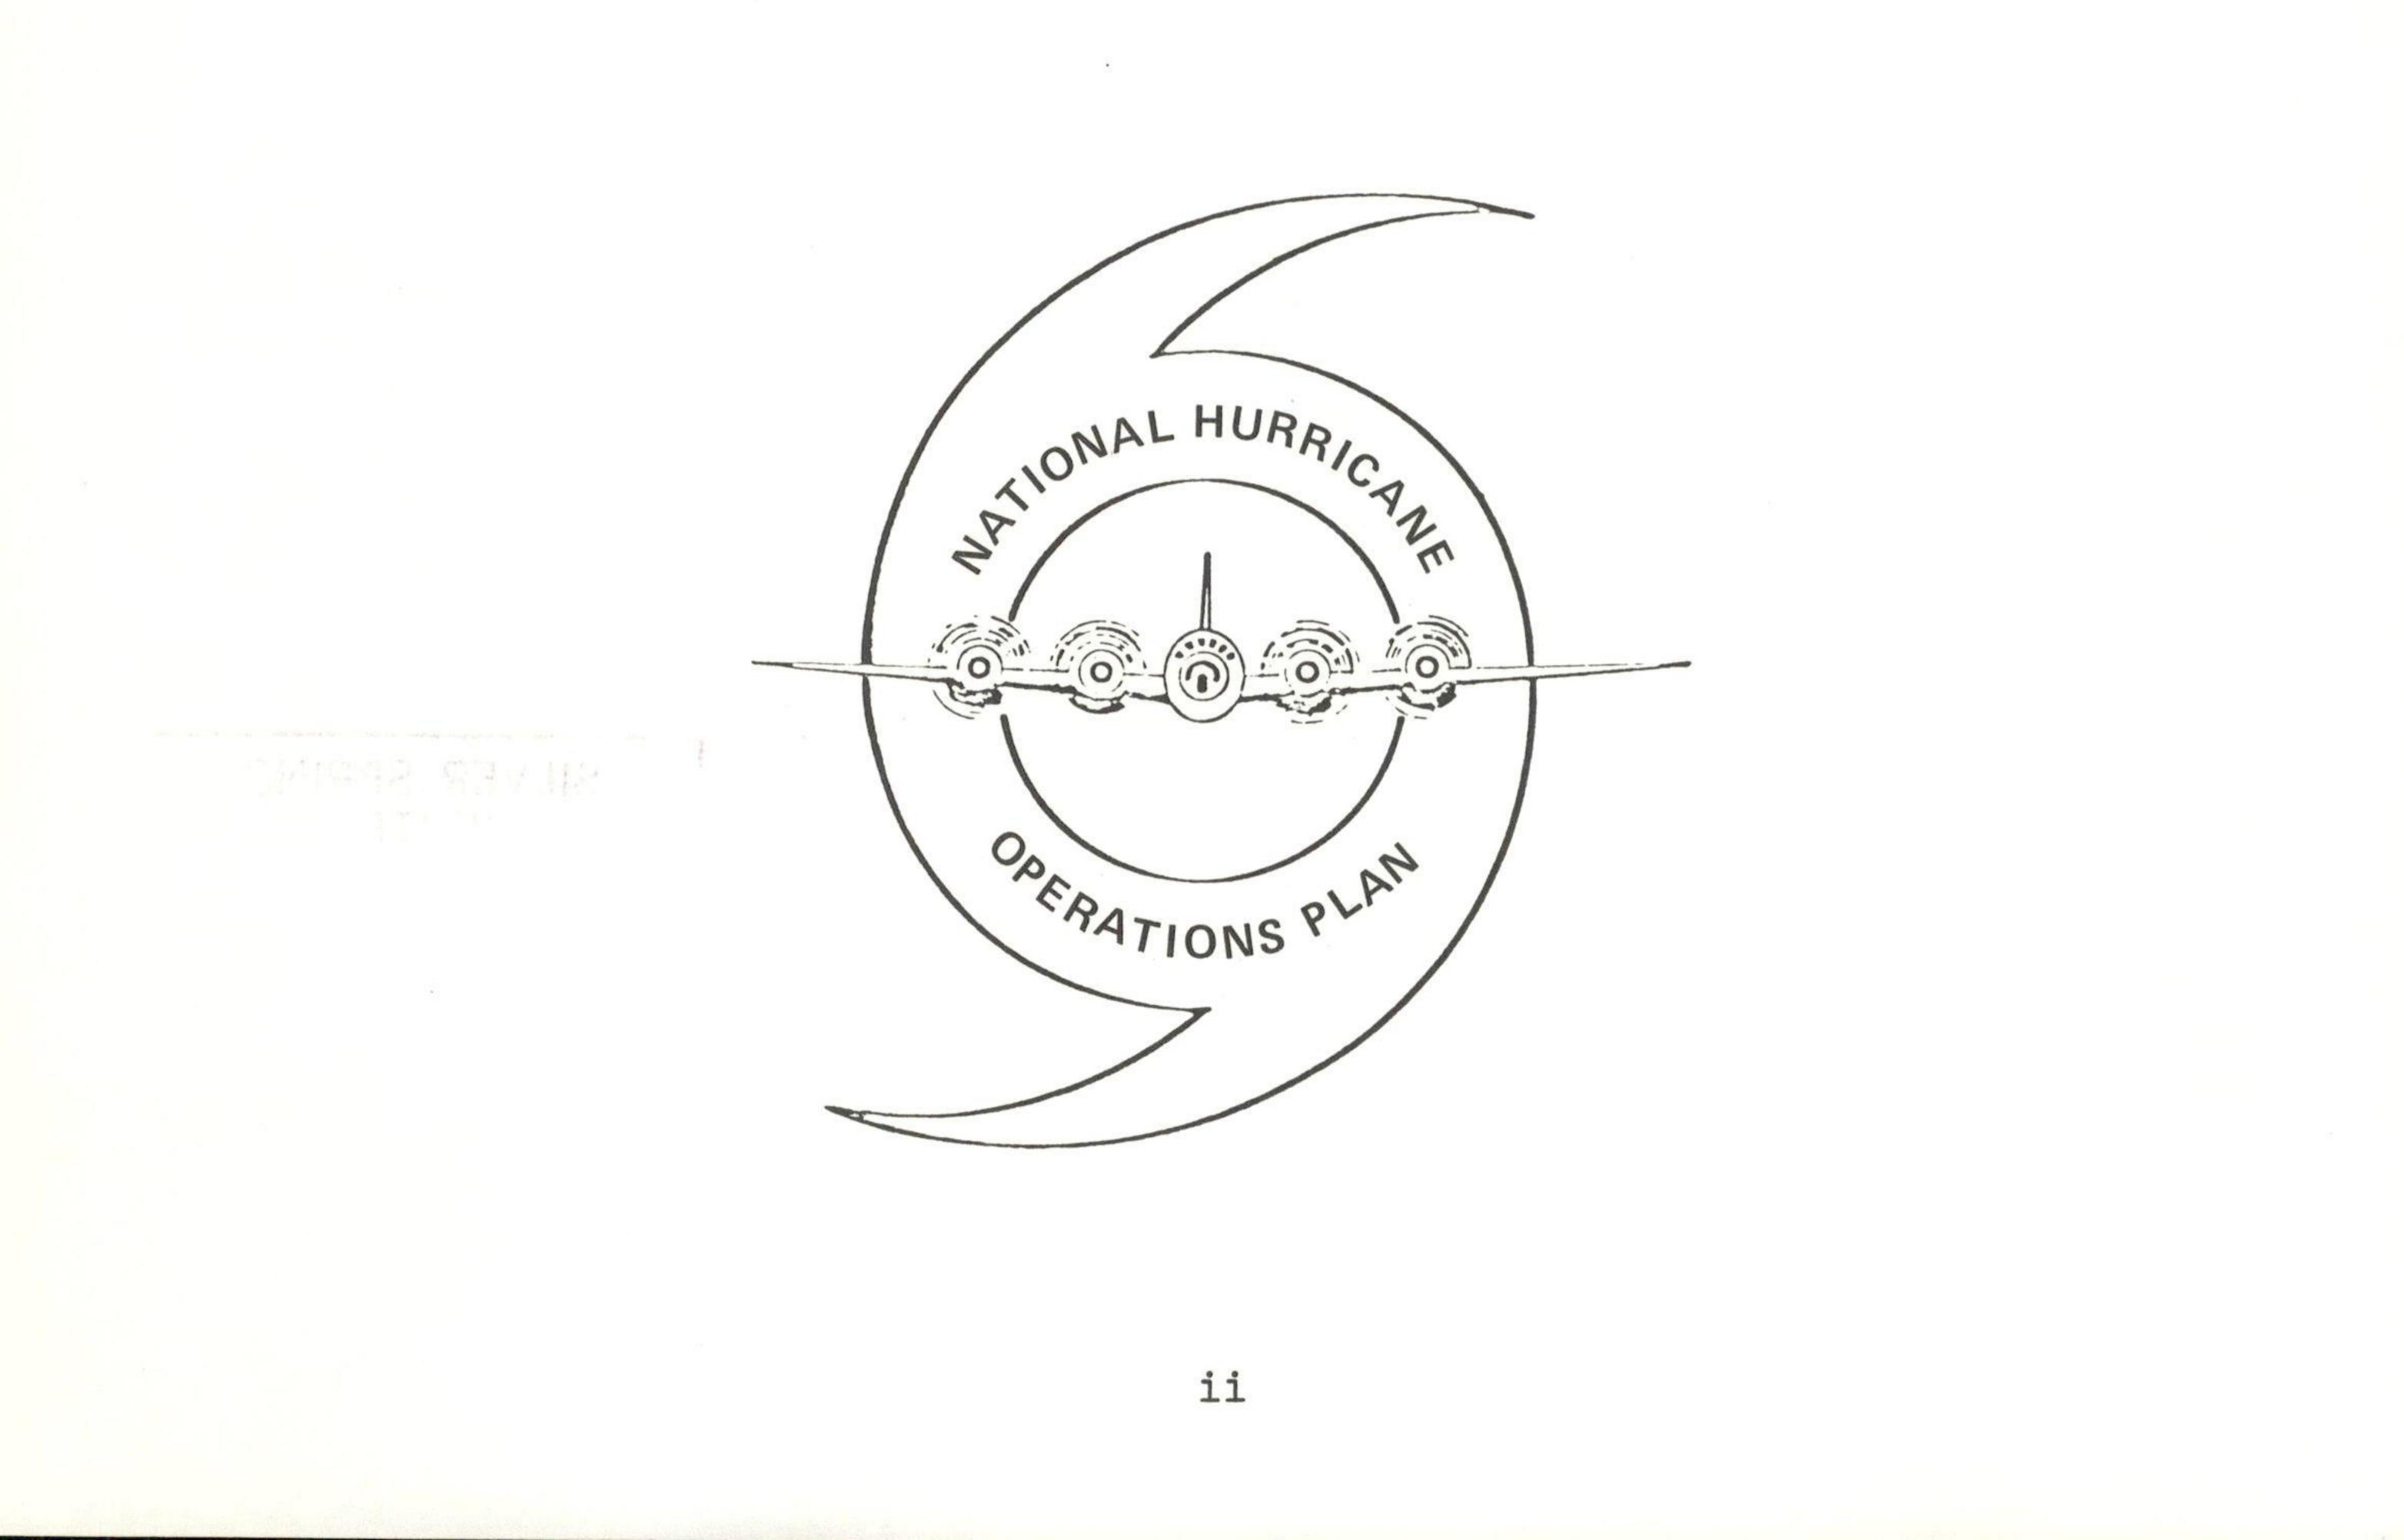

NATIONAL HURRICANE OPERATIONS PLAN

(ATLANTIC, EASTERN PACIFIC, AND CENTRAL PACIFIC)

CONTENTS

		Pa	ge
Foreword	• • • • • • • • • • • • • • • • • • •	. i	i
Chapter 1.	Introduction	•	1
Chapter 2.	Responsibilities of Cooperating Agencies	•	5

-	-		

Chapter 3.	Observations, Forecasts, and Related Information to be Furnished by NWS to DOD	9
	Appendix AForm 1 (WS Form C-13) Appendix BHurricane Names Appendix CSaffir/Simpson Hurricane Scale	14
Chapter 4.	Aircraft Reconnaissance	19
	Appendix A:	
	Attachment 1Operational Flight Pattern "A" Attachment 1aRecommended Pattern "A" Execution Attachment 2Operational Flight Pattern "B" Attachment 3Operational Flight Patterns	29 30
	C-1 through $C-4$	31

Attachment 4 -- Operational Flight Pattern Delta 35

Appendix B:

Appendix C--Aircraft Reconnaissance Communications..... 42

Appendix D--Reconnaissance Organization Communication Capabilities......44



CONTENTS (Continued)

Page


Chapter	5.	Satellite Surveillance of Tropical and Subtropical Cyclones	45
		Appendix A:	
		Attachment 1GOESOperational Data Flow Attachment 2Satellites and Satellite Data	47


Availability 48


Appendix B:


	Appendix AList of Marine Tropical Cyclone Forecast Broadcast Stations	60
Chapter 9.	Warning Transfer Policies	61
Chapter 10.	Publicity	63
	Appendix AAbbreviations as Used in This Plan	64


NOTE: The symbol (#) indicates a significant change from the previous edition.



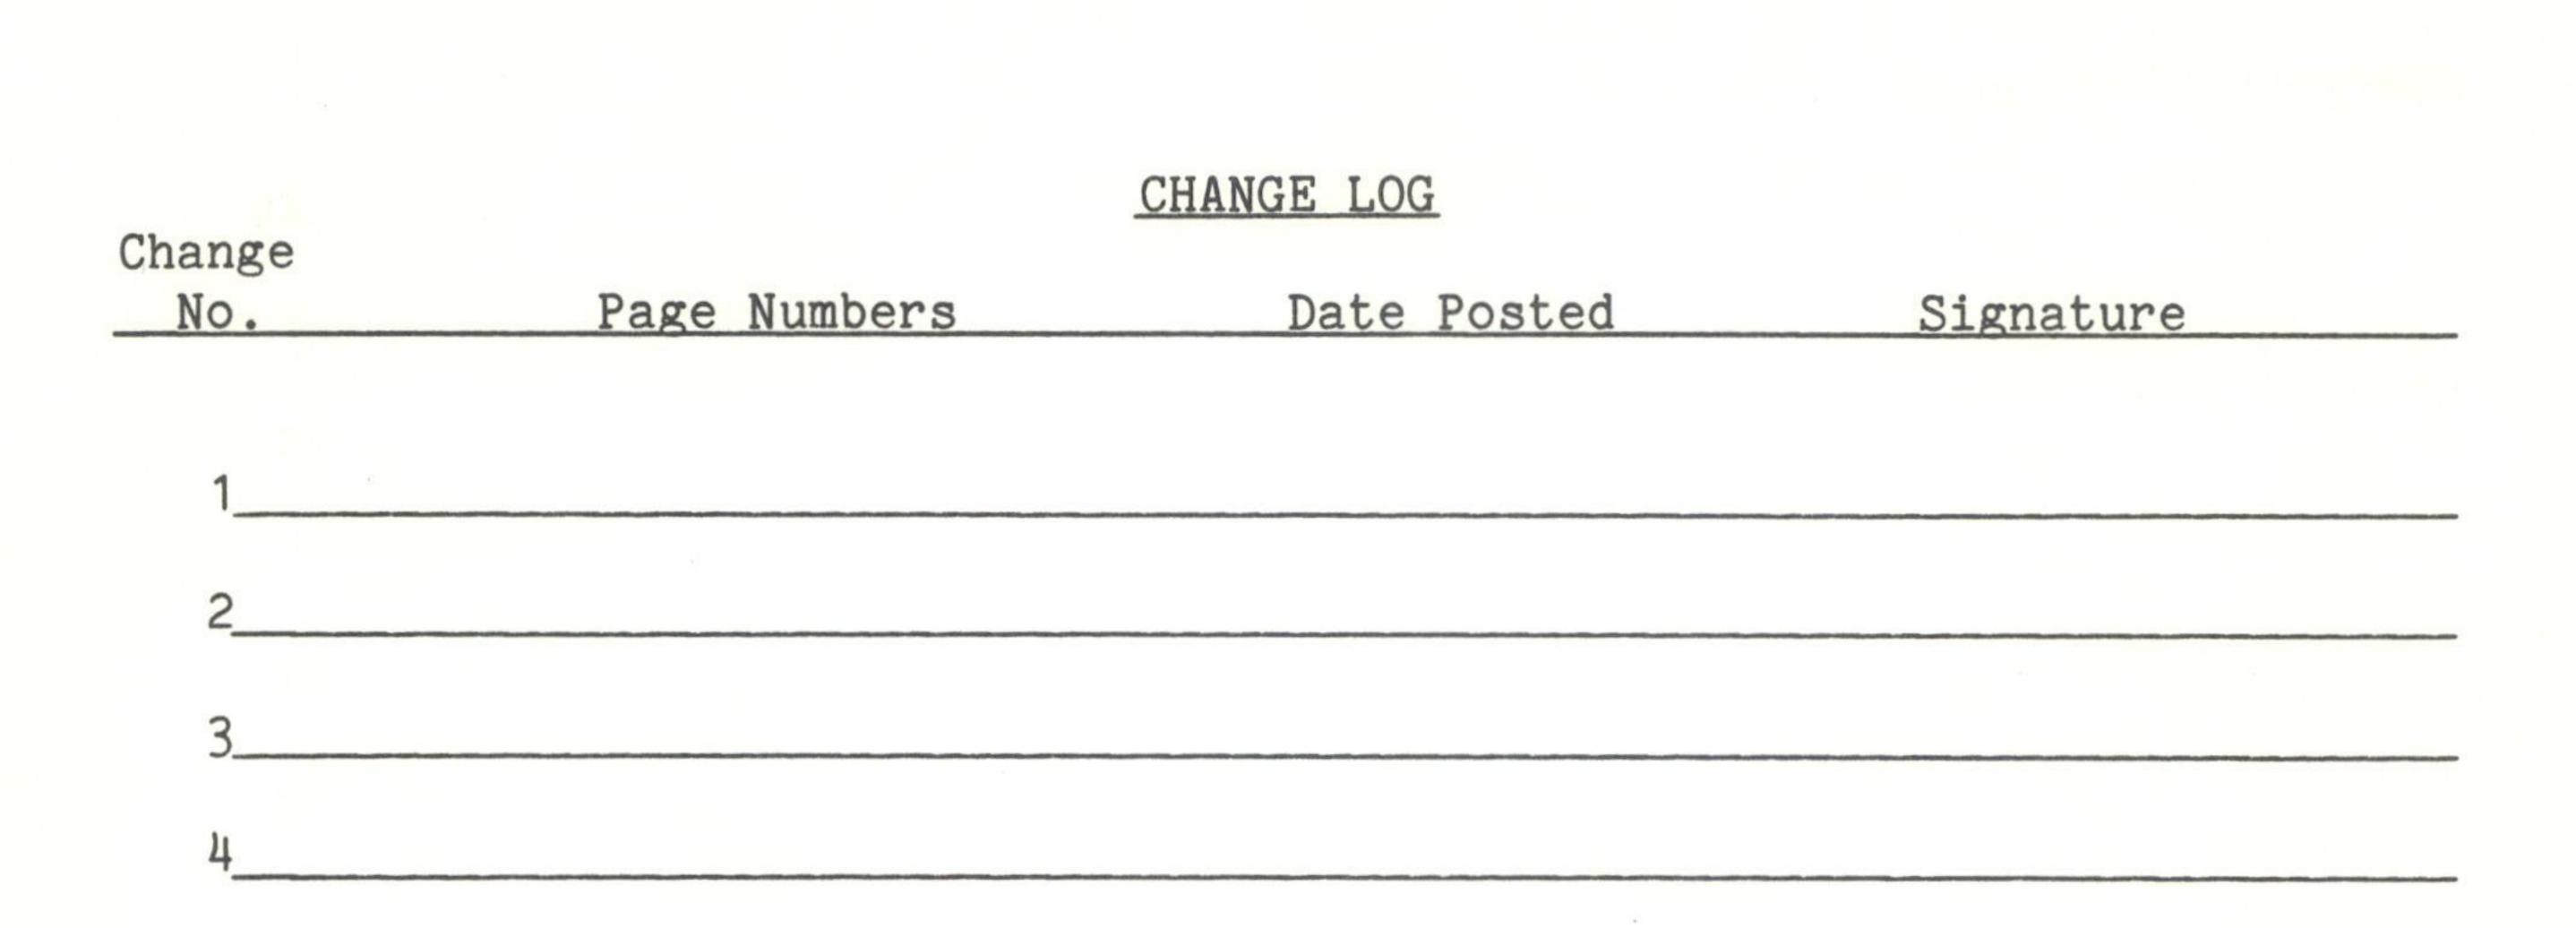

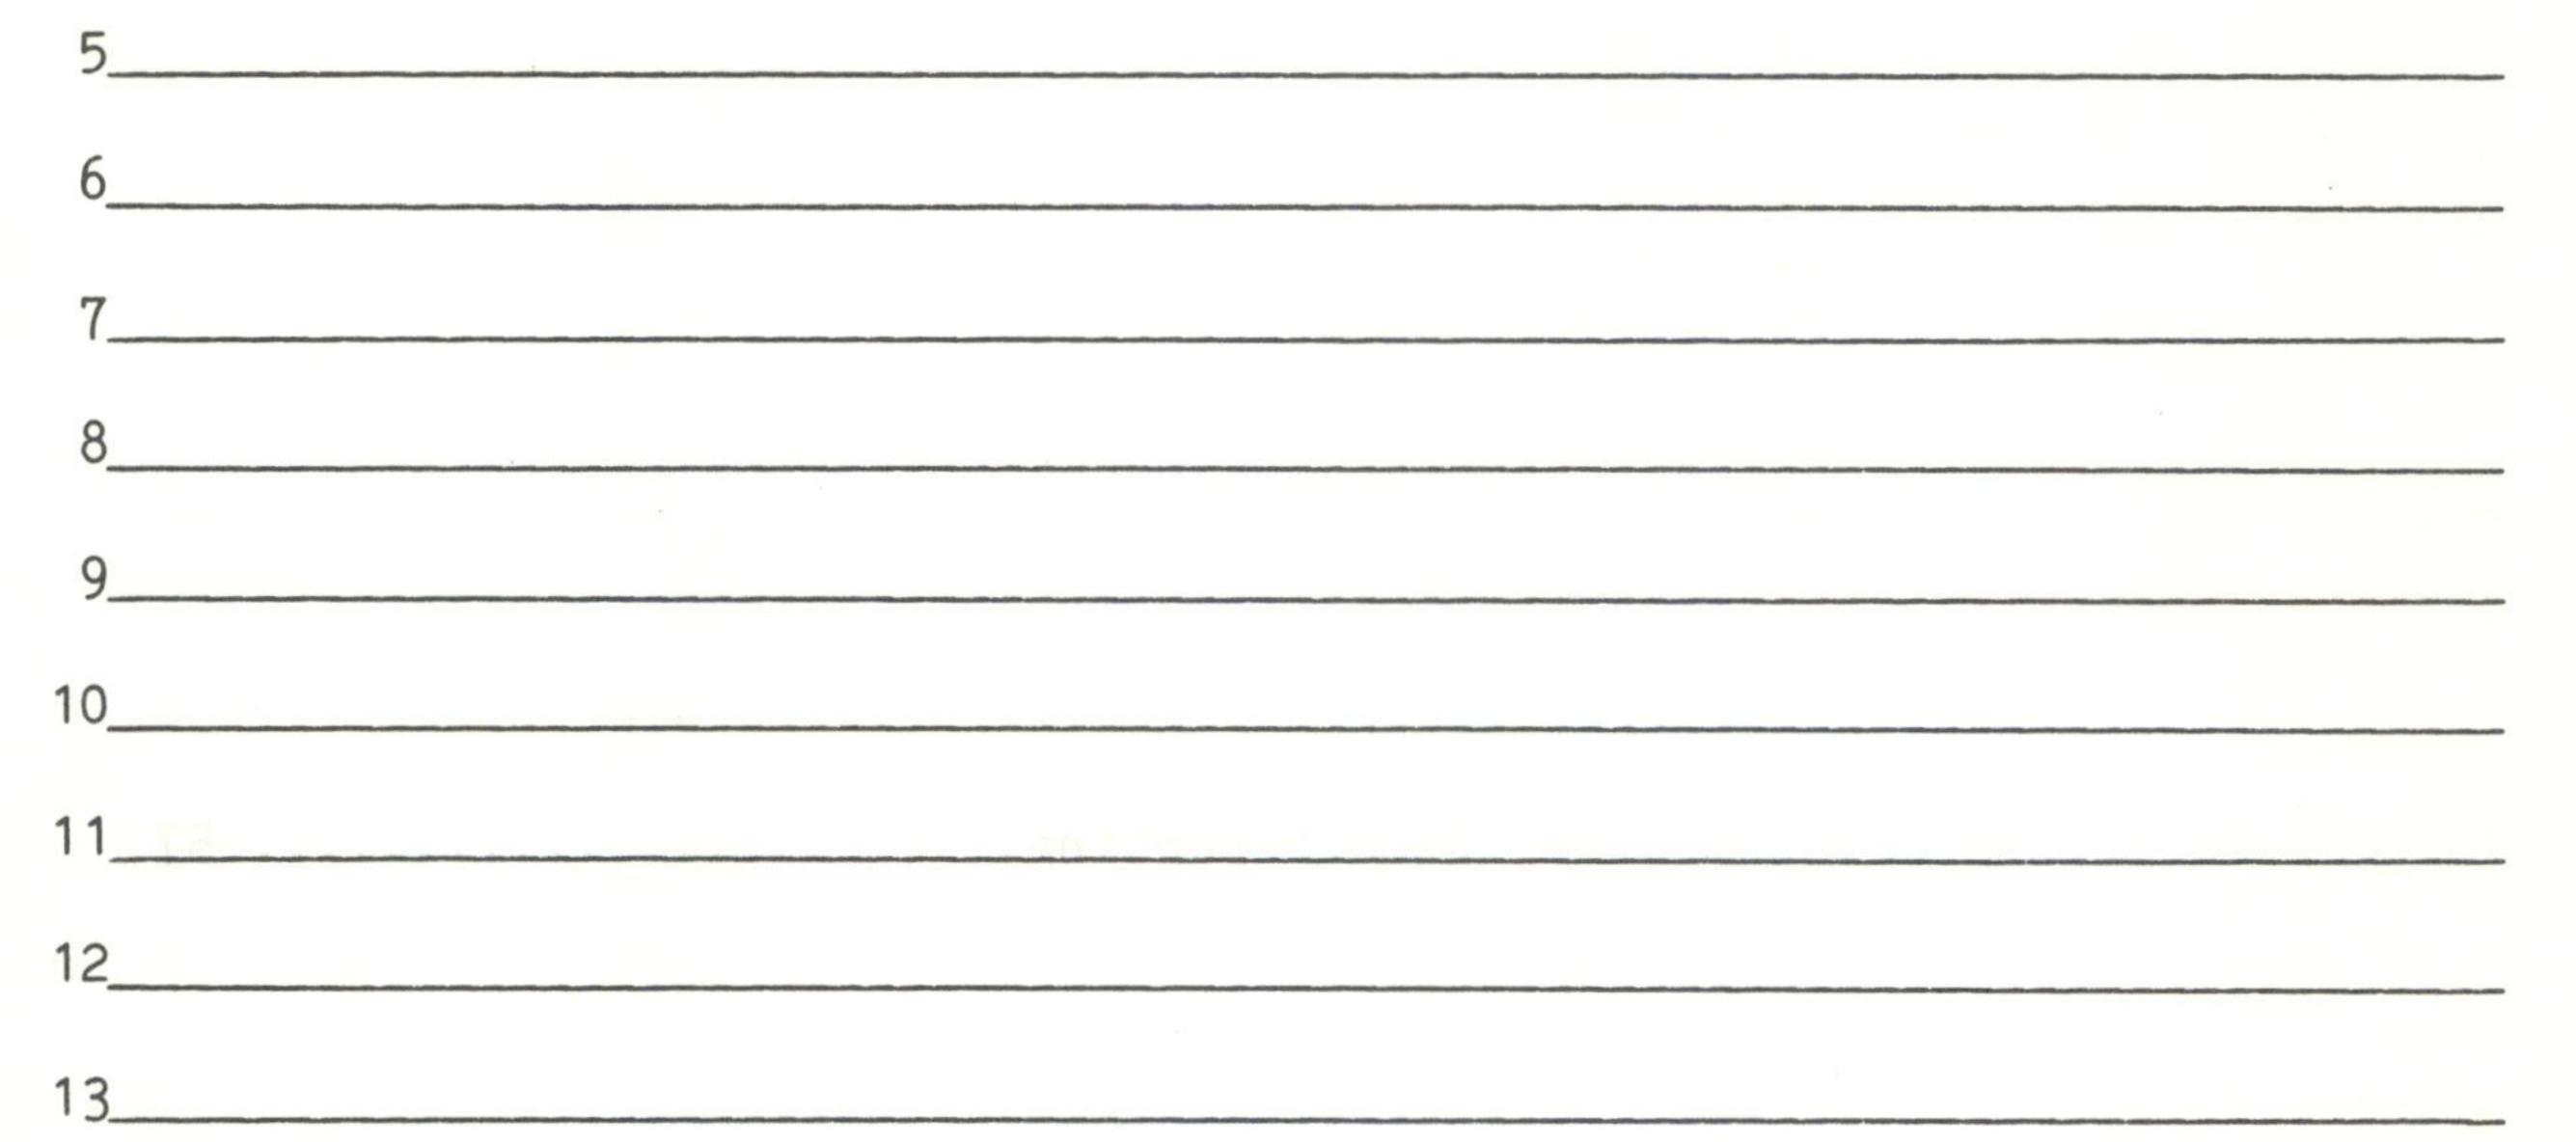

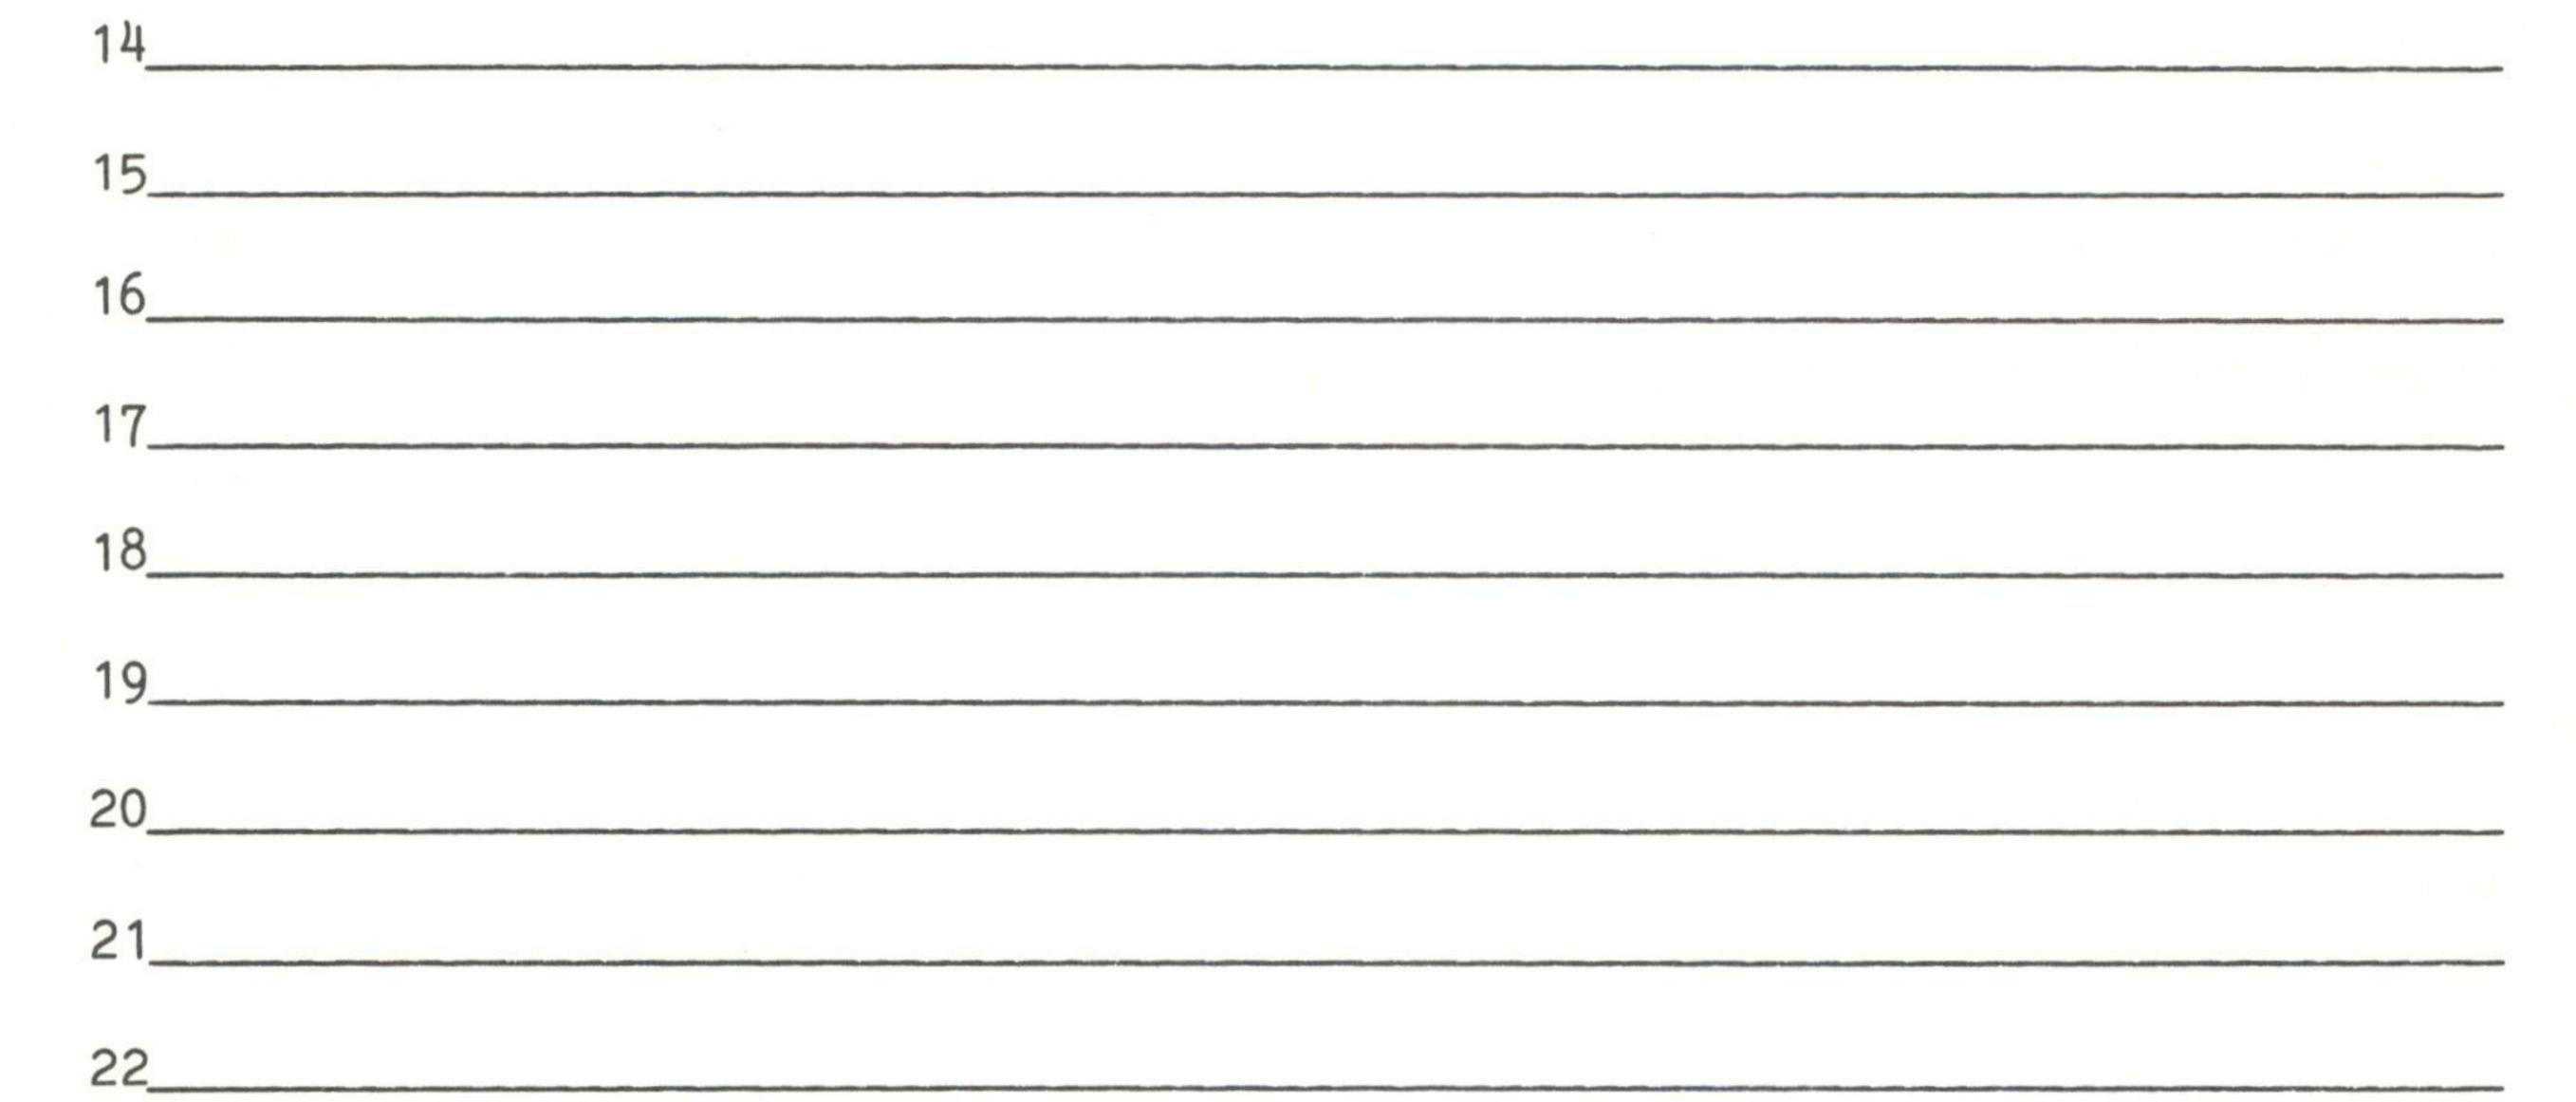

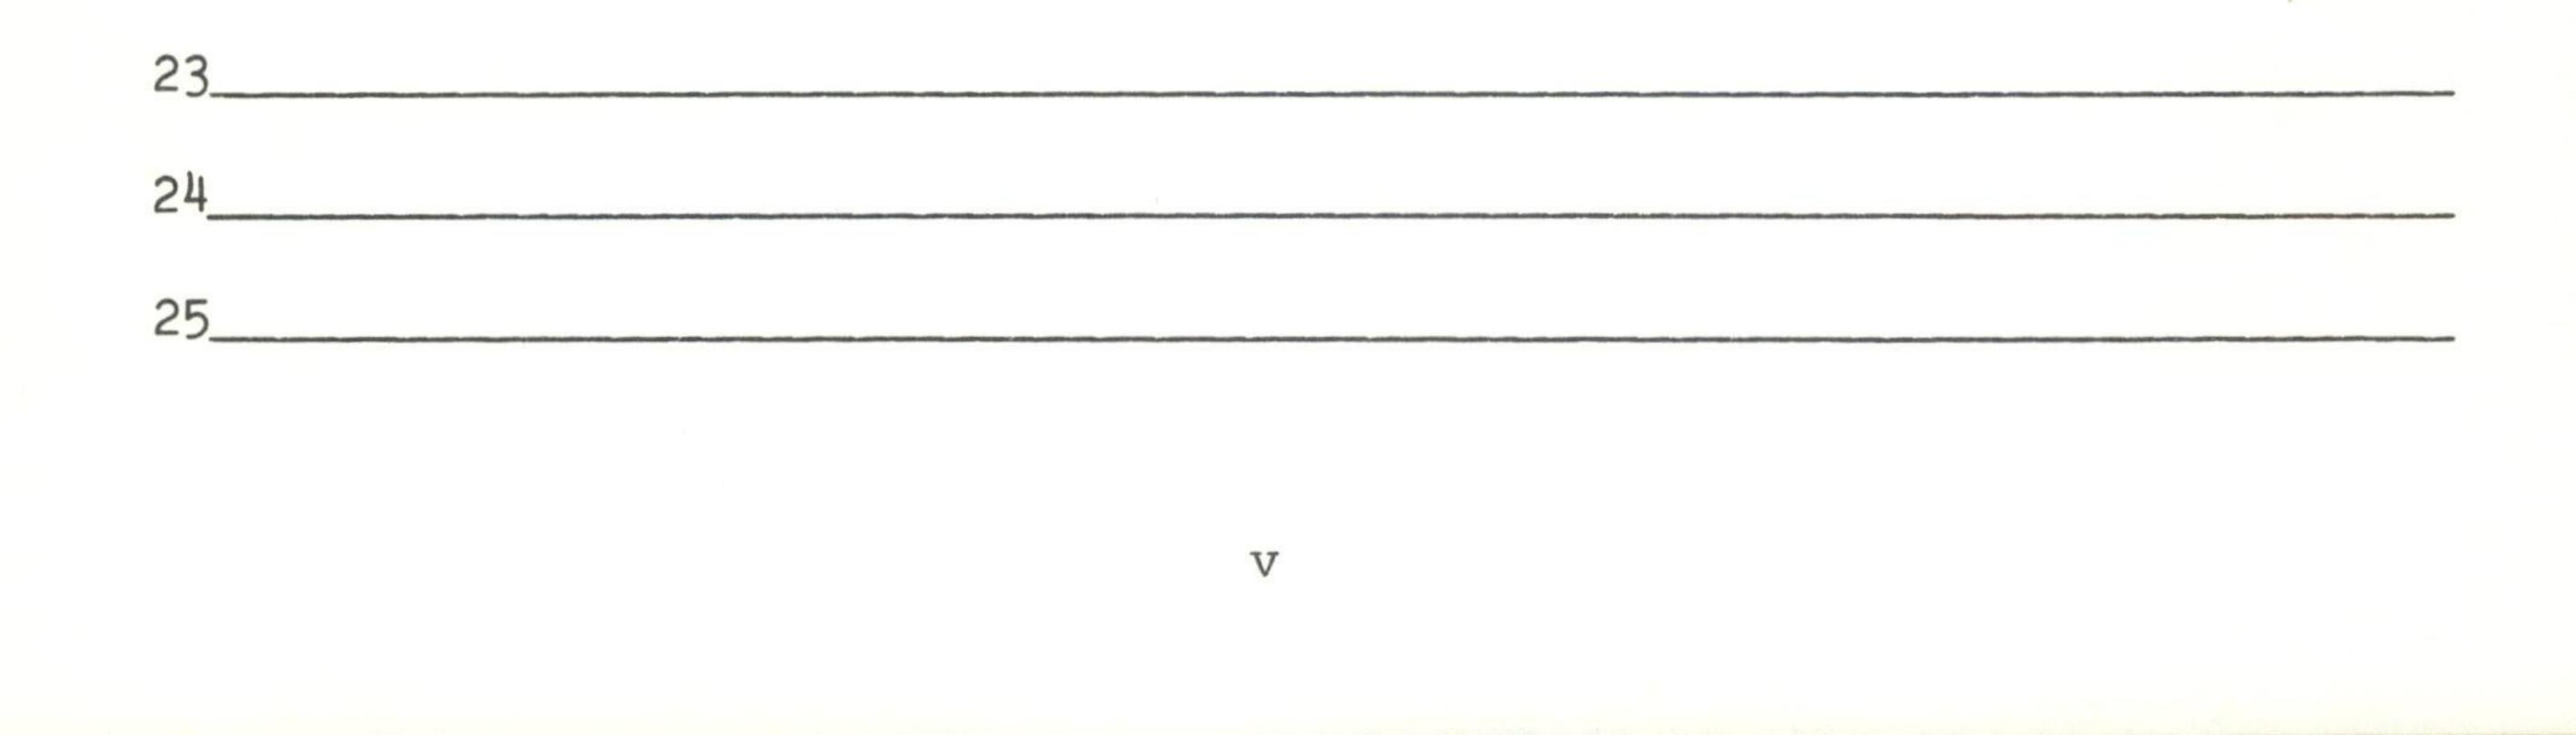

INTRODUCTION

1. <u>Introduction</u>. The Hurricane Warning Service is an interdepartmental effort to provide the Nation and designated international recipients with environmental data, forecasts, and assessments concerning tropical and subtropical weather systems. Interdepartmental cooperation achieves economy and efficiency in the operation of the Hurricane Warning Service. This plan provides the basis for implementing the agreements of the Department of Commerce (DOC), Department of Defense (DOD), and the Department of Transportation (DOT) reached at the annual Interdepartmental Hurricane Warning Conference (combined Atlantic and Pacific). It is the 18th edition of the National Hurricane Operations Plan (first issued in 1962). The Hurricane

Conference is sponsored by the Subcommittee on Basic Services, Interdepartmental Committee for Meteorological Services and Supporting Research, to bring together cognizant Federal agencies and achieve agreement on items of mutual concern related to the Atlantic and Pacific hurricane warning services.

2. Terms used in this Plan.

a. <u>Center Fix</u> - the location of the center of a tropical or subtropical cyclone obtained by means other than reconnaissance aircraft penetration.

b. <u>Cyclone</u> - an atmospheric closed-circulation rotating counterclockwise in the Northern Hemisphere.

c. <u>Eye</u> - the relatively calm center of a tropical cyclone which is more than 1/2 surrounded by wall cloud.

d. <u>Hurricane Season</u> - the portion of the year having a relatively high incidence of hurricanes. In the Atlantic, Caribbean, and Gulf of Mexico, thre is the period from June through November; in the eastern Pacific June through November 15; and in the central Pacific the period from June through October.

#e. <u>Hurricane Warning Offices (HWO)</u> - selected National Weather Service (NWS) offices that have special responsibilities in the hurricane warning program. These offices are: the National Hurricane Center and the Weather Service Forecast Offices at San Juan, Puerto Rico; New Orleans, Louisiana; Washington, D.C.; Boston, Massachusetts; Eastern Pacific Hurricane Center (Redwood City, California); and Central Pacific Hurricane Center (Honolulu, Hawaii).

f. <u>Mission Identifier</u> - the nomenclature assigned to tropical and subtropical cyclone aircraft reconnaisance missions for weather data identification. It comprises an agency - aircraft indicator followed by a Chief, Aerial Reconnaissance Coordination, All Hurricanes (CARCAH) assigned mission-system indicator.

g. <u>Present Movement</u> - the best estimate of the movement of the center of a tropical cyclone at a given time and at a given position.

h. <u>Relocated</u> - a term used in an advisory to indicate that a vector drawn from the preceding advisory position to the latest known position is not necessarily a reasonable representation of the cyclone's movement.

i. <u>Subtropical Cyclones</u> - nonfrontal, low-pressure systems comprising initially baroclinic circulations developing over subtropical waters. There are two types: (1) A cold low with circulation extending to the surface layer and maximum sustained winds generally occurring at a radius of about 100 miles or more from the pressure center. These cyclones sometimes metamorphose and become tropical storms or hurricanes. (2) A mesoscale cyclone originating in or near a frontolyzing zone of horizontal wind shear, with radius of maximum sustained winds generally less than 30 miles. The entire circulation sometimes encompasses an area initially no more than 100 miles in diameter. These marine cyclones may change in structure from cold to warm core. While generally short-lived, they may ultimately evolve into major hurricanes or into extratropical wave cyclones. Subtropical cyclones are classed according to intensity as follows:

(1) <u>Subtropical Depression</u>. A subtropical cyclone in which the maximum sustained surface wind (1-minute mean) is 33 knots (38 mph) or less.

(2) <u>Subtropical Storm</u>. A subtropical cyclone in which the maximum sustained surface wind (1-minute mean) is 34 knots (39 mph) or greater.

j. <u>Tropical Cyclone Plan of the Day</u> - a coordinated mission plan that tasks operational weather reconnaissance requirements during the next 05Z to 05Z day; describes reconnaissance flights committed to satisfy both operational and research requirements; and identifies possible reconnaissance requirements for the succeeding 24-hour period.

k. Tropical Weather Systems -

(1) <u>Tropical Disturbance</u>. A discrete system of apparently organized convection-generally 100 to 300 miles in diameter-originating in the tropics or subtropics, having a nonfrontal migratory character and maintaining its

identity for 24 hours or more. It may or may not be associated with a detectable perturbation of the wind field. As such, it is the basic generic designation, which, in successive stages of intensification, may be classified as a tropical wave, depression, storm, or hurricane.

(2) <u>Tropical Wave</u>. A trough or cyclonic curvature maximum in the trade-wind easterlies. The wave may reach maximum amplitude in the lower middle troposphere or may be the reflection of an upper troposphere cold-low or equatorward extension of a middle-latitude trough.

(3) <u>Tropical Cyclone</u>. A nonfrontal low pressure system of synoptic scale developing over tropical or subtropical waters and having a definite organized circulation.

(a) <u>Tropical Depression</u>. A tropical cyclone in which the maximum sustained surface wind (1-minute mean) is 33 knots (38 mph) or less.

(b) <u>Tropical Storm</u>. A warm-core tropical cyclone in which the


maximum sustained surface wind (1-minute mean) ranges from 34 knots (39 mph) to 63 knots (73 mph) inclusive.

(c) <u>Hurricane</u>. A warm-core tropical cyclone in which the maximum sustained surface wind (1-minute mean) is 64 knots (74 mph) or more.

1. <u>Vortex Fix</u> - the location of the surface and/or flight level center of a tropical or subtropical cyclone obtained by reconnaissance aircraft penetration.

m. <u>Wall Cloud</u> - an organized band of cumuliform clouds immediately surrounding the center of a tropical cyclone. Wall cloud and eye wall are used synonymously.









RESPONSIBILITIES OF COOPERATING AGENCIES

1. Department of Commerce (DOC) Responsibilities.

a. Provide timely dissemination of all significant information regarding tropical and subtropical cyclones to appropriate agencies, general public, and marine and aviation interests.

b. Through the National Weather Service (NWS) - consult as necessary with Department of Defense (DOD) regarding day-to-day DOD requirements for cyclone assessments and attempt to meet these requirements within the capabilities of the Hurricane Warning Service; prepare through the National Hurricane Center (NHC) and distribute to DOD the coordinated DOC reconnaissance and other meteorological data requirements to be provided by DOD on tropical/subtropical cyclones and disturbances; provide facility and administration support to OL-G, Air Weather Service (AWS) as agreed to by DOC and DOD; provide DOD basic meteorological information, warnings, forecasts, and associated prognostic reasoning concerning location, intensity, and forecast movement of tropical and subtropical cyclones in the following maritime areas and adjacent states and possessions of the United States:

(1) Atlantic Ocean (north of the Equator including Caribbean Sea and Gulf of Mexico) - advices are the responsibility of the Director, NHC, Miami, FL.
 (NHC will consult with Naval Eastern Oceanography Center (NAVEASTOCEANCEN) Norfolk, VA, prior to issuance of an initial advisory.)

(2) Eastern Pacific Ocean (north of the Equator and east of $140^{\circ}W$) - advices are the responsibility of the Meteorologist-in-Charge (MIC), Eastern Pacific Hurricane Center (EPHC), Redwood City, CA. (EPHC will consult with Naval Western Oceanography Center (NAVWESTOCEANCEN), Pearl Harbor, HI, before issuance of initial and final advisories and prior to issuance of any advisory which indicates a significant change in forecast of intensity or track from last advisory.)

(3) Central Pacific Ocean (north of the Equator between 140°W and 180°) - advices are the responsibility of MIC, Central Pacific Hurricane Center (CPHC), Honolulu, HI. (CPHC will consult with NAVWESTOCEANCEN Pearl Harbor, HI, and Detachment 4, 1 Weather Wing, Hickam AFB, HI, before issuance of an initial advisory.)

(4) Relating to (1), (2), and (3) above, exchange of information is encouraged on subsequent warnings when significant changes are made, or as otherwise required.

c. Through the National Environmental Satellite Service (NESS) - operate DOC environmental satellite systems capable of providing coverage of meteorological conditions in the Tropics during the tropical cyclone season, and monitor and interpret DOC satellite imagery; obtain as necessary, National Aeronautic and Space Administration (NASA) research/development satellite data for NWS operational use; comply with NHC, EPHC, and CPHC satellite data requirements.

Through the National Data Buoy Office (NDBO) - develop, deploy, and d. operate environmental data buoy systems to support data requirements of NHC, EPHC, and CPHC.

e. Through the Environmental Research Laboratory (ERL) Research Facilities Center (RFC) - provide weather reconnaissance flights as specified in Chapter 4, unless relieved of these responsibilities by the Administrator of the National Oceanic and Atmospheric Administration (NOAA) in order to participate in project STORMFURY.

#f. Through the NWS, conduct an annual post analysis for all tropical cyclones in the Atlantic and the Pacific regions east of 180° and prepare an annual hurricane report for issuance to interested agencies.

2. DOD Responsibilities.

a. Provide NWS with timely dissemination of significant information received regarding tropical and subtropical cyclones.

b. Provide NHC, EPHC, and CPHC current DOD requirements for tropical and subtropical cyclone advices.

c. Meet DOC requirements for aircraft reconnaissance and other special observations as agreed to by DOD and DOC.

d. Provide a 24-hour aircraft operation interface (Chief, Aerial Reconnaissance Coordination, All Hurricanes -- {CARCAH}) at the National Hurricane Center.

e. Designate OL-G, AWS as the liaison to NHC and the military point of contact for NHC to request special DOD observations in support of this Plan, i.e., Defense Meteorological Satellite Program (DMSP) fixes, additional upper air observations, etc.

Provide broadcast facilities of radio station NAM for tropical storm f. and hurricane forecasts and warnings.

Provide access to Aerospace Defense Command (ADCOM) radar sites. (See g. Chapter 6.)

#h. Provide weather reconnaissance data monitor services to evaluate and disseminate reconnaissance reports.

3. Department of Transportation (DOT) Responsibilities.

Provide NWS with timely dissemination of significant information a. received regarding tropical and subtropical cyclones.

b. Through the Federal Aviation Administration (FAA) - provide air traffic control, communication, and flight assistance services. In addition, FAA will provide access to Air Route Traffic Control Center (ARTCC) communication and radar facilities (see Chapter 6) and provide communication circuits for relay of weather information as required.

c. Through the U.S. Coast Guard (USCG) - provide personnel, vessel, and communication support to NDBO for development, deployment, and operation of environmental data buoy systems; provide surface observations to NWS from its coastal facilities and vessels; provide communication circuits for relay of weather observations to NWS in selected areas; and provide coastal broadcast facilities at selected locations for tropical storm/hurricane forecasts and warnings.

4. DOD, DOC, and DOT will cooperate in arranging an annual trip to the Caribbean and the Gulf of Mexico area to carry out a continuing and effective liaison of the warning service with the Directors of Meteorological Services, Air Traffic Control Agencies, and Disaster Preparedness Agencies of nations in

those areas.









OBSERVATIONS, FORECASTS, AND RELATED INFORMATION TO BE FURNISHED BY NWS TO DOD

1. <u>Observations</u> - The National Hurricane Center (NHC), Eastern Pacific Hurricane Center (EPHC), and Central Pacific Hurricane Center (CPHC) will make available to Department of Defense (DOD) all significant tropical/subtropical cyclone observations that they receive.

2. Military Advisories.

a. <u>General</u> - NHC, EPHC, and CPHC will provide DOD with forecasts and related information for tropical and subtropical weather disturbances of depression intensity or greater. Forecasts will include advice as to location, movement, intensity, and dimension of these disturbances. Advisories will be disseminated through the NWS weather communications facility at Suitland, MD, to the Automated Weather Network (AWN) at Carswell AFB, TX, for further relay to DOD agencies. Military advisories will not be disseminated to the public. DOD forecasters who must give advice concerning an imminent operational decision may contact the appropriate Hurricane Center forecaster (see Chapter 2) when published military advisories require elaboration. Phone numbers for the NHC/EPHC/CPHC are published in Appendix D to Chapter 4.

b. <u>Military Advisory Issue Frequency</u> - The first military advisory will normally be issued when meteorological data indicate that a tropical or subtropical cyclone has formed. Subsequent advisories will be issued at 0400Z, 1000Z, 1600Z, and 2200Z, (0300Z, 0900Z, 1500Z, 2100Z in the Eastern and Central Pacific). Advisories will continue to be issued until the system degenerates below depression level. In addition, Special Advisories will be issued whenever the following criteria are met (remarks stating the reason for the special advisory or the relocation will be mandatory in all special advisories or advisories that include a relocated position):

(1) Conditions require a hurricane watch or warning to be issued.

#(2) A tropical depression becomes a tropical storm.

(3) A tropical storm changes to a hurricane or vice versa.

(4) Conditions require change or cancellation of an existing coastal warning.

(5) A tornado threat develops or the hurricane forecaster believes other significant changes have occurred.

c. <u>Military Advisory Content</u> - Military advisories will contain appropriate information as shown in Form 1 (WS Form C-13) of this chapter, Appendix A. Depending on the geographic area or circulation intensity, advisories will` contain 12- and 24-hour forecasts and when appropriate 48and 72-hour outlooks valid from times based on the latest 6-hourly synoptic time.

d. <u>Numbering of Advisories</u>. All advisories will be numbered sequentially in the Eastern and Central Pacific; i.e., Advisory Number 1 on tropical depression (TD) 1, Advisory Number 2 on TD 1, Advisory Number 3 on Tropical Storm Anita, Advisory Number 4 on Hurricane Anita, Advisory Number 5 on TD 1, etc. In the Atlantic, Caribbean, and Gulf of Mexico advisories will be numbered consecutively beginning with each new depression. When the depression is numbered as a subtropical storm or named the advisory numbering will revert to 1 and start all over again. Once the system is named in the Atlantic, that name will be retained on military advisories until no further advisories are issued on that system; advisory numbering will continue sequentially.

3. Other Information Provided to DOD.

a. Tropical Cyclone Discussion.

(1) NHC will issue a Tropical Cyclone Discussion on named Atlantic storms at 0300Z, 0900Z, 1500Z, and 2100Z. Discussion will be disseminated for intragovernmental use only and will contain preliminary prognostic positions up to 72 hours; will describe objective techniques, synoptic features, and climatology used; will provide reasons for track changes; and will include plans for warning display. Additionally, the Saffir/Simpson Hurricane Scale (SSH) as described in Appendix C to this chapter will be included whenever the tropical cyclone is within 72 hours of landfall on the U.S. coast or a military installation.

#(2) EPHC and CPHC will issue a Tropical Cyclone Discussion twice daily prior to the 0300Z and 1500Z advisories. The discussion will describe objective techniques, synoptic features and climatology used; will provide reasons for track changes; and will include plans for warning display.

b. <u>Tropical Weather Outlook</u>. Issued by NHC three times a day from 1 June to 30 November at 0530, 1130, and 1730 Eastern Local Time (ELT). The outlook will briefly describe both stable and potentially unstable areas out to 48 hours. A monthly summary of Atlantic tropical cyclone activity will be added to the Tropical Weather Outlook at the end of each month during the hurricane season.

c. <u>Public Advisories</u>. Issued by the appropriate Hurricane Warning Office (HWO) for any tropical cyclone threatening land in the Gulf of Mexico, Caribbean, or Western North Atlantic areas. In the Pacific, public advisories are issued for storms and hurricanes that are expected to affect the United States within 48 hours. Scheduled public advisories are issued at the same time scheduled military advisories are issued. When no coastal warnings are included, the 0400Z public advisory may be issued at 0230Z by NHC only. (Note: Public Advisories use statute miles for distance and miles per hour for speed.)

d. <u>Atlantic and Gulf of Mexico Tropical Cyclone Position Estimates</u>. The HWO that issues the public advisory may also issue hourly Tropical Cyclone Position Estimates when the tropical cyclone is under effective surveillance and within 200 nautical miles of land-based radar. These estimates when

issued will be prepared a short time before each hour except at hours when advisories are issued. Position estimates will be disseminated to the public, DOD, and other Federal agencies and will provide geographical positions in latitude and longitude, and also by distance and direction from a well-known point.

e. <u>Storm Summaries</u>. Storm summaries are written by the National Public Service Unit (NPSU) after subtropical and tropical cyclones have moved inland and public advisories have been discontinued. Storm summaries will continue to be numbered in sequence with public advisories on named storms. Also, these summaries will reference the former storm's name and be issued as long as the remnants of the storm remain a serious flooding threat. Storm summaries will be transmitted at 0500, 1100, 1700, and 2300 GMT. Their format and content will follow that of the Storm Summary for winter storms. See Weather Service Operations Manual, Chapter C-42.

f. <u>Marine Advisories</u>. Issued by NHC, EPHC, and CPHC with the same frequency and at the same times as the Military Advisories. The content and format of these advisories are identical to those of the Military Advisories, but will not include a 48- and 72-hour extended outlook. Marine Advisories will be transmitted to high-seas shipping according to the details found in <u>Worldwide Marine Weather Broadcasts</u>, jointly published by U.S. Navy (USN) and NWS.

4. <u>Abbreviated Communications Headings</u>. Abbreviated communications headings will be assigned to advisories on tropical and subtropical cyclones and other advices based on depression number (or storm name) and standard communication procedures. Details are found in appropriate communications manuals.

5. Designation of Tropical and Subtropical Cyclones.

a. <u>Numbering of Depressions</u>. Each depression will be assigned a number that will be retained throughout the life of the cyclone. This depression number will not, however, be disseminated on advices after a depression is named as a tropical storm/hurricane or is numbered as a subtropical storm. For each hurricane center's area, numbering will begin with 01 at the start of each calendar year. When forecast responsibility is passed from one warning center to another, the assigned number will be retained.

(1) For the Atlantic, Caribbean, and Gulf of Mexico, depression numbers will be assigned by NHC after advising the NAVEASTOCEANCEN, Norfolk.

(2) For the Pacific area east of longitude 140°W, depression numbers, (with the suffix E, i.e., 1E, 2E, 3E, etc.) will be assigned by EPHC after advising the NAVWESTEOCEANCEN, Pearl Harbor.

#(3) For the Pacific area west of longitude 140°W and east of 180°, depression numbers (with suffix C, i.e. 1C, 2C, 3C, etc.) will be assigned by CPHC after advising the NAVWESTOCEANCEN, Pearl Harbor.

#(4) For the Pacific area west of longitude 180°, depression numbers are assigned by the Joint Typhoon Warning Center (JTWC), Guam.

b. Naming of Tropical Storms and Hurricanes.


(1) <u>Atlantic and Eastern Pacific</u>. A separate set of names will be used each calendar year, beginning with the first name in the set. After the sets have been used, the same sets will be used again. Names beginning with the letters Q, U, X, Y, and Z are not included, because of the scarcity of suitable names beginning with these letters. Lists of Atlantic and Eastern Pacific names are provided in Appendix B to this chapter.

#(2) <u>Central Pacific</u>. When a tropical depression intensifies into a tropical storm or hurricane between longitude 140 W and the 180th meridian, the depression number will be discontinued and replaced by an appropriate name. The CPHC will select the name from the Central Pacific names in

Appendix B to this chapter. A separate set of names will be used each calendar year, beginning with the first name in the set. After the sets have been used, the same sets will be used again.

#(3) <u>Western Pacific</u>. For the Pacific area west of longitude 180°, Tropical Storms and Typhoons are named by the Joint Typhoon Warning Center (JTWC), Guam. The names are listed in Appendix B to this chapter for information only.

c. <u>Numbering of Subtropical Storms</u>. When a system becomes a subtropical storm, it will be assigned a storm number to indicate its sequence of occurrence among subtropical storms for that area. Numbering will begin with 1 and be consecutive, returning to 1 each new year.



CHAPTER 3 APPENDIX A FORM 1

S FORM C-13 -80) PRES. BY WSOM C-41)			NATION	RTMENT OF COMMERCE
IOTE: Gusts included wh hour forecast not i	en maximum sustained	Winds reach 50 knots. Use of Quadrants is oppressions and Subtropical Storms.	NAME AND ADDRESS OF TAXABLE PARTY.	entral Pacific. Twelve fic only.
Subtropical Depression Subtropical Storm Fropical Depression Fropical Storm Surricane	Name 'Number	Military/Marine/Aviation Advisory	Number	Corrected Special
Time	RVICECi Month Day	ty Year		

	ION, STORM, HURRICANE CENTER LOCATED/RELOCATED NORTH WEST AT EXCELLENT (Within 10NM) BASED ON AF RECONNAISSANCE TIME OF FIX Z. GOOD (Within 20NM) NOAA RECONNAISSANCE TIME OF FIX Z. FAIR (Within 40NM) LAND BASED RADAR SATELLITE SYNOPTIC REPOR ACCURATE WITHIN NM ACFT RADAR SHIP REPORT EXTRAPOLATION
Remarks	
NOTE	: Leave 3 spaces after each latitude and longitude entry.
1	

DIAMETER OF EYE NM ()	IT KNOWN)				
MAXIMUM SUSTAINED WINDS	KT WITH	I GUSTS TO			
*RADIUS OF 100 KT WINDS	NE	SE	SW		
RADIUS OF 64 KT WINDS	NE	SE	SW	NW.	
RADIUS OF 50 KT WINDS	NE	SE	SW	NW.	
RADIUS OF 34 KT WINDS	NE	SE	SW	NW.	
RADIUS OF SEAS 15 FT OR HIGHER	NE	SE	SW	NW.	
REPEAT CENTER LOCATED/RELOCATED N	IEARN		WAT		
FORECAST VALID	Z		N	_w.	
MAXIMUM SUSTAINED WINDS					
RADIUS OF 50 KT WINDS					
RADIUS OF 34 KT WINDS	NE	SE	SW	NW.	
FORECAST VALID	Z		N	. W .	
MAXIMUM SUSTAINED WINDS	KT WITH	H GUSTS TO_			
RADIUS OF 50 KT WINDS	NE	SE	SW	NW.	
RADIUS OF 34 KT WINDS	NE	SE	SW	NW.	
STORM-TIDE OF					
HEAVY PRECIPITATION					
HEAVY PRECIPITATION REQUEST FOR 3-HOURLY SHIP REPORTS					
REQUEST FOR 3-HOURLY SHIP REPORTS	BTROPICAL STORM A	ND MARINE A	DVISORIES E	ND HERE	
REQUEST FOR 3-HOURLY SHIP REPORTS		ND MARINE A	DVISORIES E	ND HERE	
REQUEST FOR 3-HOURLY SHIP REPORTS DEPRESSION, SU EXTENDED OUTLOOK FOR INTRAGOVERNM	AENTAL USE ONLY				
REQUEST FOR 3-HOURLY SHIP REPORTS DEPRESSION, SU EXTENDED OUTLOOK FOR INTRAGOVERNM OUTLOOK VALID	ENTAL USE ONLY		N	_₩.	
REQUEST FOR 3-HOURLY SHIP REPORTS DEPRESSION, SU EXTENDED OUTLOOK FOR INTRAGOVERNM OUTLOOK VALID MAXIMUM SUSTAINED WINDS	ZKT WITH	GUSTS TO	N	₩.	
REQUEST FOR 3-HOURLY SHIP REPORTS DEPRESSION, SU EXTENDED OUTLOOK FOR INTRAGOVERNM OUTLOOK VALID	ENTAL USE ONLY	GUSTS TOSE	N	W.	
REQUEST FOR 3-HOURLY SHIP REPORTS DEPRESSION, SU EXTENDED OUTLOOK FOR INTRAGOVERNM OUTLOOK VALID MAXIMUM SUSTAINED WINDS RADIUS OF 50 KT WINDS OUTLOOK VALID	XENTAL USE ONLY Z KT WITH NE Z	GUSTS TOSE	N	WNWW.	
REQUEST FOR 3-HOURLY SHIP REPORTS DEPRESSION, SU EXTENDED OUTLOOK FOR INTRAGOVERNM OUTLOOK VALID MAXIMUM SUSTAINED WINDS	XENTAL USE ONLY Z KT WITH NE Z KT WITH	GUSTS TO GUSTS TO	N	W. NW. W.	
REQUEST FOR 3-HOURLY SHIP REPORTS DEPRESSION, SU EXTENDED OUTLOOK FOR INTRAGOVERNM OUTLOOK VALID MAXIMUM SUSTAINED WINDS OUTLOOK VALID MAXIMUM SUSTAINED WINDS	AENTAL USE ONLY Z KT WITH NE KT WITH NE	GUSTS TO GUSTS TO	N	W. NW. W.	

CHAPTER 3 APPENDIX B PAGE 1

> CLAUDETTE NICHOLAS VICTOR FABIAN ISABEL ODETTE TERESA GLORIA KATE LARRY MINDY HENRI PETER DANNY ELENA WANDA ROSE JUAN 1985 BOB ANA

Conference.) Je

ድ

*

ANTIC HURRICANE NAMES	
1983	1984
ALICIA	ARTHUR
BARRY	BERTHA
CHANTAL	CESAR
DEAN	DIANA
ERIN	EDOUARD
FELIX	FRAN
GABRIELLE	GUSTAV
HUGO	HORTENSE
IRIS	ISIDORE
JERRY	JOSEPHINE
KAREN	KLAUS
LUIS	LILI
MARILYN	MARCO
NOEL	NANA
OPAL	OMAR
PABLO	PALOMA
ROXANNE	RENE
SEBASTIEN	SALLY
TANYA	TEDDY
VAN	VICKY
WENDY	WILFRED
Region IV subsequent to	the Hurrica

F	1982	ALBERTO	BERYL	CHRIS	DEBBY	ERNESTO	FLORENCE	GILBERT	HELENE	ISAAC	JOAN	KEITH	LESLIE	MICHAEL	NADINE	OSCAR	PATTY	RAFAEL	SANDY	TONY	VALERIE	WILLLIAM	es approved by
	1981	ARLENE	BRET	CINDY	DENNIS	EMILY	FLOYD	GERT	HARVEY	IRENE	JOSE	KATRINA	LENNY	MARIA	NATE	OPHELIA	PHILIPPE	RITA	STAN	TAMMY	VINCE	WILMA	This list of names
					[+]																[*]		E

AT

1980	ALLEN	BONNIE	CHARLEY	DANIELLE	EARL	FRANCES	GEORGES	HERMINE	IVAN	JEANNE	KARL	LISA	MITCH	NICOLE	OTTO	PAULA	RICHARD	SHARY	TOMAS	VIRGINIE	WALTER	LON)	
										14													

1985

GUILLERMO PAULINE ENRIQUE IGNACIO DOLORES VIVIAN SANDRA BLANCA CARLOS JIMENA ANDRES WALDO TERRY KEVIN HILDA MARTY LINDA RICK NORA OLAF FEFA

CHAPTER 3 APPENDIX B PAGE 2

ane Conference.)

NAMES	1984	ALMA	BORIS	CRISTINA	DOUGLAS	ELIDA	FAUSTO	GENEVIEVE	HERNAN	ISELLE	JULIO	KENNA	LOWELL	MARIE	NORBERT	ODILE	POLO	RACHEL	NOMIS	TRUDY	VANCE	WALLIS	to the Hurrica	
PACIFIC HURRICANE NAI	1983	ADOLPH	BARBARA	COSME	DALILIA	ERICK	FLOSSIE	GIL	HENRIETTE	ISMAEL	JULIETTE	KIKO	LORENA	MANUEL	NARDA	OCTAVE	PRISCILLA	RAYMOND	SONIA	TICO	VELMA	MINNIE	IV subsequent	
EASTERN PACIF.	1982	ALETTA	BUD	CARLOTTA	DANIEL	EMILIA	FABIO	GILMA	HECTOR	IVA	NHOL	KRISTY	LANE	MIRIAM	NORMAN	OLIVIA	PAUL	ROSA	SERGIO	TARA	VICENTE	WILLA	annroved by Region	52
	1981	ADRIAN	BEATRIZ	CALVIN	DORA	EUGENE	FERNANDA	GREG	HILARY	IRWIN	JOVA	KNUT	LIDIA	MAX	NORMA	OTIS	PILAR	RAMON	SELMA	TODD	VERONICA	WILEY	This list of names	
								ΓE														A	0TF.	

ON) MADELINE WINIFRED GEORGETT SEYMOUR ESTELLE VIRGIL LESTER JAVIER ROSLYN HOWARD ORLENE NEWTON AGATHA PAINE FRANK CELIA DARBY TINA SISI BLAS 1980 KAY

CHAPTER 3 APPENDIX B # PAGE 3

1984

WAILANI

WILIAMA

WALAKA

The pronounced vowels. triple is AKONI or including double (Example, 00. I <u>All</u> letters in the Hawaiian language are pronounced n and nē.) 0 I 13: 0 U e, 00 1 1 •H <mark>ы</mark> UTLANT U 1a. g: ี เ poo ä mā sounds is: 1 PUAMELE vowel ..

•

*

IC HURRICANE NAMES

1982

AUKAI EKEKELA HAKUOLE ILIMA ILIMA KEKAPA KEKAPA KEKAPA KEKAPA LEILANI MALEKO MALEKO NANI OLOHANI PAMILA VLUKOA WEHILANI

1983

ANUHEA EL IA EL IA HOKULANI IOANE KANANI KANANI KANANI KANANI KANANI MOANA MOANA NAMAKA NAMAKA

CENTRAL PACIFIC

1981

ANA EKEWAKA HALIAKA KOLIKA KOLIKA LUI NIALA NIALA VILANI UILANI

1980	AKONI	EME	HALOLA	IUNE	KIKA	LUKE	MALULANI	NAPUA	OLIWA	PUAMELE	ULEKI	WILA		NOTE: A	key to v	ä kō nē;		

CHAPTER 3 APPENDIX B PAGE 4

VERNON

WYNNE

THELMA

SPERRY

= OLUMN

ILLL LARA OYLE ABIAN ELSON GNES KIP ESS AL

	COLUMN	AGNES	BILL	CLARA	DOYLE	ELSIE	FABIAN	GAY	HAZEN	IRMA	JEFF	KIT	LEE	MAMIE	NELSON	ODESSA	PAT	RUBY	SKIP	TESS	VAL	MINONA	
FIC TYPHOON NAMES	COLUMN 3	ALEX	BETTY	CARY	DINAH	ED	FREDA	GERALD	HOLLY	IKE	JUNE	KELLY	LYNN	MAURY	NINA	OGDEN	PHYLLIS	ROY	SUSAN	THAD	VANESSA	WARREN	

N COLUMN

1

ABBY

BEN

CARMEN

DOM

ELLEN

FORREST

GEORGIA

HERBERT

IDA

NORRIS

MARGE

ORCHID

PERCY

RUTH

JOE KIM LEX

COLUMN	ANDY	BESS	CECIL	DOT	ELLIS	FAYE	GORDON	HOPE	IRVING	JUDY	KEN	LOLA	MAC	NANCY	OWEN	PAMELA	ROGER	SARAH	TIP	VERA	WAYNE	
										17												

complete anemometer 01 down damage failure failure trees material and curtainwall complete standard and residences Shrubs roofing Some damage, g Extensive r small destruction of mobile homes. door 131-155 many window and (F-scale uo SUNIM . nwob extensive windor roof structures elevations signs (a) all or

above yards the lying above the hours story miles areas near of feet LOW feet 500 single 3-5 beach 9 miles as structures within 10 water . 18 action of of far than to 2 and erosion ut by rising Major erosio residences 90 13 lower within ing of required (nominally inland and batter floors continuously ground all cut flooded be lower arrives. STORM SURGE evacuation of e may low be Terrain shoreline uo may center residences Major dama shore due level shoreline. (q) normal). Massive the escape before sea of

glass signs many Shrubs complete damane Id but door standard uo all Extensive small and structures greater) and considerable failures, away at window udm buildings or or roof 3.0 extensive building over or damage greater than homes, (F-scale of blown Industrial roofing failure and complete destruction of mobile and elevations severe SONIM Complete , uwob overturned and some Very residences trees failures, (a) mometer down. ings age. and

than sea of of Low-lying residenbe. floors 63 hours above mil greater of 10 lower 3-5 feet shoreline. 5 evacuations nominally cut by rising water within to 15 STORM SURGE (height nomi ve normal). Major damage ures located less than low ground the Massive required. 500 yards of located uo above normal) routes inland center arrives. be situated shoreline may structures] l and within areas and (q) feet escape level fore tial all the 18

and that ng ish Tp buil Fujtta establ one nomina to (from wind period wind

of Intensity," Characterization No Paper Research and Area

CHAPTER 3 APPENDIX C

SCALE (HSS) HURRICANE

FOUR

FIVE

- sustained time uo sustained forces minimum dynamic the ർ 1972) of persists for Definition structure optimal Simpson 18
- "Proposed Hurricanes by Chicago (SMRP) 1971: r of Tornadoes a University Fujita, 91. H 車車

and nor wn.

and door wm, anemometer homes. -JO structures smaller -JO er Evacuati island are e n inl cent op damage CL op W P anemome doors; residences shrubbery above / 4-5 feet above inundated, minor above within Small and anchorages ees, large trees blown constructed signs blown val of c blown signs. mobile homes destroyed. many window Considerable 6-8 feet escape rou and arrival Terrain continuously Evacuation of low-lying residences locks of the shoreline may be required feet inland rising water standard Larger standard of floating debris. cut by rising water 2-4 hours before arriva Considerable pier damage, marinas flooded. in unprotected anchorages break moorings. of some shoreline residences and low-lying may be flooded intar low-lying residences trees coast with poorly current some some for some for an and some for some for some for small rest. constructed to windows, exposed exposed be flooded or (nominally 6d low-lying es
hours before Damage 111-130 mph at st ale 2.0-2.4) Damage off trees, large some ORM SURGE (nominally ring coastal roads i small craft in expos to roofing material, wind damage to building structure or destroyed. (nominally at damage, some structural damage utility buildings, and mobile l amount of curtainwall failures, WINDS 96-110 mph a (F-scale 1.5-1.9). and tree foliage, to WINDS* 75-95 mph (F-scale 1.0-1.4). trees, foliage, and at material poorly constructed signs, or to poorly damage flooding 96-110 and STORM SURGE Low-lying coast coast material STORM SURGE battering tes inland above sea level center arrives. roads (F-scale to structural damage Foliage SUNIM near SUNIM Serious shrubbery, tree. damaged by bat escape routes before center a and Coastal some roofing trees. For Practically blocks tions elevations THREE elevations structures Extensive damage, s moorings. shrubbery required. ONE DML (p) (a) (q) (a) (a) (q) damage major d feet Major elevat more. ٠ ٠ some mal) mal) mal) No 5 18

pier break Low-lying 3-5 hours / lower the 75-95 mph at standard anemometer Le 1.0-1.4). **Damage primarily to foliage, and unanchored mobile homes. building structures. Some damage to ter Some to . uwop ion no and aft eas than

SAFFIR/SIMPSON

AIRCRAFT RECONNAISSANCE

#1. General. All Department of Commerce (DOC) tropical and subtropical cyclone aircraft reconnaissance needs will be requested and provided in accordance with the procedures of this chapter. Department of Defense (DOD) will attempt to fulfill all DOC requirements; however, based on stated DOC needs, DOD will normally be prepared to generate up to five reconnaissance aircraft sorties per day. Requirements exceeding this capability will be executed on a "resource permitting" basis. Research aircraft of the Research Facilities Center (RFC) may be diverted to fulfill urgent operational requirements. In times of national emergency or war, some or all DOD

reconnaissance resources may not be available to fulfill DOC needs.

2. Responsibilities.

a. DOD has operational reconnaissance responsibility for providing vortex fixes/data and investigative flights in response to DOC needs.

b. DOC/NOAA/RFC may be requested to:

(1) Provide augmentation to the U.S. Air Force (USAF) for operational aircraft reconnaissance with high-density/accuracy data, when storms are within 24 hours of landfall of the continental United States.

(2) Provide augmentation capabilities for USAF aircraft reconnaissance when DOC needs exceed the capabilities of DOD resources.

(3) Assume responsibility for hurricane reconnaissance over foreign airspace that may be restricted for military operations.

c. Additionally, RFC may conduct research flights which assume an operational responsibility to the hurricane centers.

<u>Control of Aircraft</u>. Operational control of aircraft engaged in tropical 3. subtropical cyclone reconnaissance will be exercised by the operating or agencies.

4. Joint Reconnaissance Requirements.

a. Meteorological Parameter Requirements. Data needs in priority order are:

(1) Geographical position of vortex center (surface center if known).

(2) Central sea-level pressure (by dropsonde or extrapolation from within 1,500 feet of sea surface).

19

Minimum 700-millibar height (if available). (3)

Wind profile data (surface and flight level). (4)

Temperature (flight level). (5)

- (6) Sea-surface temperature.
- (7) Dewpoint temperature (flight level).
- (8) Height of eye wall.

b. <u>Meteorological Instrument Capabilities</u>. Required aircraft reconnaissance data instrument capabilities are as follows:

- (1) Data positions within 10 nautical miles.
- (2) Sea-level pressures plus or minus 2 millibars.

(3) Pressure heights - plus or minus 10 meters.

#(4) Temperatures (including dewpoint and sea-surface temperature {SST}) plus or minus 1.0 °C.

#(5) Winds - velocity: 4 knots or 5% of wind vector, whichever is greater; direction: plus or minus 10°.

c. <u>Standard Flight Patterns</u>. Operational hurricane reconnaissance flights will fly designated flight patterns (Appendix A of this chapter) that use a quadrant system based upon the predicted direction of motion of the cyclone center. (See following diagram.) A tasked pattern may be adjusted by the flight meteorologist to best fulfill data requirements within operational capabilities of the aircraft or agency concerned.



LEFT	FRONT	RIGHT	FRONT
LEFT	REAR	RIGHT	REAR

d. <u>High-Density Accuracy Requirements</u>. DOC requires rapid acquisition of high-density/accuracy data. Only a limited number of aircraft now have the capability to meet these requirements. DOC requests for aircraft reconnaissance should include the requirements for these resources to be committed to a particular system(s).

e. <u>High Level Profile Data Requirements</u>. At times, the National Hurricane Center (NHC) will request mid-tropospheric reconnaissance data on the periphery of systems approaching the United States. The NHC will provide a specific track profile to include control point and control time to CARCAH for coordination with the reconnaissance units.

5. Reconnaissance Planning and Flight Notification.

a. DOC Requests for Aircraft Reconnaissance Data.

(1) NHC will coordinate with Eastern Pacific Hurricane Center (EPHC) and Central Pacific Hurricane Center (CPHC) to determine a list of the total DOC requirements for data on tropical and subtropical cyclones or disturbances for the next 24-hour period (0500Z - 0500Z) and an outlook for the succeeding 24-hour period. This coordinated request will be provided to CARCAH as soon as possible, but not later than (NLT) 1630Z each day (in the format of Form 1, Appendix B). Amendments will be provided as required.

> From this coordinated DOC request, CARCAH will publish the (2)

Tropical Cyclone Plan of the Day (TCPOD). When DOC needs exceed DOD and RFC resources, CARCAH will coordinate with NHC to establish priorities of accomplishment.

(3) The following requests can be anticipated for a forecast or actual storm location:

#(a) Atlantic, Gulf of Mexico, and Caribbean - up to four 6-hourly fixes per day when a storm is within 500 nautical miles of landfall west of 55 W and north of 8 N, and up to eight 3-hourly fixes per day when a storm is forecast to be within 300 nautical miles of the U.S. coast, Puerto Rico, Virgin Islands, DOD installations, and other DOD assets when specified.

#(b) Eastern and Central Pacific - up to two consecutive 6-hourly fixes per day when a storm is within 300 nautical miles of landfall, DOD installations and other DOD assets when specified.

(c) Investigative flights may be requested as required for disturbances in areas defined in paragraphs (a) and (b) above (i.e., one or two flights per day dependent upon proximity of landfall and upon known or suspected stage of development).

(d) Exceptions may be made when additional reconnaissance is essential to carry out warning responsibilities.

b. DOD Aircraft Reconnaissance Responsiveness.

(1) Notification of requirements must occur at least 16 hours plus en route time to the area of concern.

(2) The "Succeeding Day Outlook" portion of the TCPOD provides advance notification of requirements and authorizes units to preposition aircraft. For missions requiring prepositioning, the "Succeeding Day Outlook" may not provide adequate advance notification. In these situations an "Additional Day Outlook" may be included in the TCPOD to authorize units to preposition aircraft.

When circumstances do not allow the appropriate notification lead (3)time, the requirement will be levied as "resources permitting."

(4) At times a storm may develop unexpectedly and cause a serious threat to lives and property within a shorter time frame than provided for in the paragraphs above. These causes will be dealt with through emergency procedures not included in this plan.

c. Reconnaissance Tropical Cyclone Plan of the Day (TCPOD).

#(1) <u>Preparation</u>. CARCAH will prepare the TCPOD (Appendix B, Form 2) daily during the period from 1 June through 30 November and at other times during the year as required. CARCAH will coordinate the TCPOD with NHC, 920th WRG, 53rd WRS, and RFC before publication.

(a) TCPOD will list all DOC-required tropical/subtropical recon-

naissance operational missions. The Remarks section of the TCPOD will include appropriate comments whenever research and operational flights overlap.

(b) DOD-required tropical or subtropical cyclone reconnaissance missions in the Atlantic or the Pacific west to 180° will also be listed in the TCPOD and identified as Navy or USAF requirements.

(c) Amendments to the TCPOD will be prepared only when requirements change.

(2) <u>Dissemination</u>. The TCPOD will be made available to all appropriate agencies that provide support to or exercise control of reconnaissance missions or that are a part of the hurricane warning service. The TCPOD will be disseminated by 1800Z each day. Amendments will be disseminated as required.

d. Air Traffic Control (ATC) Clearances.

(1) ATC clearances, unless otherwise coordinated before the flight with the responsible ATC facility, will provide ATC separation between all aircraft operating on storm missions and between these aircraft and other nonparticipating aircraft operating within controlled airspace. Mission commanders should be aware that nonparticipating aircraft may be operating over and nearby the storm area; thus, adherence to ATC clearances is mandatory for safety purposes.

(2) ATC will increase the vertical separation between aircraft when reports from pilots indicate their inability to maintain assigned altitudes because of turbulence. Pilots should be aware, however, that unless such reports are received, only normal vertical separation of 1,000 feet below FL290 and 2,000 feet above FL290 will be provided by ATC to aircraft operating in the storm area. Thus, the fact that storm-mission aircraft have filed flight plans and are operating 5,000 or 10,000 feet apart does not imply that the altitudes (flight levels) in between may not be in use by nonstorm aircraft.

(3) Any procedures, desired by storm-mission commanders concerning ATC separation outside the above parameters, must be specifically coordinated with the ATC center(s) of concern.

#(4) Dropsonde Releases. Dropsonde releases will be coordinated with the appropriate Air Route Traffic Control Center (ARTCC) and participating aircraft if within controlled airspace, and with participating aircraft only, if outside controlled airspace. Contact between participating aircraft will be made using the frequencies listed in Chapter 4, Appendix C, paragraph 3.

6. Reconnaissance Effectiveness Criteria.

a. General. Specified reconnaissance times are established to allow sufficient time for the forecaster to analyze the data before issuing an advisory. Every effort should be made to obtain data at scheduled times. The following criteria will be used to assess reconnaissance effectiveness:

(1) ON-TIME - Fix is made not earlier than 1 hour before nor later than 1/2 hour after scheduled fix time. Investigative aircraft are within 250 nautical miles of the specified coordinates by the scheduled time.

(2) EARLY - Fix is made from 1 hour before scheduled fix time to half of the time interval to the preceding scheduled fix (not to exceed 3 hours).

(3) LATE - Fix is made within the interval from 1/2 hour after scheduled fix time (not to exceed 3 hours). Investigative aircraft are within 250 nautical miles of specified coordinates no later than 2 hours after scheduled time.

(4) MISSED - Data are not obtained within the parameters specified for on-time, early, or late.

#(5) EXCEPTIONS - Appropriate credit will be given when the aircraft arrives in the requested area but is unable to locate a center due to storm dissipation or rapid movement.

b. NHC, CPHC, or EPHC will provide CARCAH a written assessment of the reconnaissance mission anytime its timeliness or quality is outstanding or substandard (see Appendix B, Form 5). Requirements levied as "resources permitting" will not be assessed.

7. Aerial Reconnaissance Weather Encoding and Reporting.

a. Horizontal and Vertical. Horizontal meteorological observations and vertical observations will be coded and transmitted in RECCO code and TEMP DROP Code, respectively. En-route RECCO observations will be taken and transmitted at least hourly until the aircraft is within 200 nautical miles of the center of the storm at which time observation frequency will become at least every 30 minutes.

b. <u>Vortex Data</u>. The detailed Vortex Data Message (Form 3, Appendix B) will be prepared with all observed vortex fix information for all scheduled fixes. For intermediate fixes, either an abbreviated or detailed Vortex Data Message may be transmitted, depending upon availability of information and forecaster requirements.

c. <u>Center Fix Data</u>. All radar fix reports and other type aircraft center fixes will be made in plain text and appended to the RECCO observation also taken at fix time. Remarks stating the degree of confidence should be included for radar fixes in the same manner as in Chapter 6, paragraph 2.b.

d. <u>Supplementary Vortex Data</u>. Penetration and collection of supplementary vortex data on operational flight patterns A and B will normally start at 700 millibars at a radius of 80 nautical miles from the center as determined by the flight meteorologist. The supplementary vortex data required are as shown in Appendix B, Form 4. Note: Present weather reconnaissance equipment is marginal in satisfying these requirements; data will be collected as close to stated requirements as possible and within the capabilities of the flight crew.

e. <u>Postflight Debriefing</u>. At the forecaster's request, the flight meteorologist will provide either an airborne or postflight debriefing to the appropriate hurricane center.

f. <u>Mission Identifier</u>. Each reconnaissance report will include the mission identifier as the opening text of the message. Regular weather and hurricane reconnaissance messages will include the 5-digit agency/aircraft indicator followed by the CARCAH-assigned mission-system indicator. Elements of the mission identifier are:

Agency - Aircraft Indicator -- Mission System Indicator

Agency - Aircraft Number	# of missions	Depression #	Storm name
	this system	or XX if not	or words
AF plus last 3 digits of	(2 digits)	a depression	CYCLONE or
tail number		or greater	INVEST
		(2 digits)	

NOAA plus last digit of regular number

EXAMPLES:

AF985	01XX	INVEST	(Air Force aircraft 985 on the first mission to investigate a suspect area.)
AF987	0503	CYCLONE	(Air Force aircraft 987 on the fifth mission on depression #3. Invest or fix as specified in TCPOD.)

NOAA2 0701 AGNES (NOAA aircraft 42RF on the seventh mission to fix depression #1, which has acquired the name AGNES.)



the same and the second of the

CHAPTER 4

g. Observation Numbering and Content.

(1) The first weather observation will have appended as remarks the ICAO four-letter departure station identifier, time of departure, and estimated time of arrival (ETA) at the coordinates or storm.

EXAMPLE:

AF966 0308 EMMY OB 01 97779 TEXT TEXT...DPTD KBIX AT 10/2100Z ETA 31.5N 75.0W AT 11/0015Z

(2) All observations (RECCO, Vortex, Supplemental, and Dropsonde) from the first to the last will be numbered sequentially. When an aircraft is

diverted from standard reconnaissance to fulfill NHC requirements, the next observation from the diverted aircraft will be labeled OB 01, will use the CARCAH assigned mission identifier, and will include time of diversion and ETA to coodinates of interest. If diverted from an NHC mission to fulfill new NHC requirements or if the aircraft is programmed to satisfy separate NHC system requirements, the same rule applies except that last report remarks will be added to the terminated mission.

EXAMPLE:

AF968 01XX INVEST OB 01 97779 TEXT TEXT...DPTD FOXTROT TRACK AT 05/1438Z ETA 18N 85W AT 05/1630Z

(3) If a CARCAH assigned mission identifier is changed inflight as a result of system intensity changes, observation numbers will continue sequentially and appropriate remarks made.

EXAMPLE:

AF987 0308 EMMY OB 06 97779 TEXT TEXT...OBS 01 THRU 05 XMTD AS AF987 0308 CYCLONE

(4) Appended to the final weather observation will be a last report remark, which will include destination, ETA, number of observations, and monitor(s) that copied the observations.

EXAMPLE:

AF553 0308 EMMY OB 16 XXAA TEXT TEXT...LAST REPORT ETA KBIX 11/0910Z OBS 01 THRU 10 and 12 THRU 16 KMIA OB 11 KMHR







WEATHER INSTRUMENTED USAF C-130 AIRCRAFT FLOWN FOR HURRICANE RECONNAISSANCE




CHAPTER 4 APPENDIX A ATTACHMENT 1

OPERATIONAL FLIGHT PATTERN "A"

Provides vortex and peripheral data on tropical and subtropical cyclones including two 6-hourly and intermediate fixes.

DATA REQUIREMENTS



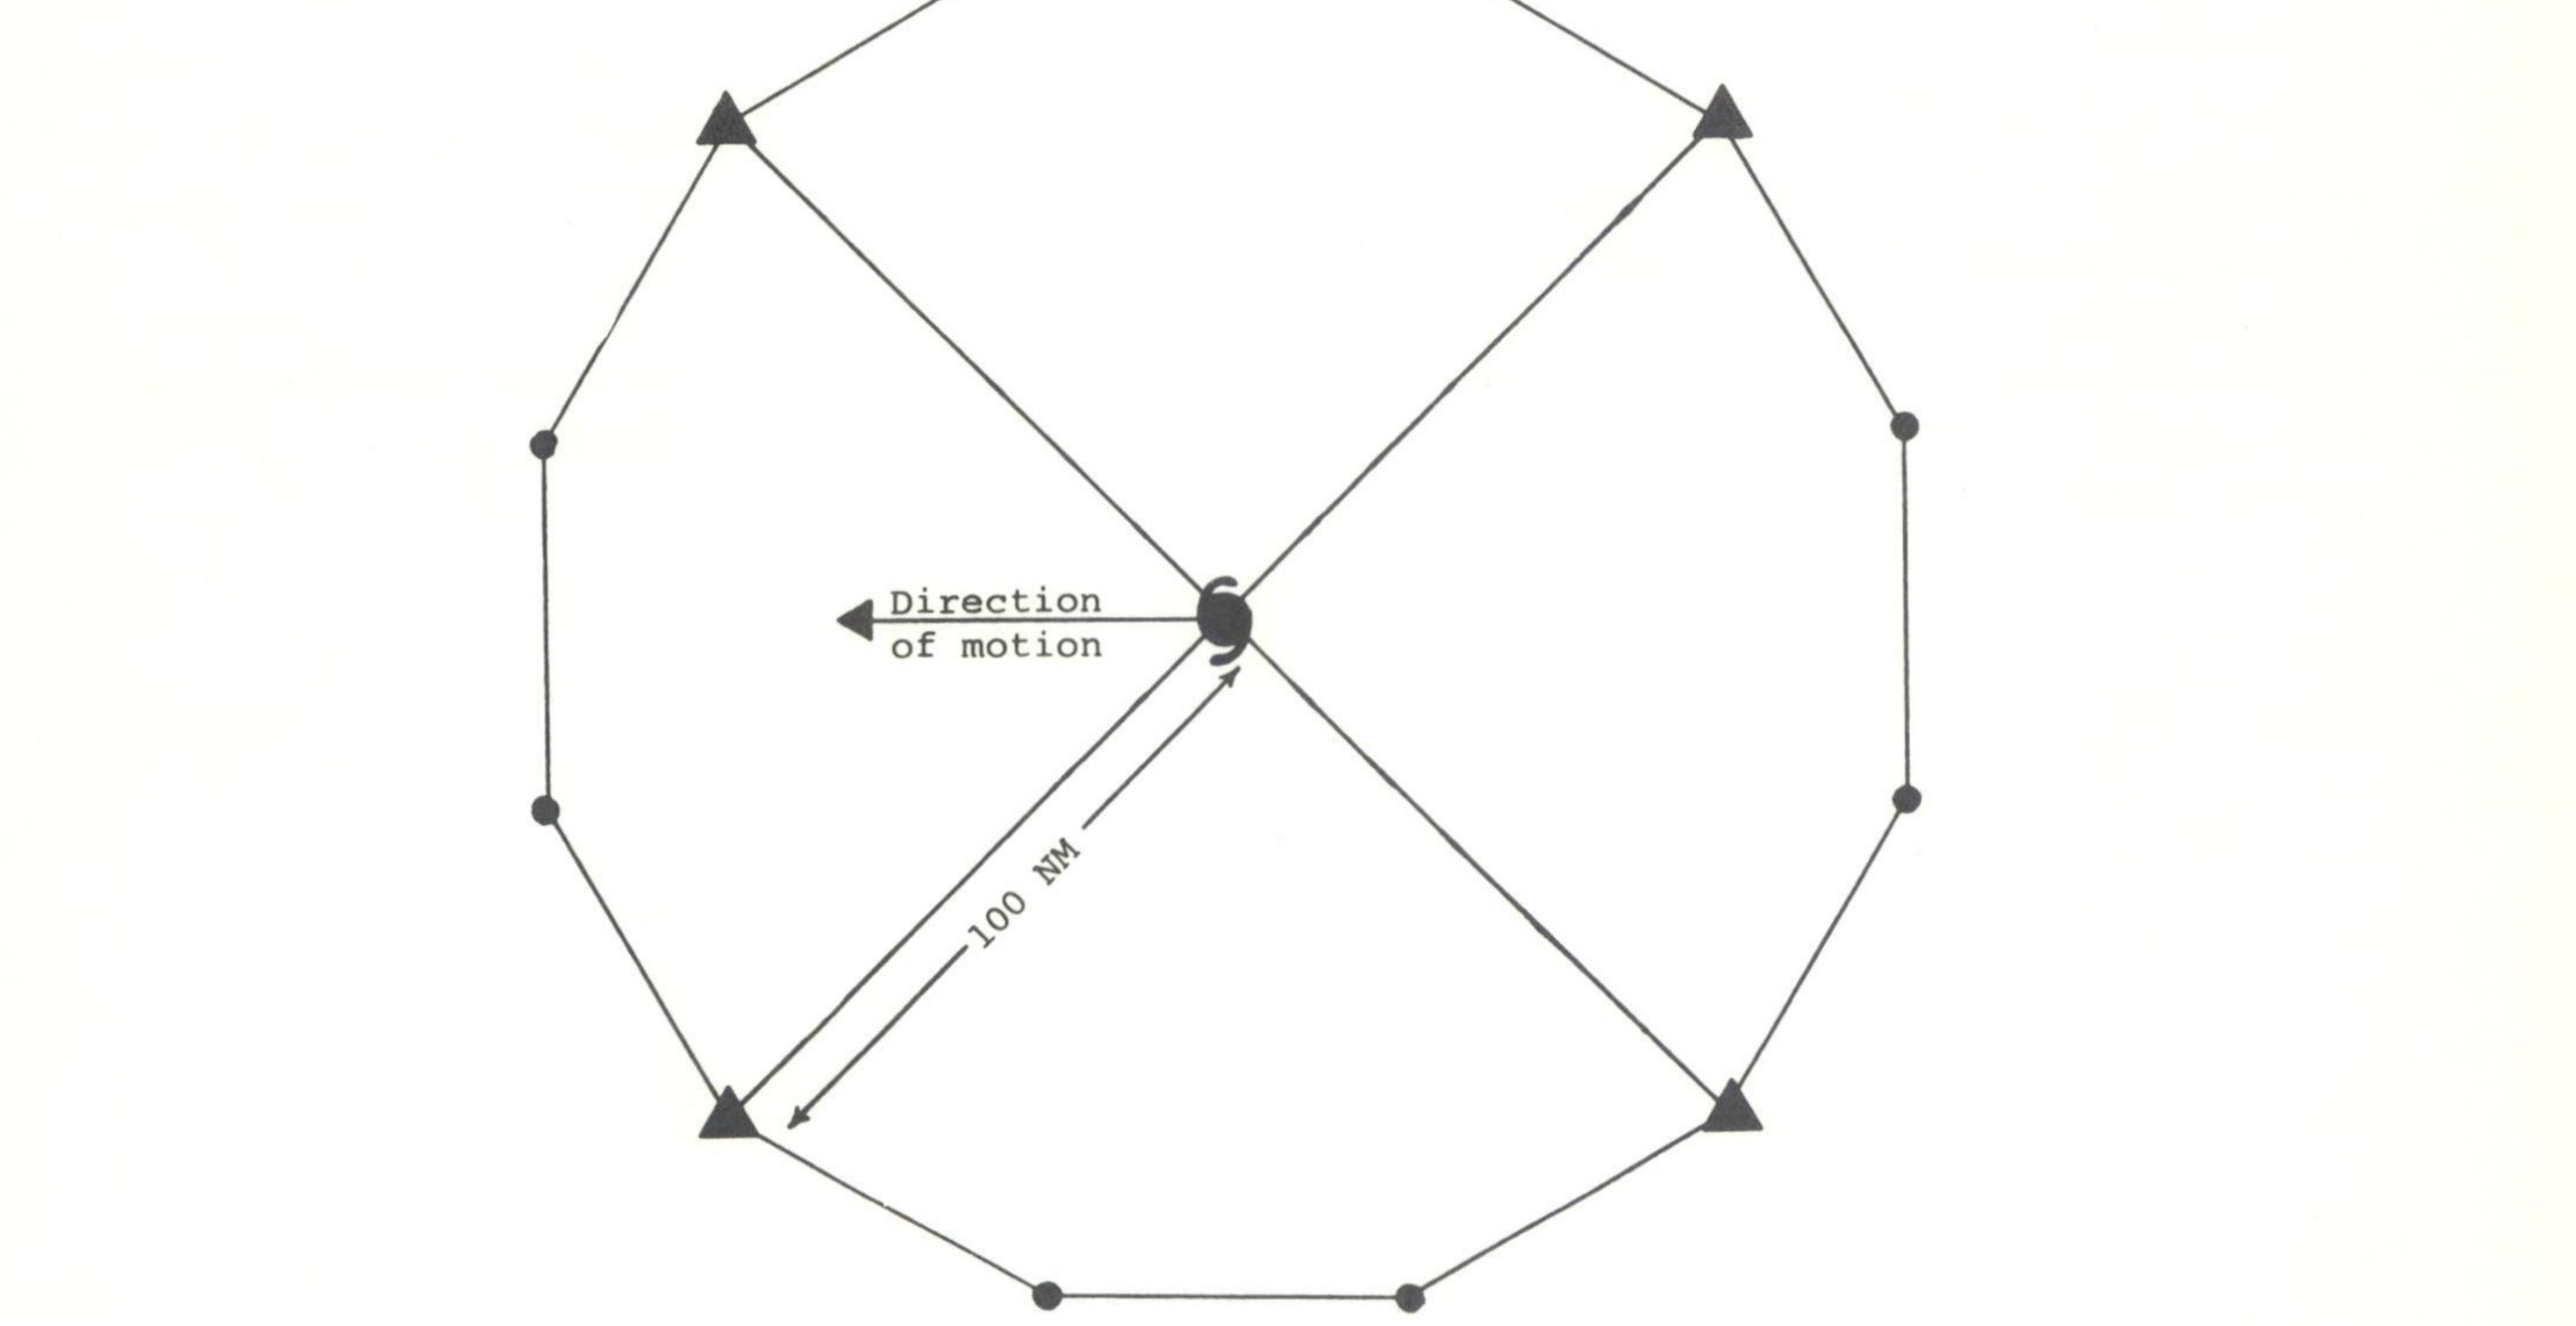

OBSERVATION DETAILS

1. Flight level - normally 700 millibars, but may be low level if requested.

2. RECCO (Section 1 plus 4ddff and 9ViTwTwTw is required for each transit of a triangle position. Transmit immediately. RECCO (Section 3 plus 9ViTwTwTw) is required for each transit of a circle position. Section 3 data are appended to next RECCO (Section 1) observation. Groups with indicator 4 or 9 are included in observations only when surface winds are discernable or flight is at low level.

#3. Supplementary Vortex data are required for each radial flown inbound or outbound. Message is normally prepared and transmitted after completion of all radial legs.

CHAPTER 4 APPENDIX A ATTACHMENT 1 (Continued)

4. On each transit of the center a fix will be made and a Vortex Data Message completed. If it is a scheduled fix, the Detailed Vortex Data Message will be completed using data gathered since the previous fix and will be transmitted immediately. If it is an intermediate (nonscheduled) fix, an Abbreviated Vortex Data Message using data gathered since the previous fix may be prepared in lieu of the detailed message and transmitted immediately. Center dropsonde data will also be provided for scheduled fixes made at 700 millibars or above.


5. Dropsonde data are required in each quadrant at triangle positions once per mission.

6. Entry and exit headings are 45° off cyclone direction of motion as specified or its reciprocal [(dd <u>+</u> 45) or (dd + 180 <u>+</u> 45)]. These radial headings should be maintained within 20° .

7. Current weather reconnaissance capability may preclude complete and timely satisfaction of these requirements; peripheral dropsonde soundings will be attempted whenever deemed feasible by the flight meteorologist.




CHAPTER 4 APPENDIX A ATTACHMENT 1A

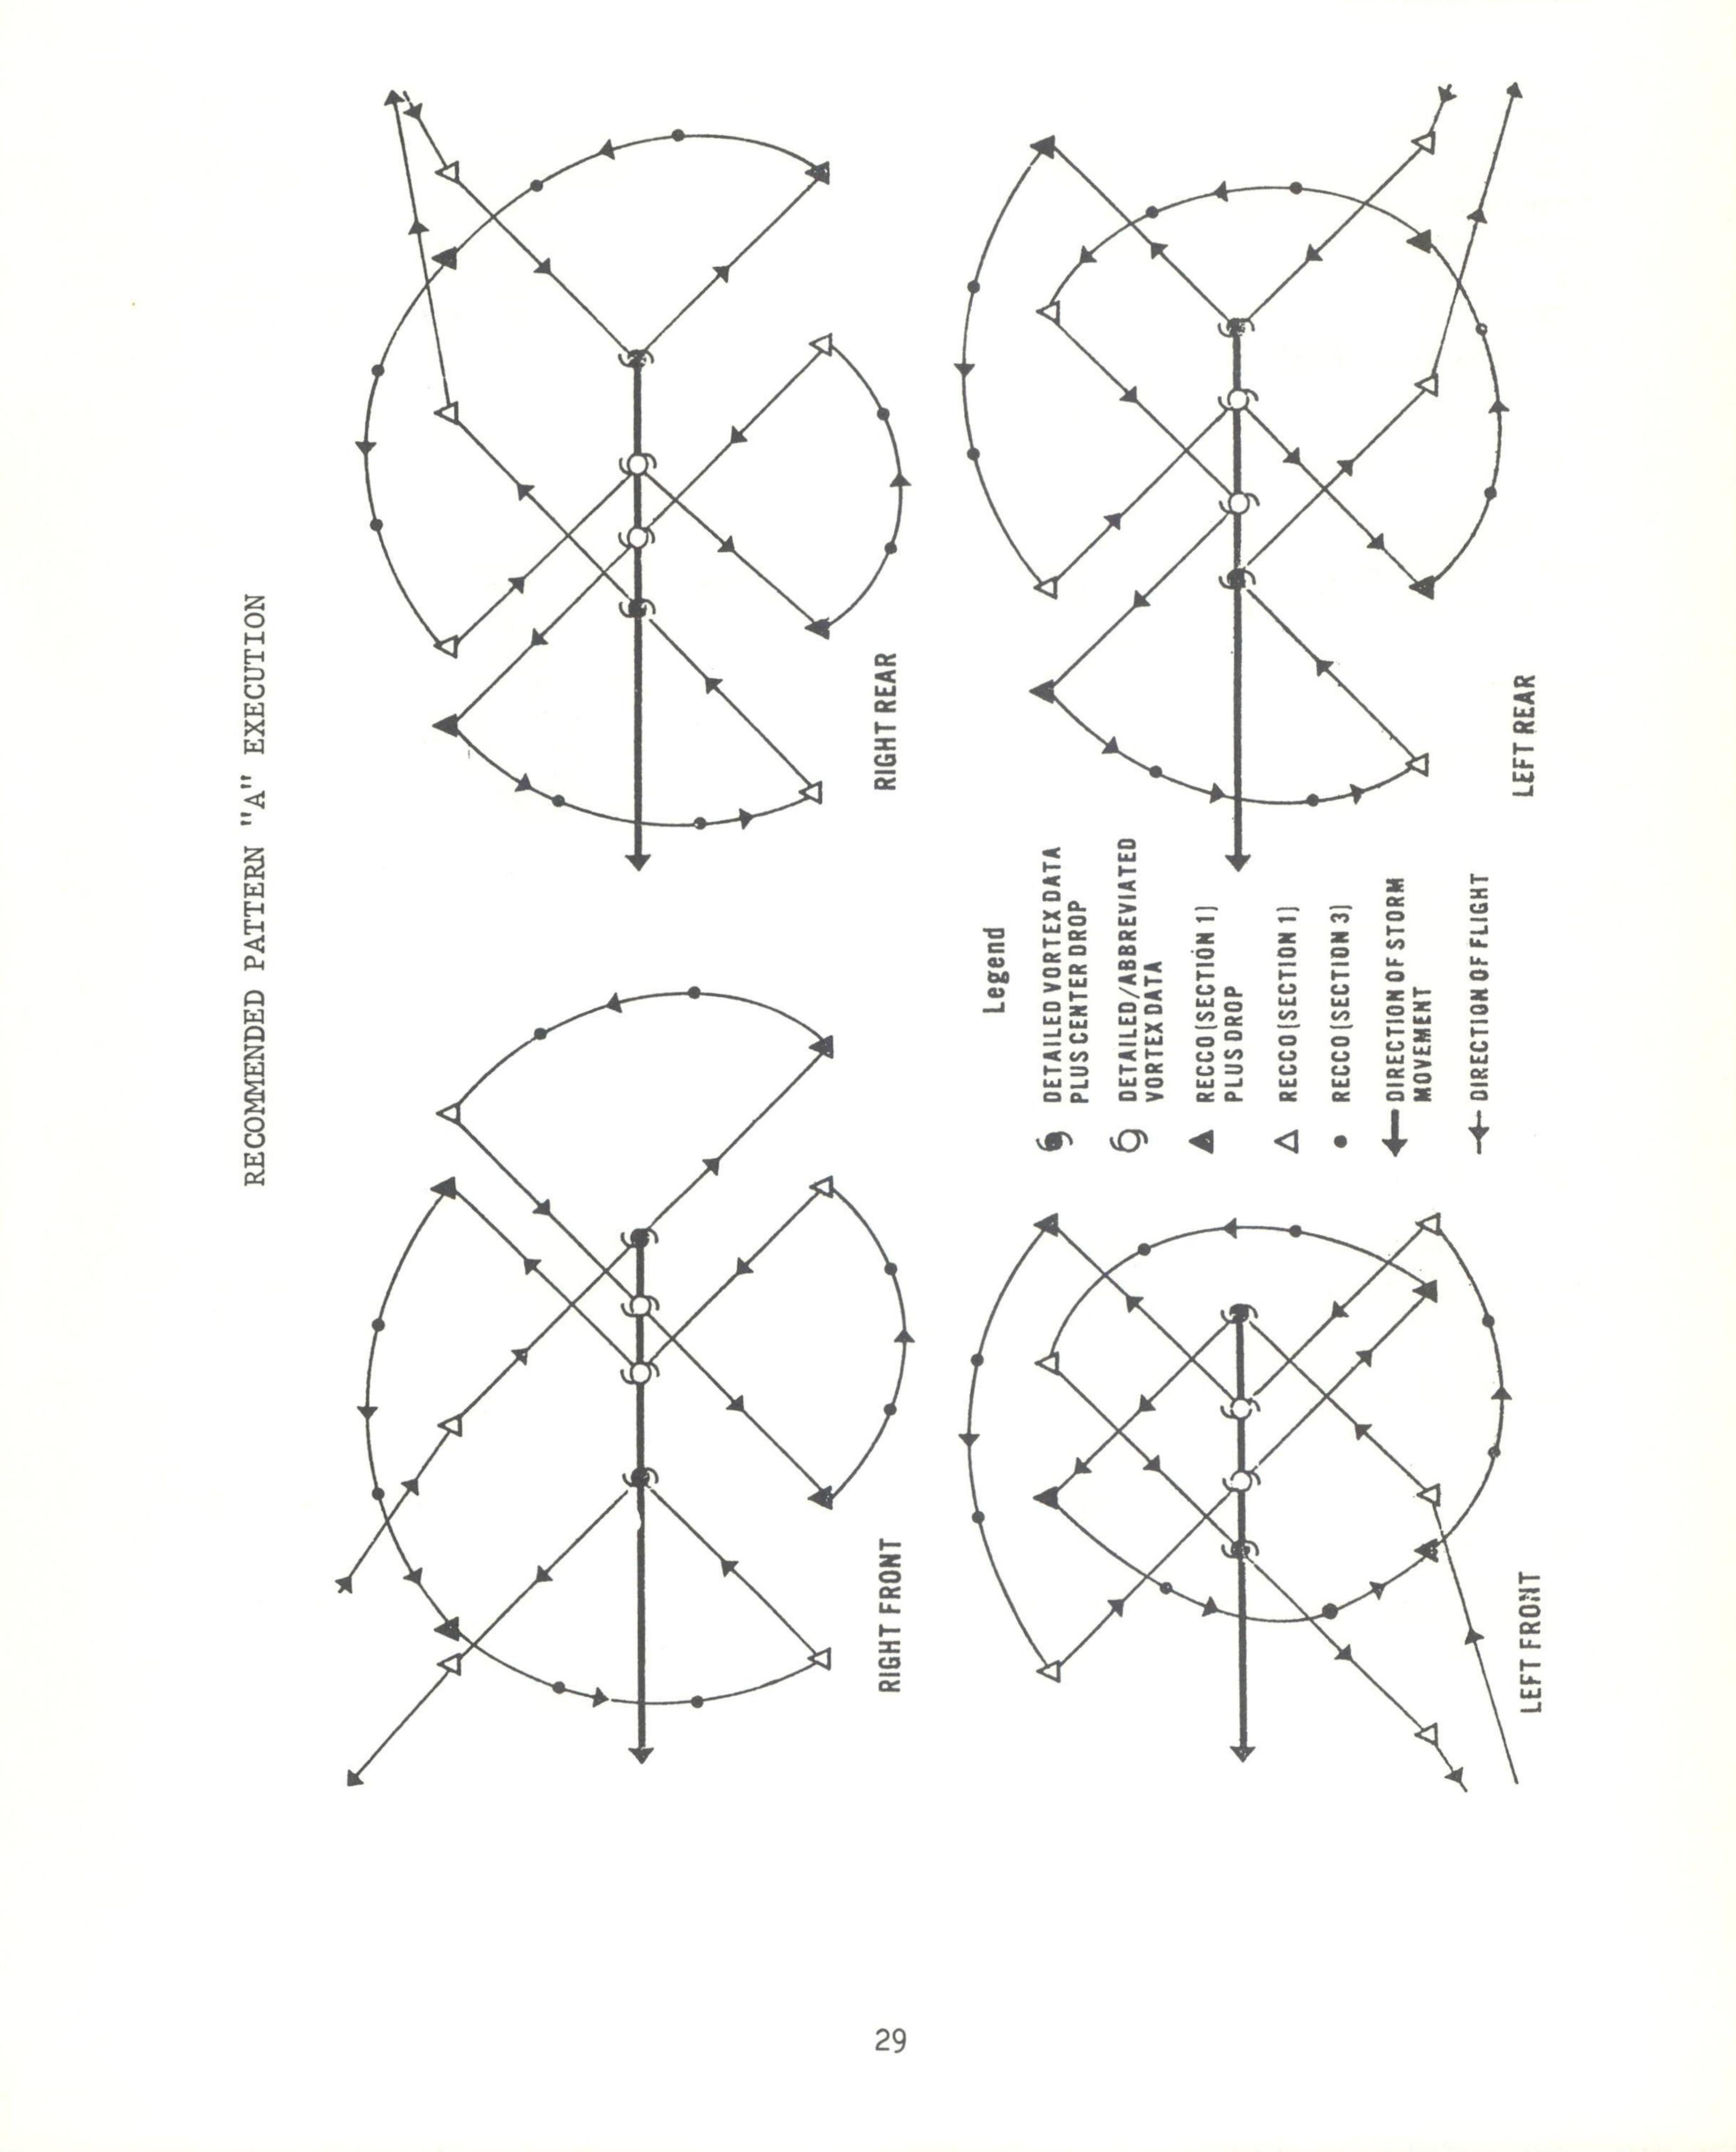

CHAPTER 4 APPENDIX A ATTACHMENT 2

OPERATIONAL FLIGHT PATTERN "B"

Provides vortex data on tropical and subtropical cyclones too distant for more than one vortex fix.

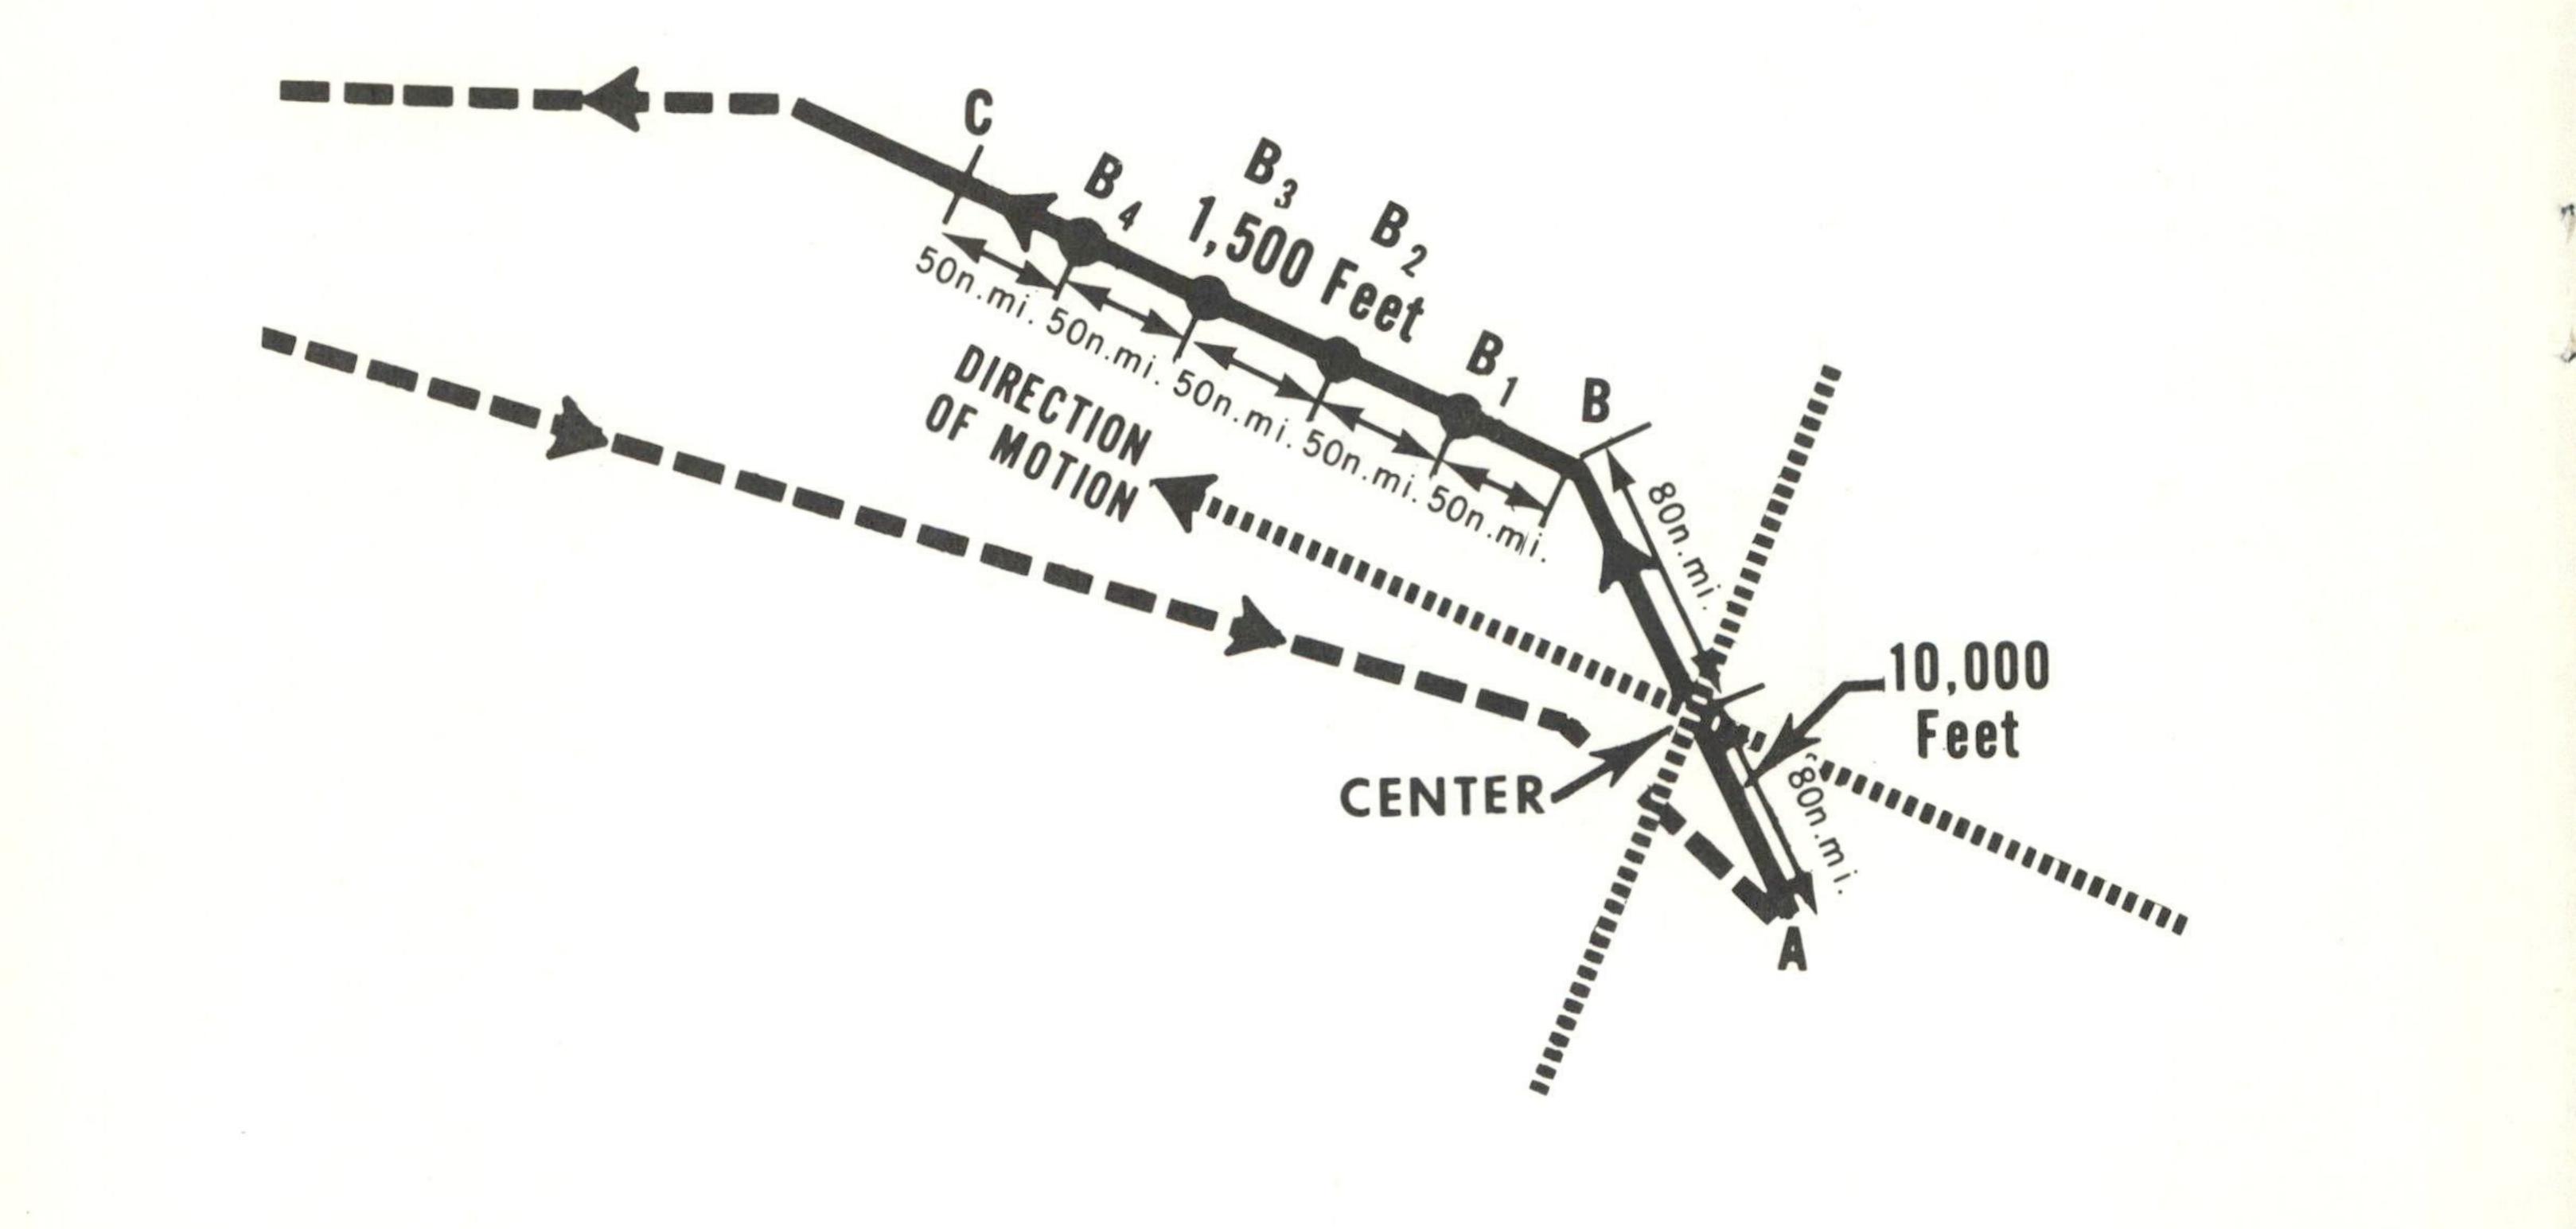


OBSERVATION DETAILS

1. RECCO (Section 1 plus 4ddff and 9ViTwTwTw) is required at points A, B, and C. Transmit immediately. RECCO (Section 3 plus 4ddff and 9ViTwTwTw) is required at points B₁ through B₄. Section 3 data are appended to next RECCO (Section 1) observation. Groups with indicator 4 or 9 are included in observations only when surface winds are discernable or flight is at low level.

2. Supplementary Vortex Data are required for inbound and outbound radials.

3. Detailed Vortex Data message and center dropsonde report are required.



OPERATIONAL FLIGHT PATTERNS C-1 THROUGH C-4 VORTEX AND PERIPHERAL DATA ON DIFFUSE TROPICAL OR SUBTROPICAL CYCLONES

OBSERVATION DETAILS


100

1. RECCO (Section 1 plus 4ddff and 9ViTwTwTw) is required for each transit of a triangle position. RECCO (Section 3 plus 4ddff and 9ViTwTwTw) is required for each transit of a circle position. Section 3 data are appended to next RECCO (Section 1) observation or Abbreviated/Detailed Vortex Message. Group 4 is included in observations only when surface winds are discernable.

2. Abbreviated/Detailed Vortex Data Message is required for each transit of the center when applicable.


3. The maximum flight level wind observed on an outbound radial will be appended to the next RECCO observation.

OPERATIONAL FLIGHT PATTERN C-1

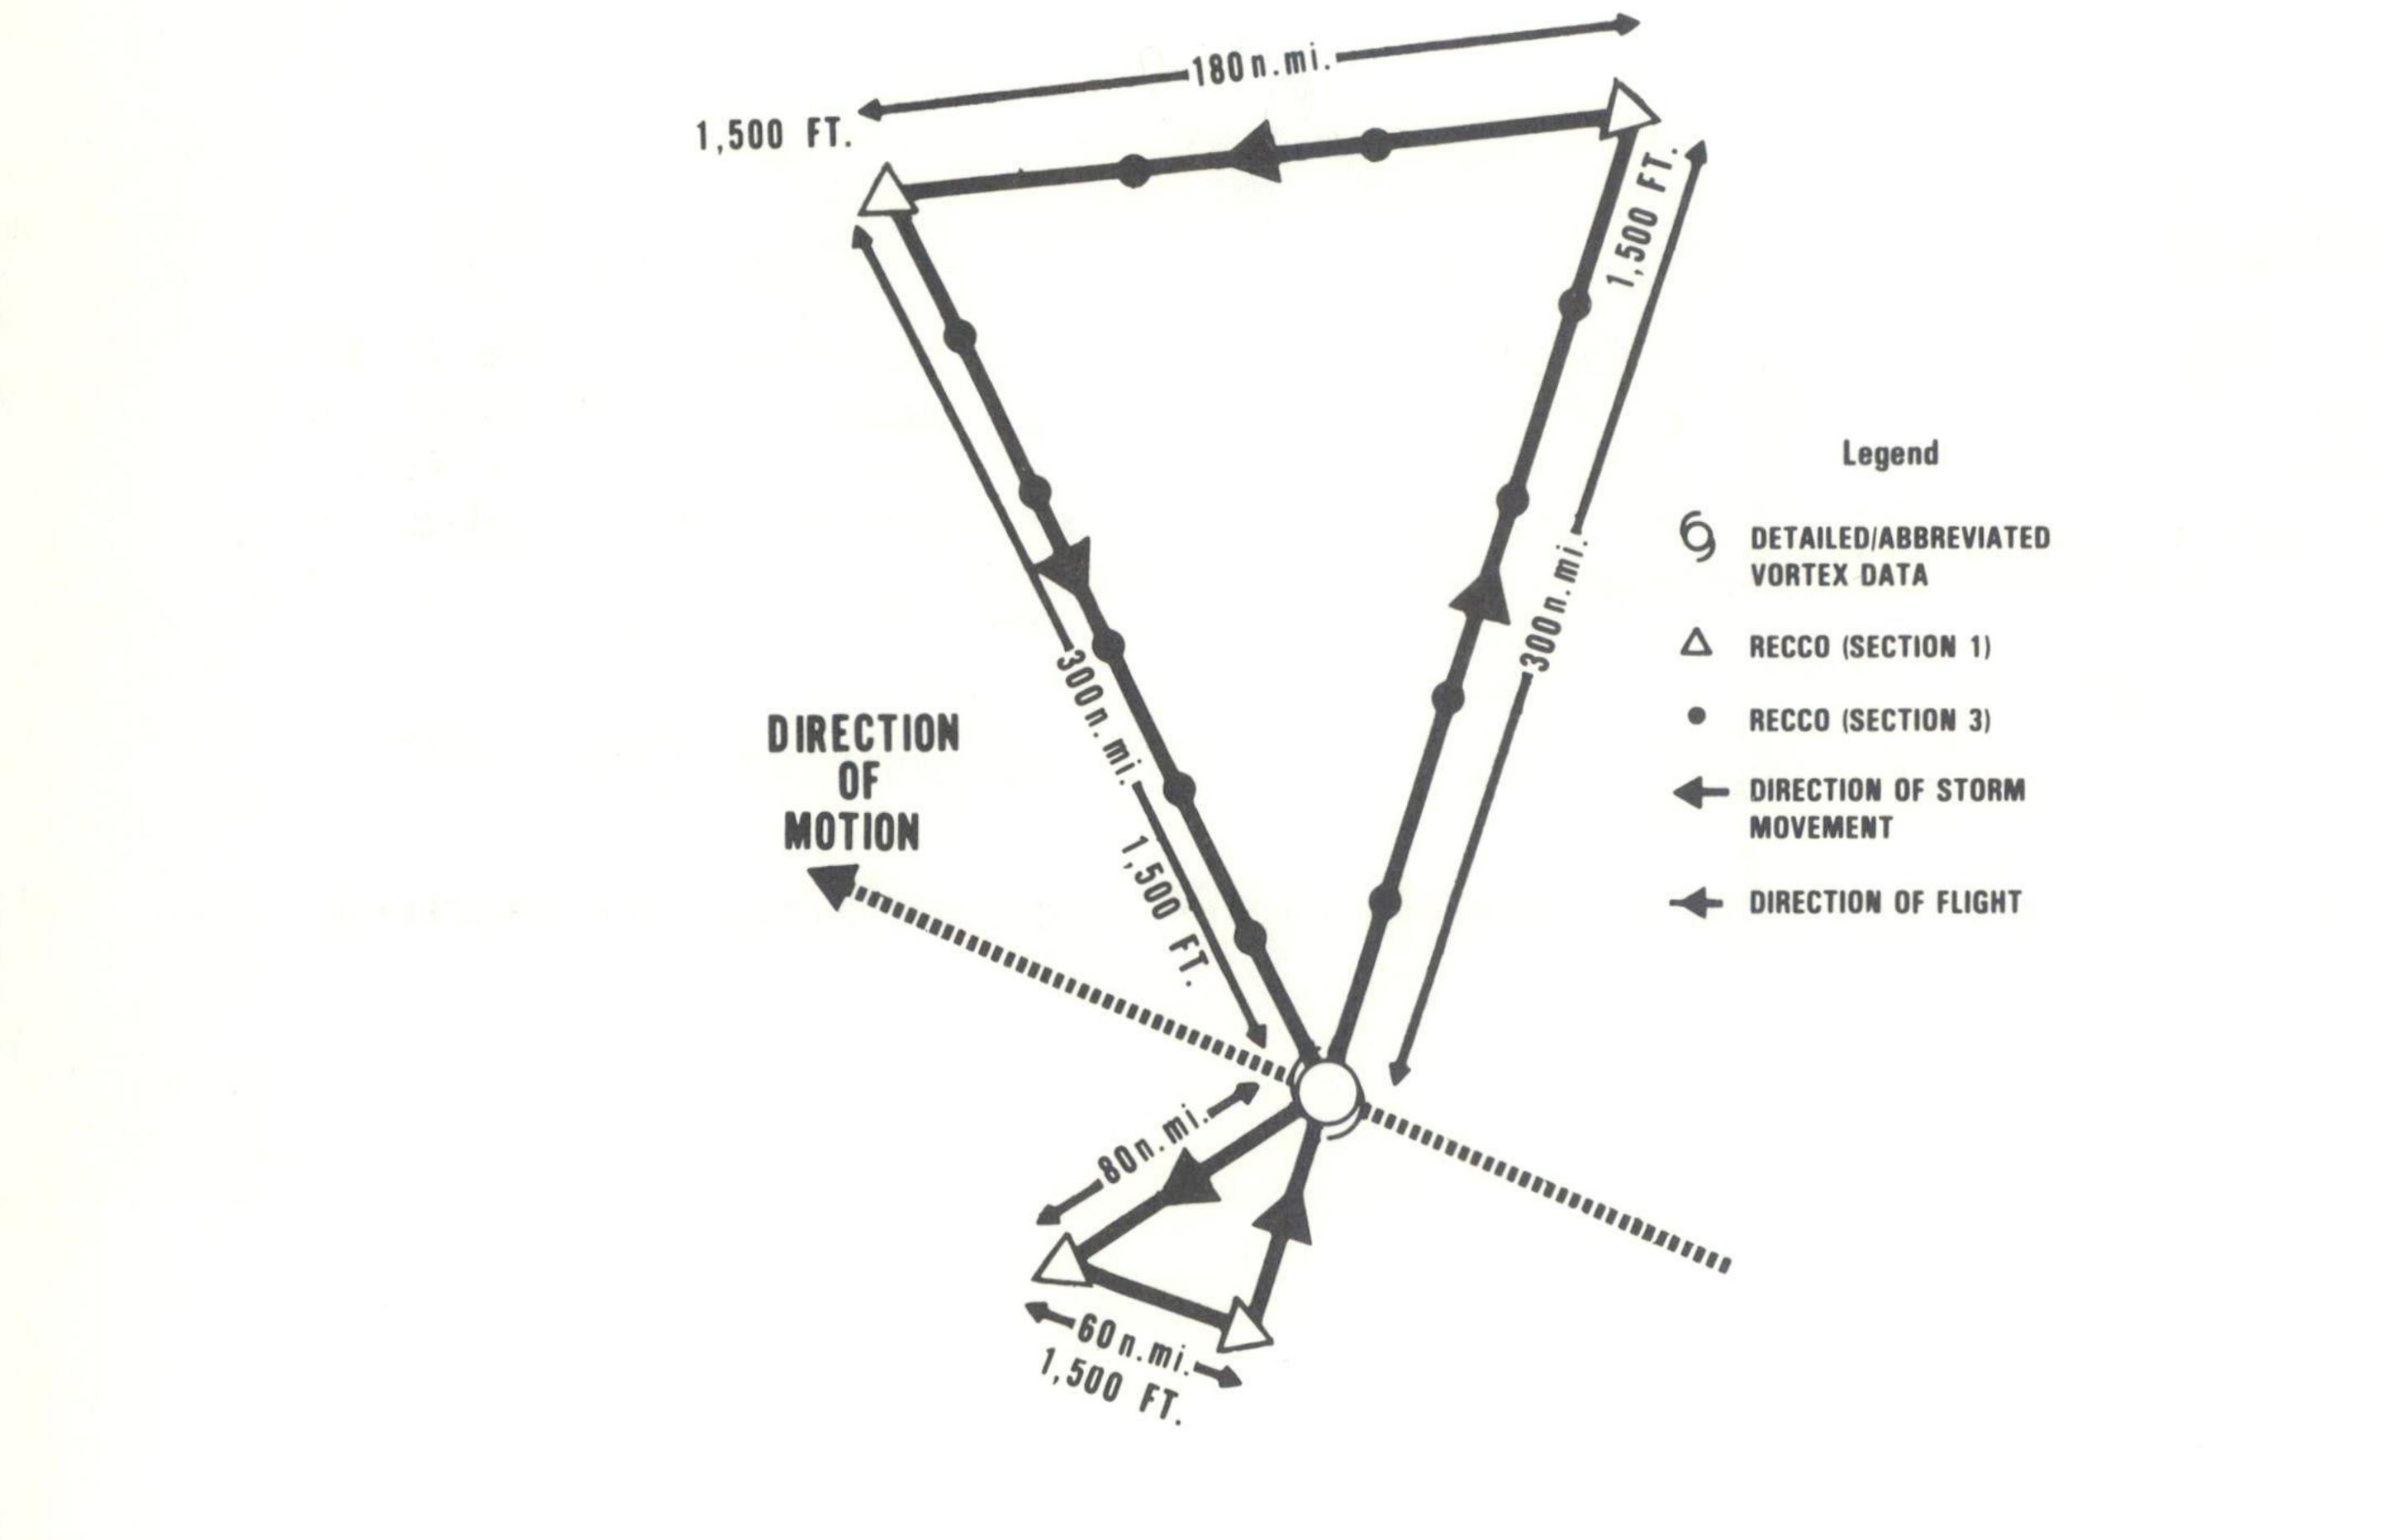

OPERATIONAL FLIGHT PATTERN C-2

1

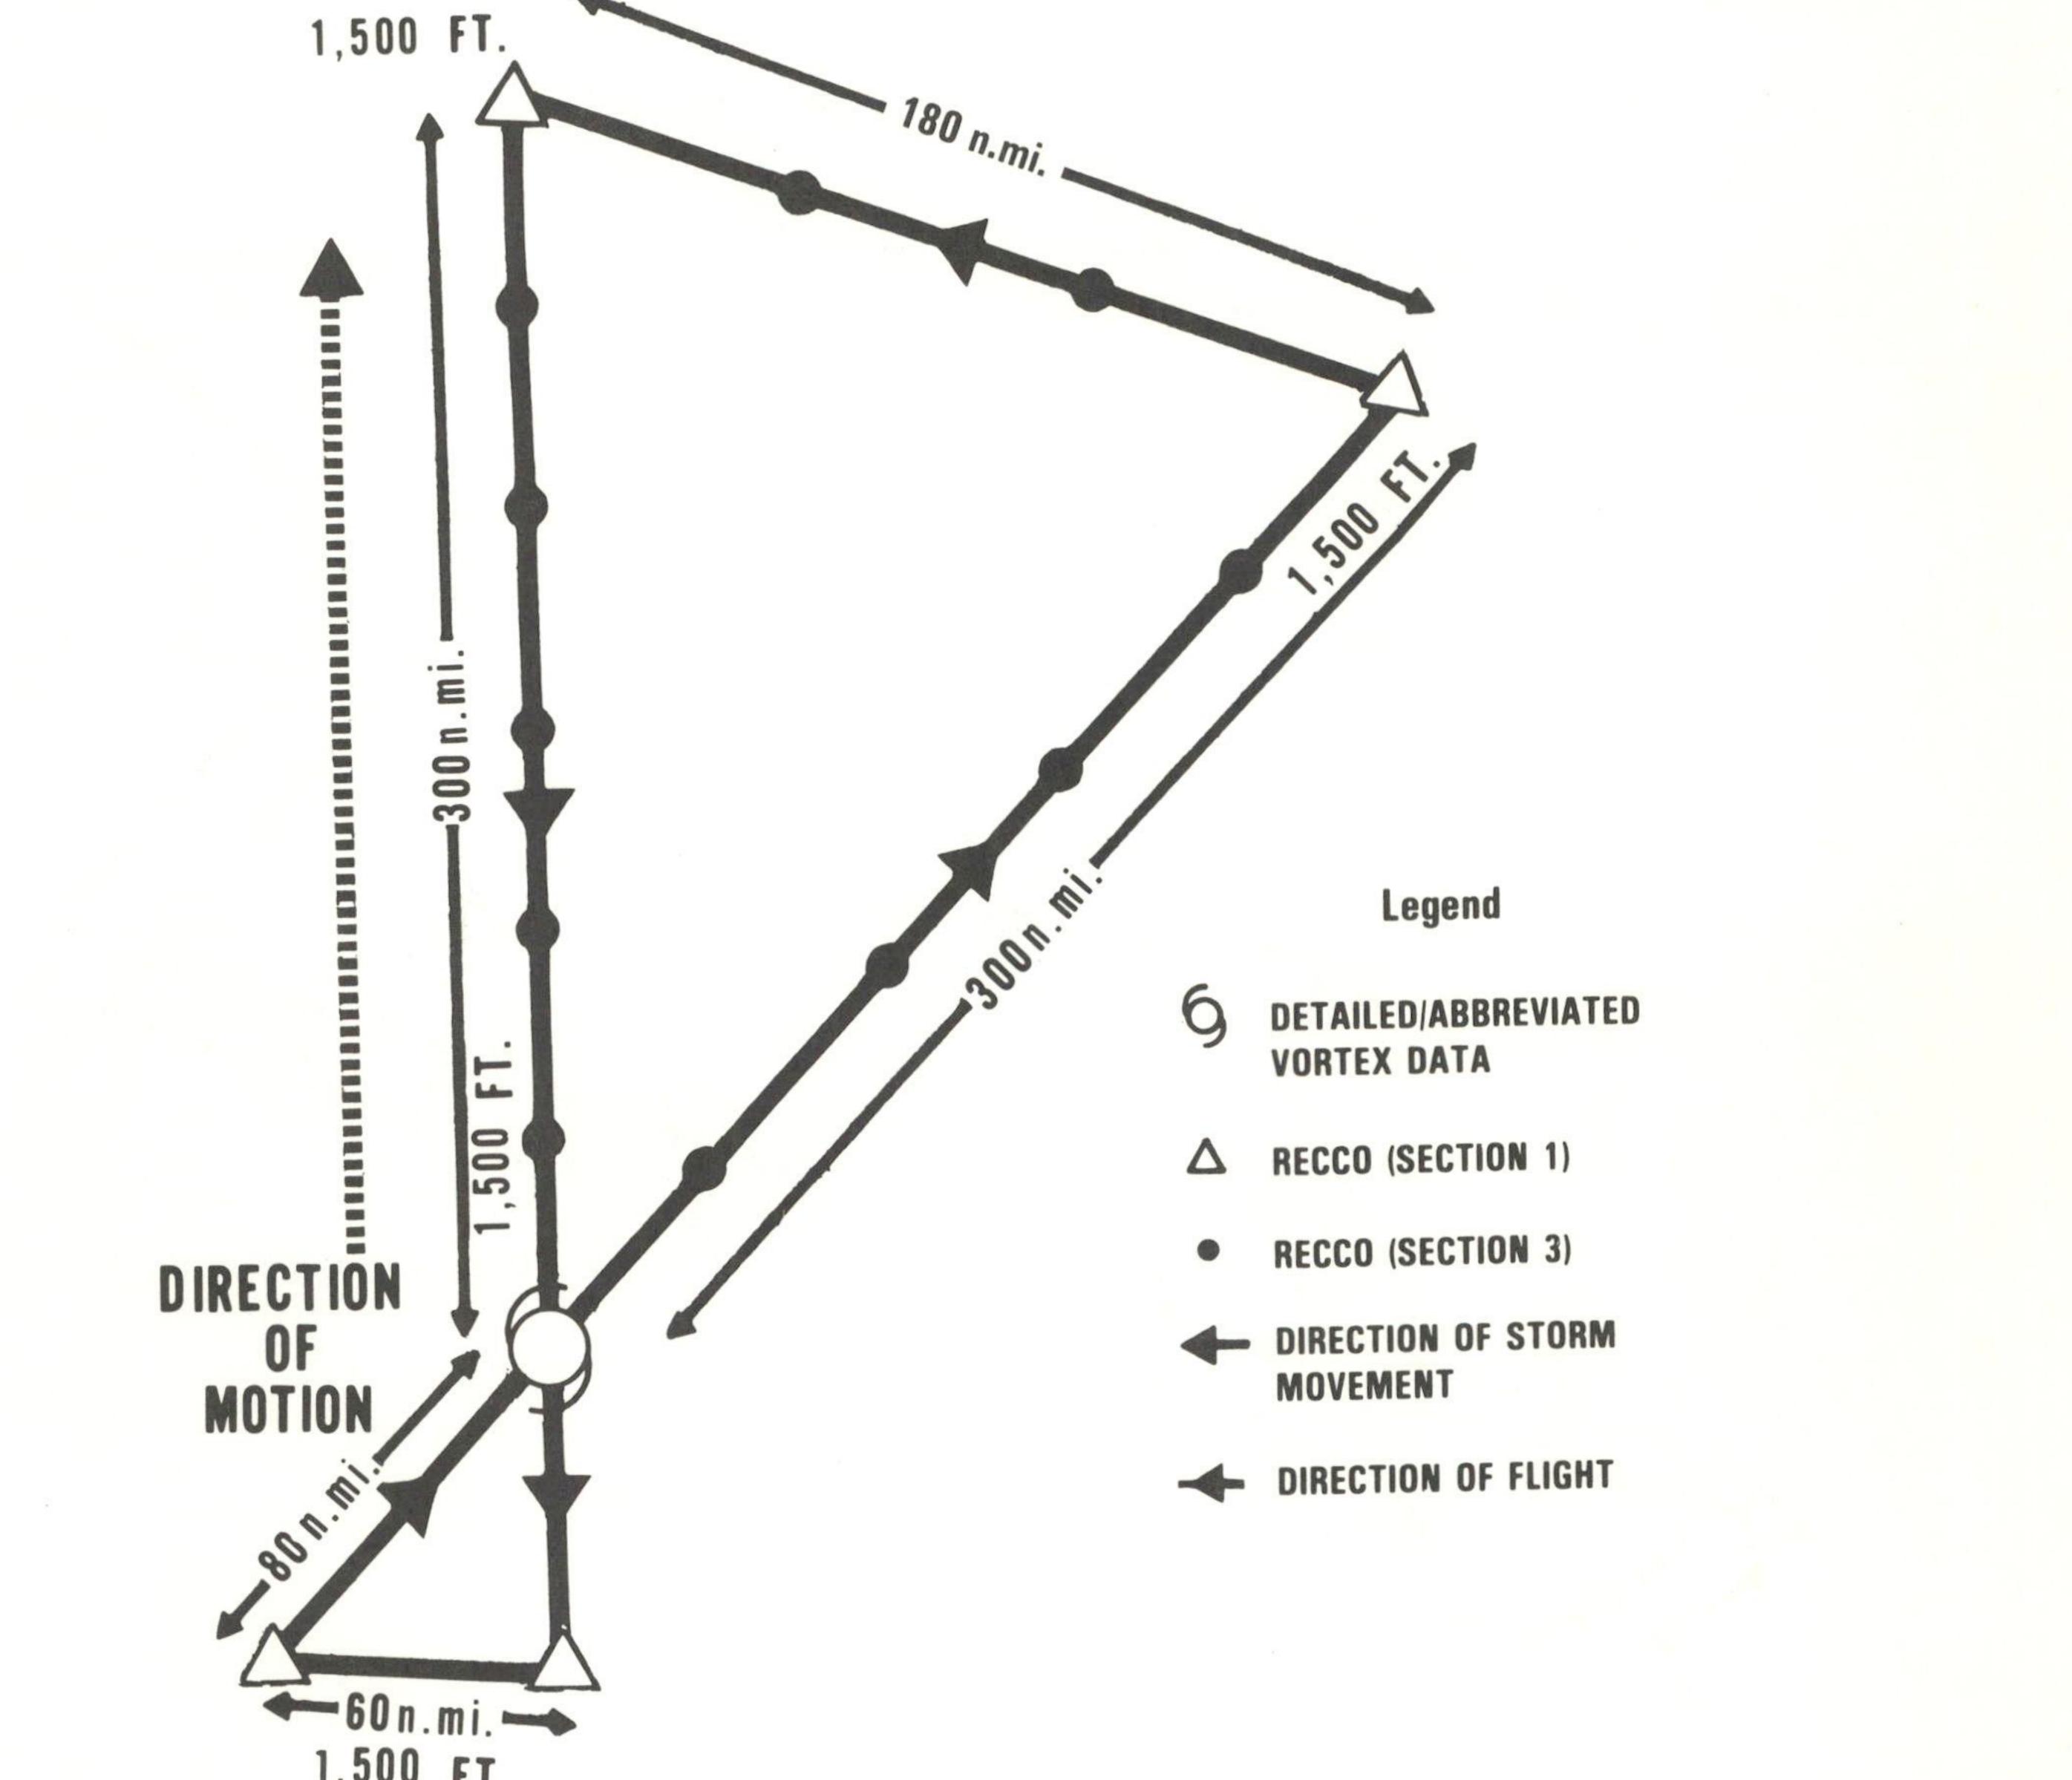


60 n.mi. 1,500 FT.

OPERATIONAL FLIGHT PATTERN C-3

Legend

- **VORTEX DATA**
- .
- Common State MOVEMENT

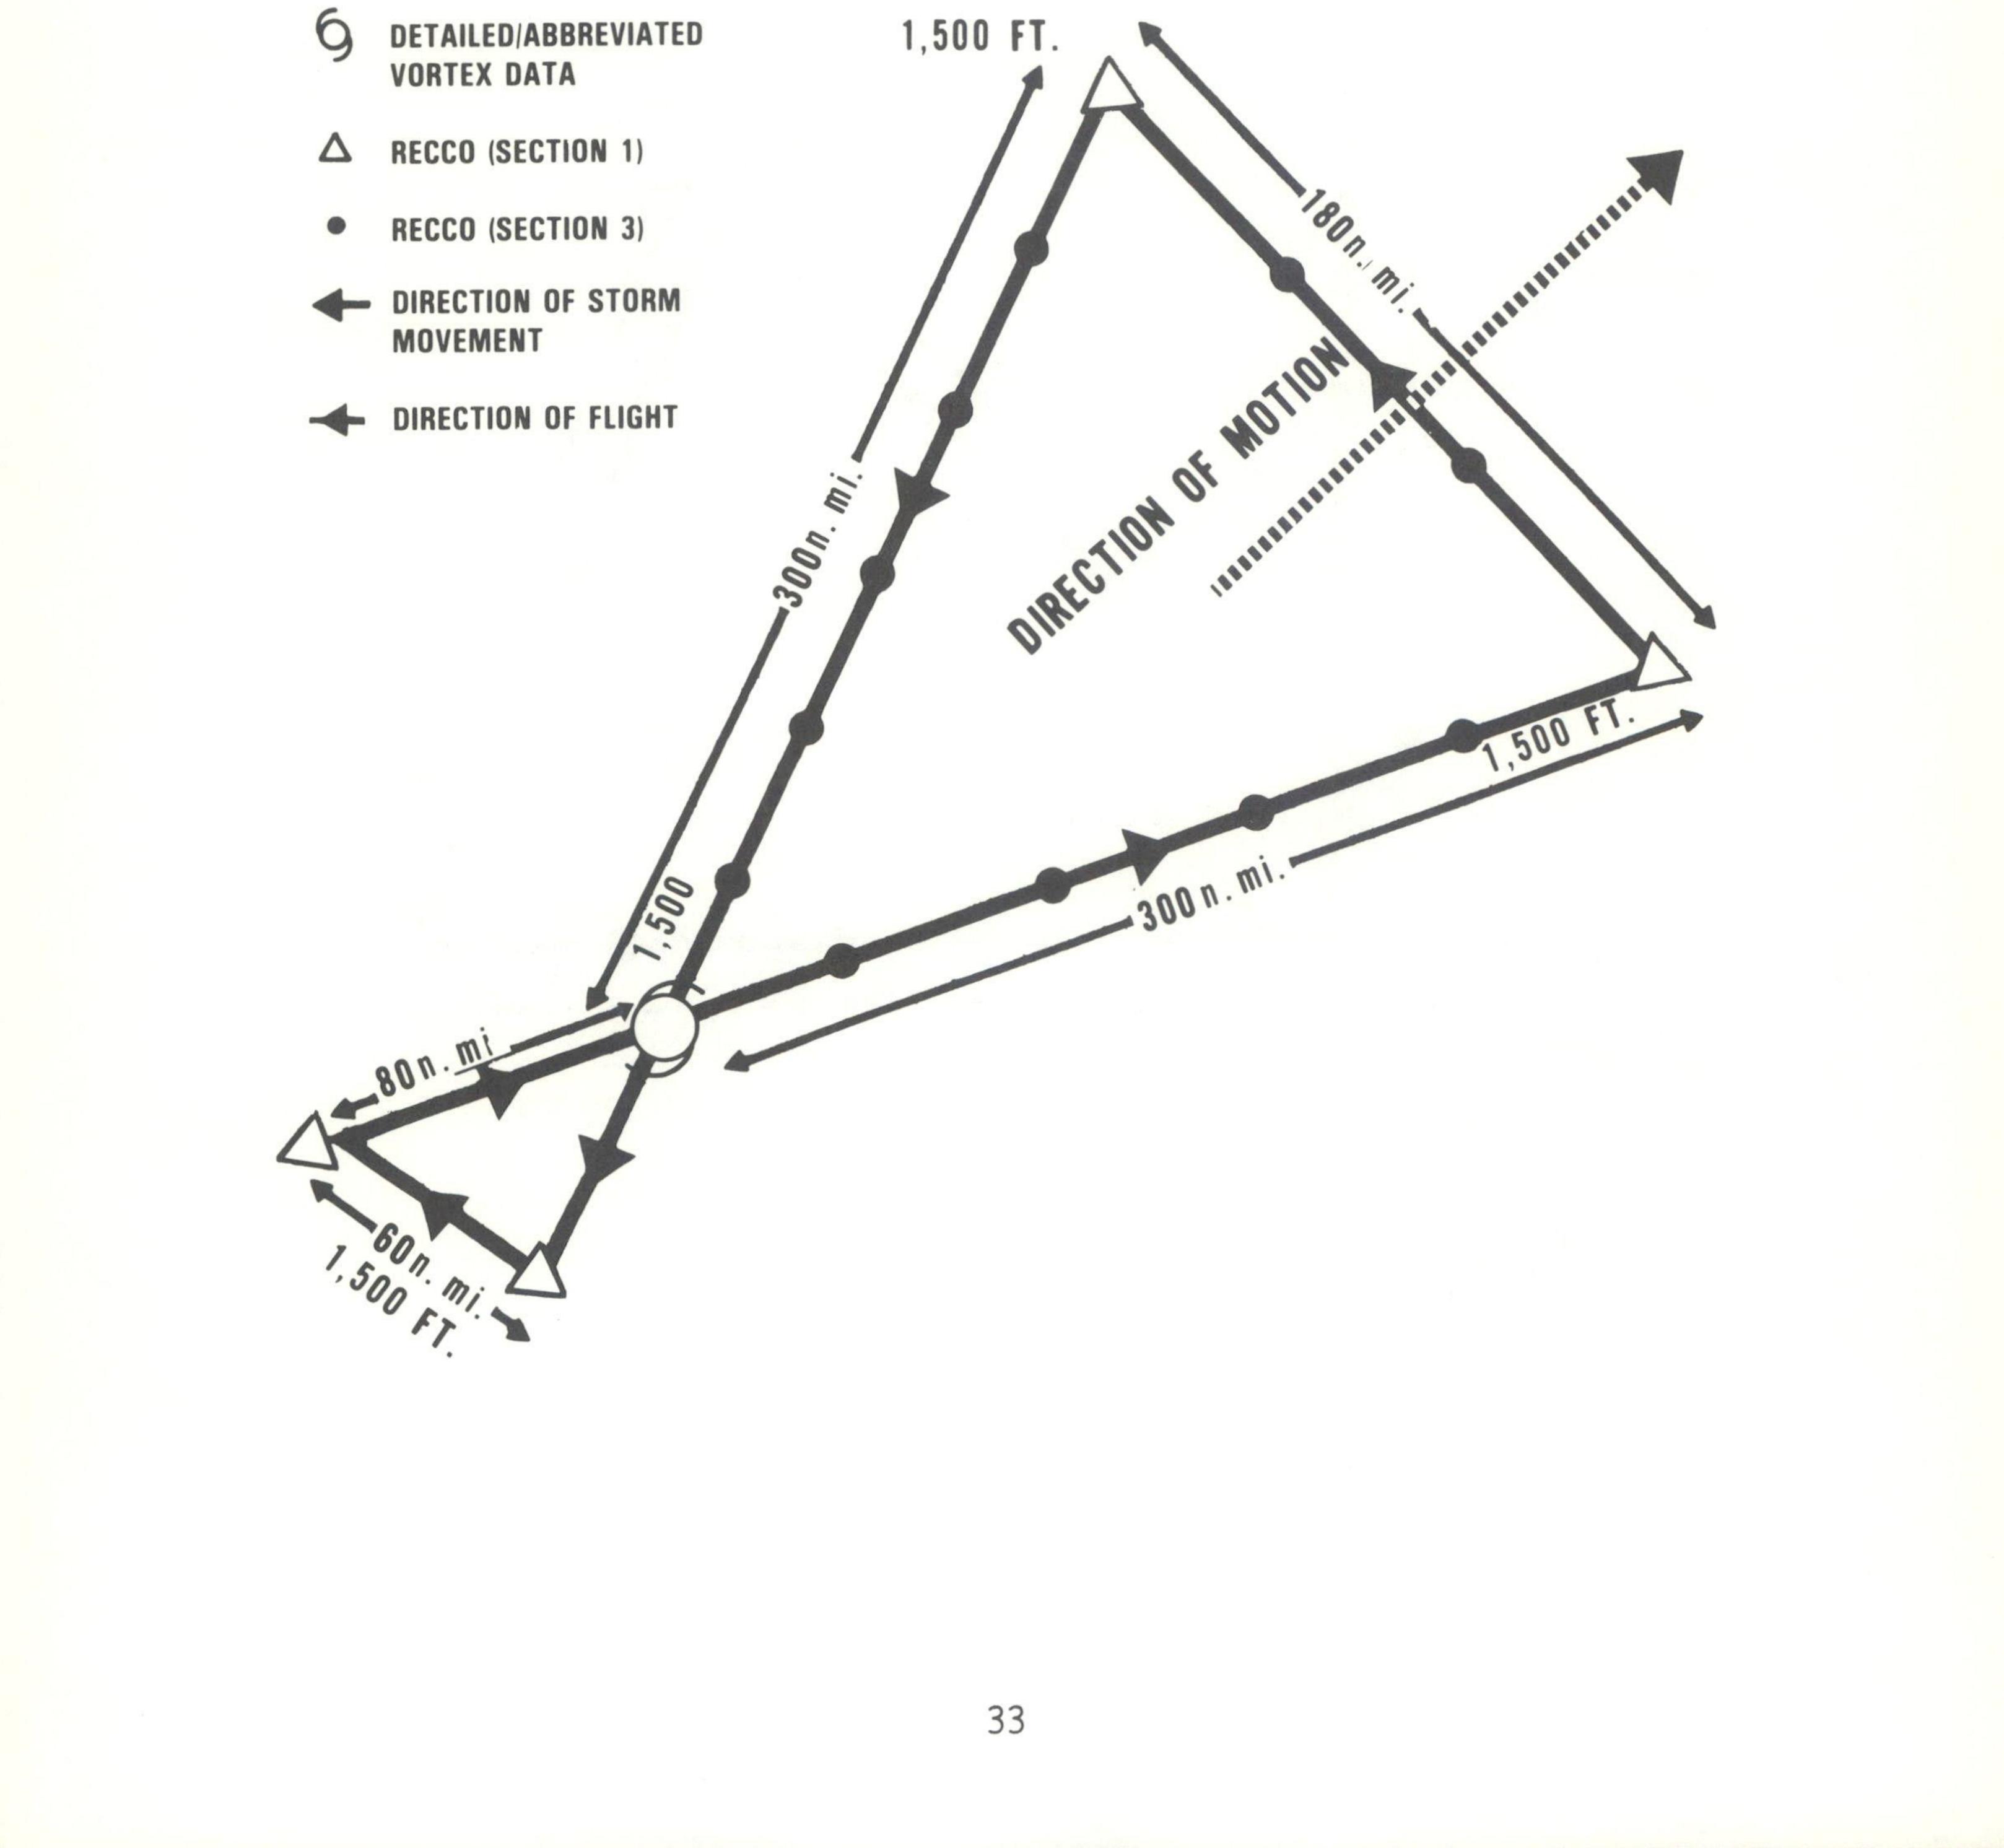


OPERATIONAL FLIGHT PATTERN C-4

Legend

9 DETAILED/ABBREVIATED **VORTEX DATA**


- Δ **RECCO (SECTION 1)**
- .
- MOVEMENT

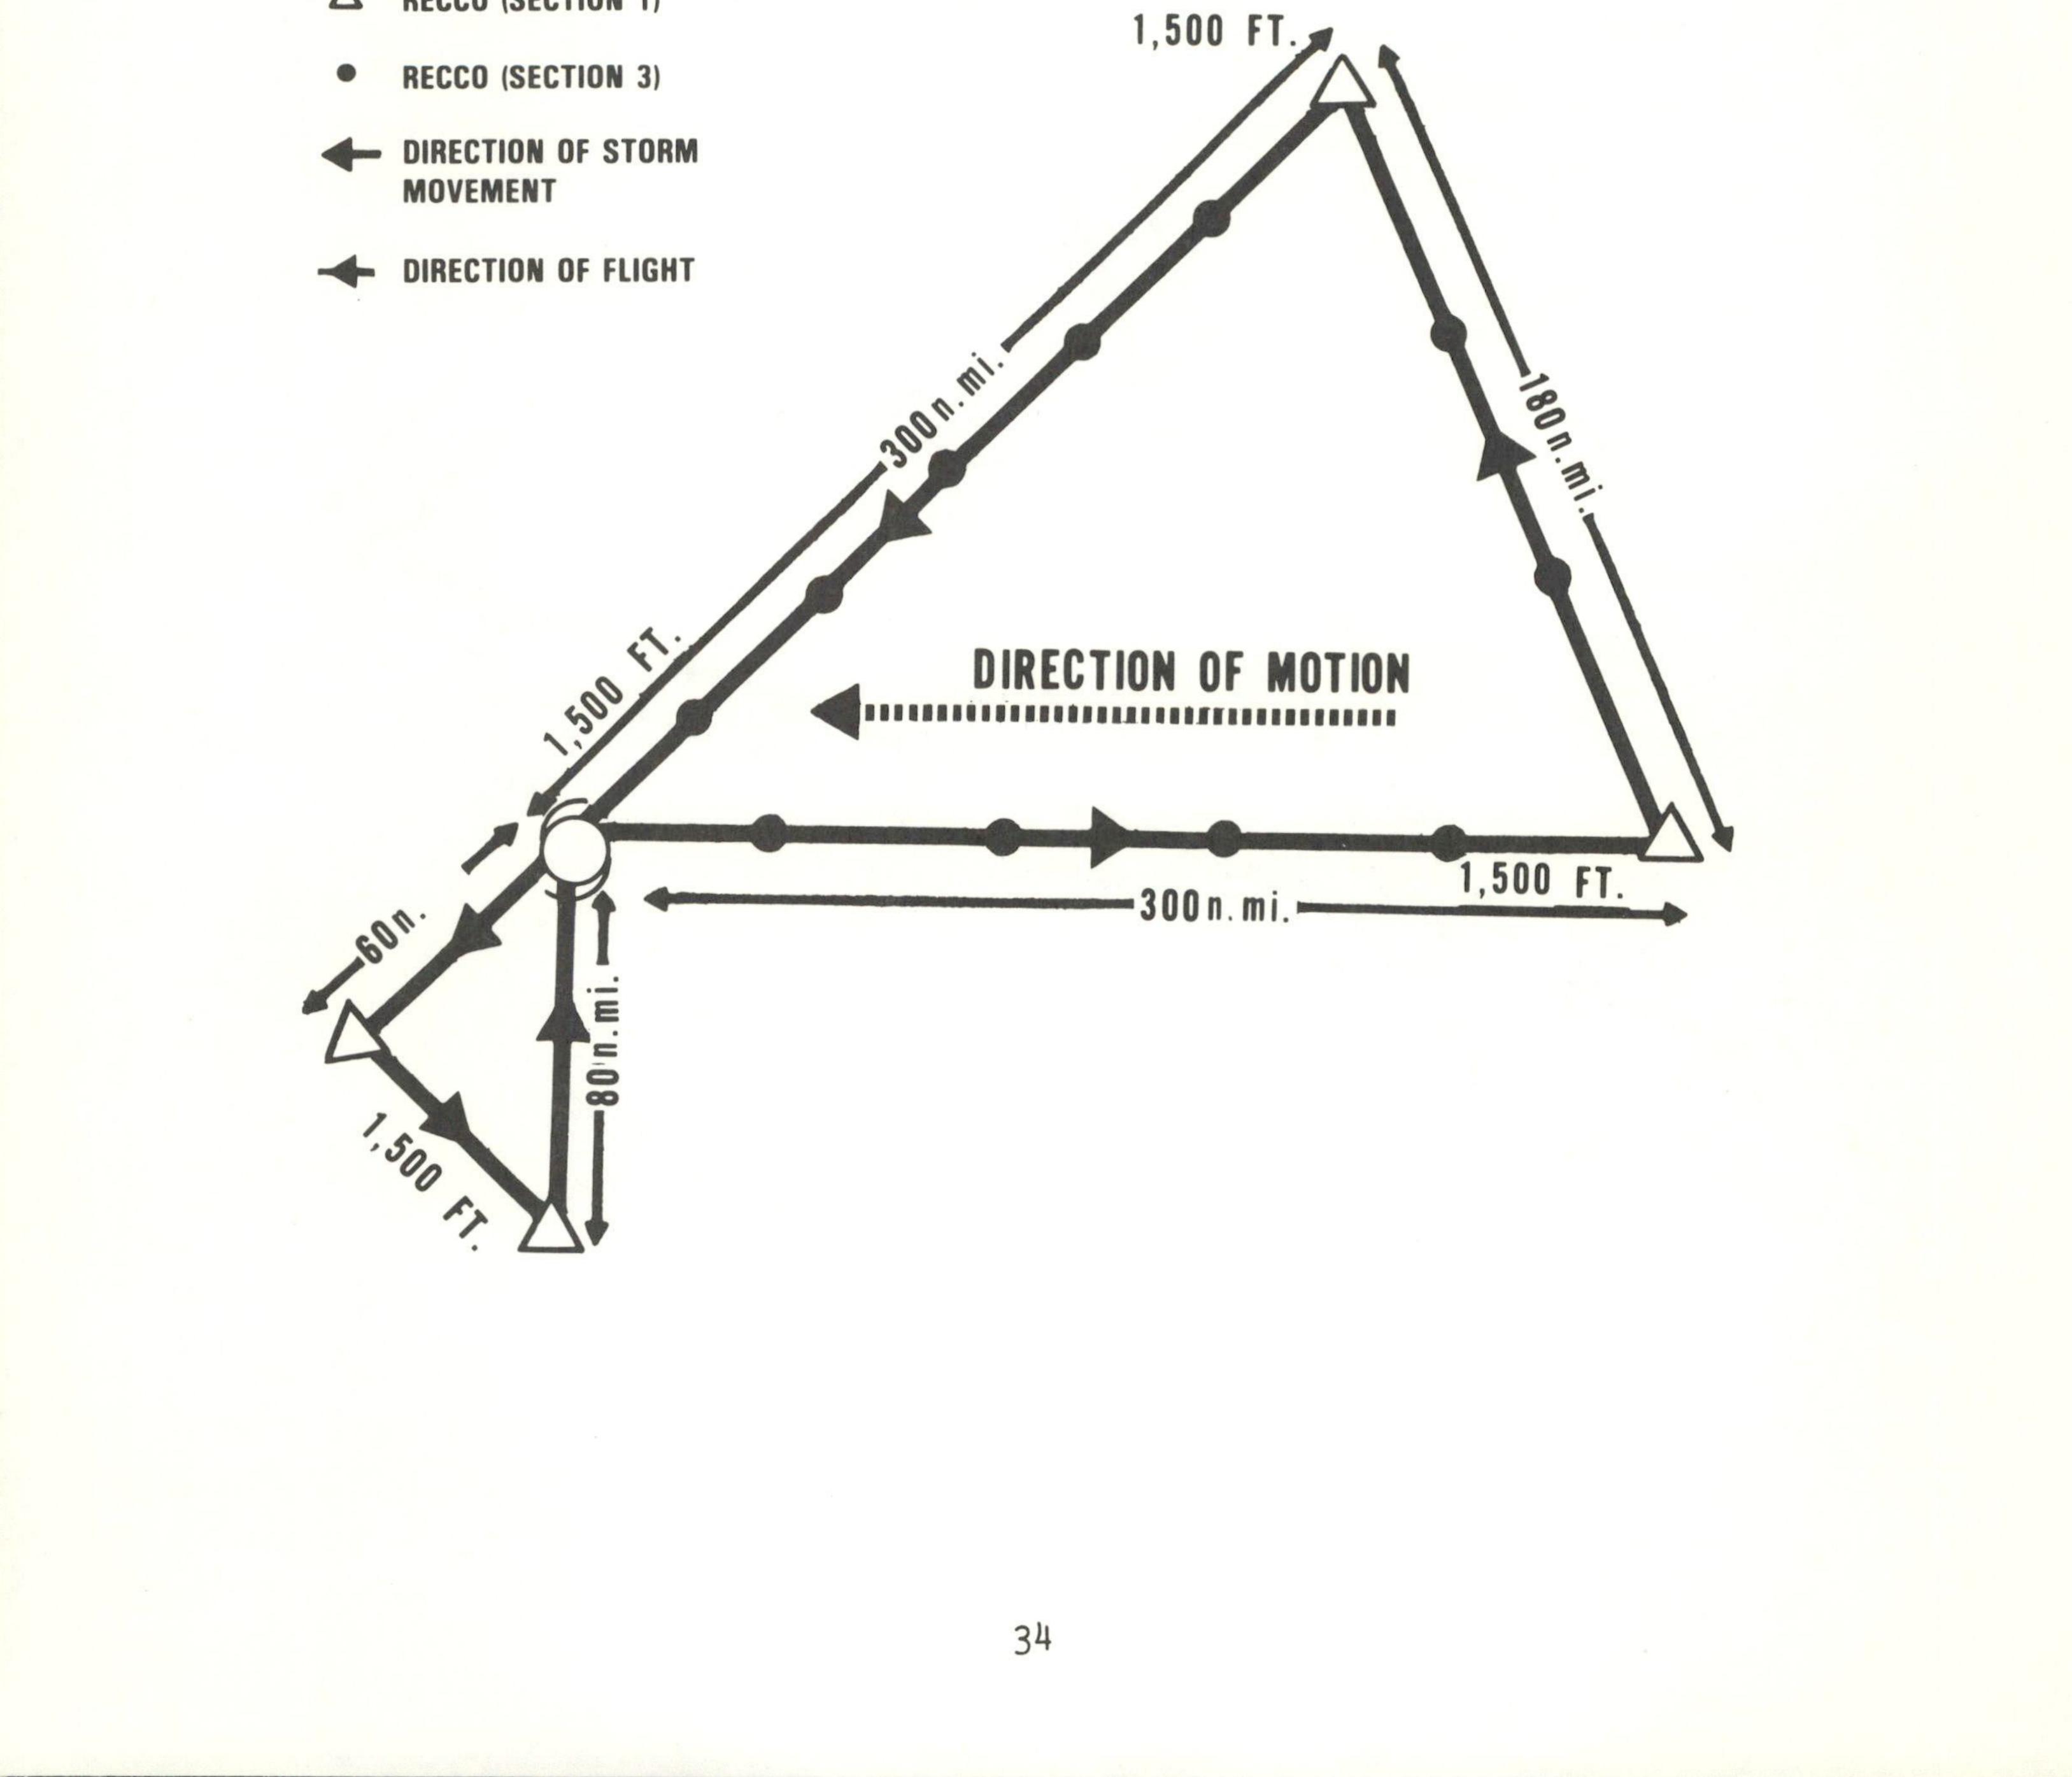

CHAPTER 4 APPENDIX A ATTACHMENT 4

OPERATIONAL FLIGHT PATTERN DELTA

Provides a suggested approach to the investigation of a disturbance to ascertain the existence or nonexistence of a closed circulation, supply RECCO observations in required areas, and locate the vortex center.

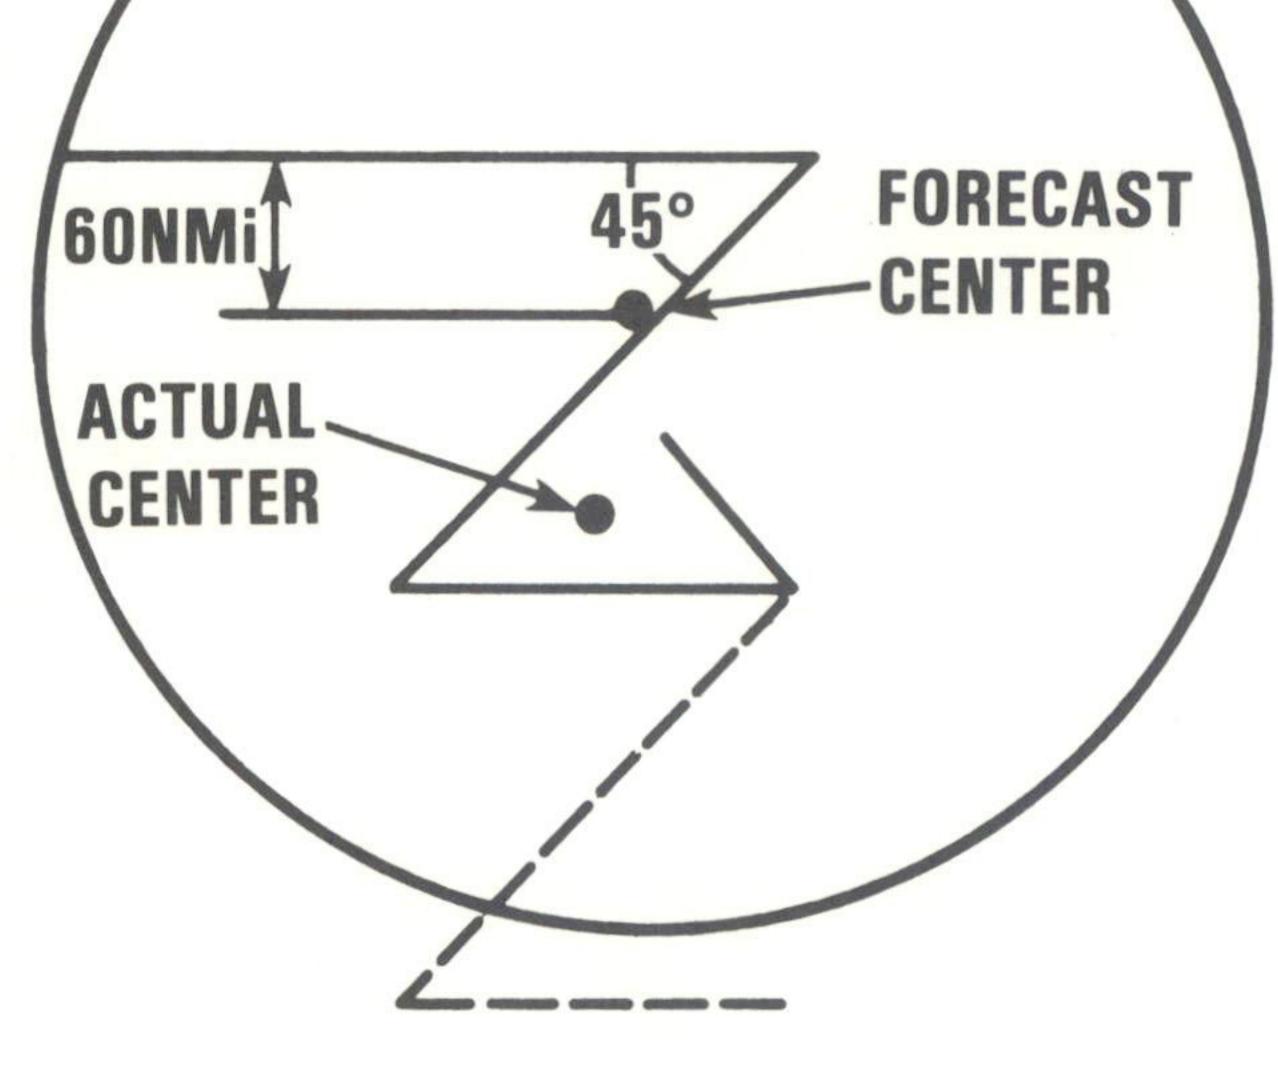

#1. Flight altitude - normally 1,500 feet, but may be adjusted as dictated by data requirements, meteorological conditions, or flying safety factors.

2. RECCO (Section 1 plus 4ddff and 9ViTwTwTw) required every 30 minutes. RECCO (Section 3 plus 4ddff and 9ViTwTwTw) required approximately every 15 minutes. Section 3 data are appended to next RECCO Section 1 observation. The 4 or 9 Group will not be reported if data are not available.

3. Detailed Vortex Data Message required if vortex fix is made.

DISCUSSION:

The Delta pattern is designed to provide the flexibility required in the investigation of a disturbance as follows:

1. The pattern is converted west-east to a mirror image if entry is to be made from the east.

2. The length of the legs is to be adjusted during the pattern to coincide with cyclonic circulation wind shifts, i.e., turn points are selected by the flight meteorologist after observing appropriate sustained wind shifts.


CHAPTER 4 APPENDIX A ATTACHMENT 4 (Continued)

3. If observed data indicate that the aircraft is on the southern side of the circulation, the pattern is converted south-north to a mirror image pattern to enable investigation in the proper areas.

4. If data indicate to the flight meteorologist that the aircraft is far north of any existing circulation, the pattern is extended (as shown by dashed lines) to allow further investigation.

5. If the location of the center becomes obvious, the pattern may be broken off to accomplish a vortex fix. Forecast agencies may request changes in the pattern as dictated by their data requirements.





NHOP COORDINATED REQUEST FOR AIRCRAFT RECONNAISSANCE

____ Original ____ Amendment (Check One)

I. ATLANTIC REQUIREMENTS

HIGH NHC DENS FIX OR STORM NAME ACCY PRIO FCST FLIGHT DEPRESSION # ON STAT-COORD-RITY REQT SUSPECT AREA ION TIME INATES PATTERN MVMT

SUCCEEDING DAY OUTLOOK

REMARKS

II. EASTERN AND CENTRAL PACIFIC REQUIREMENTS

					HIGH	
STORM NAME	FIX OR				DENS	NHC
DEPRESSION #	ON STAT-	COORD-	FLIGHT	FCST	ACCY	PRIO
SUSPECT AREA	ION TIME	INATES	PATTERN	MVMT	REQT	RITY

SUCCEEDING DAY OUTLOOK

The second method wants where the second second

REMARKS

III. DISTRIBUTION

A. TO CARCAH BY 1630Z OR AMEND AT ANY TIME




TROPICAL CYCLONE PLAN OF THE DAY FORMAT --ATLANTIC, EASTERN, AND CENTRAL PACIFIC OCEANS--

FM OL-G HQ AWS CORAL GABLES FL/CARCAH

TO (MAC-APPROVED ADDRESSEES) /(NOAA-APPROVED ADDRESSEES)

SUBJECT TROPICAL CYCLONE RECON POD FROM _____Z (MONTH) (YEAR) TO ____Z (MONTH) (YEAR) FOLLOWS

- I. ATLANTIC
 - 1. (STORM NAME, DEPRESSION, SUSPECT AREA) or (NEGATIVE RECON REQUIREMENTS) FLIGHT ONE (NHC PRIORITY, if applicable)

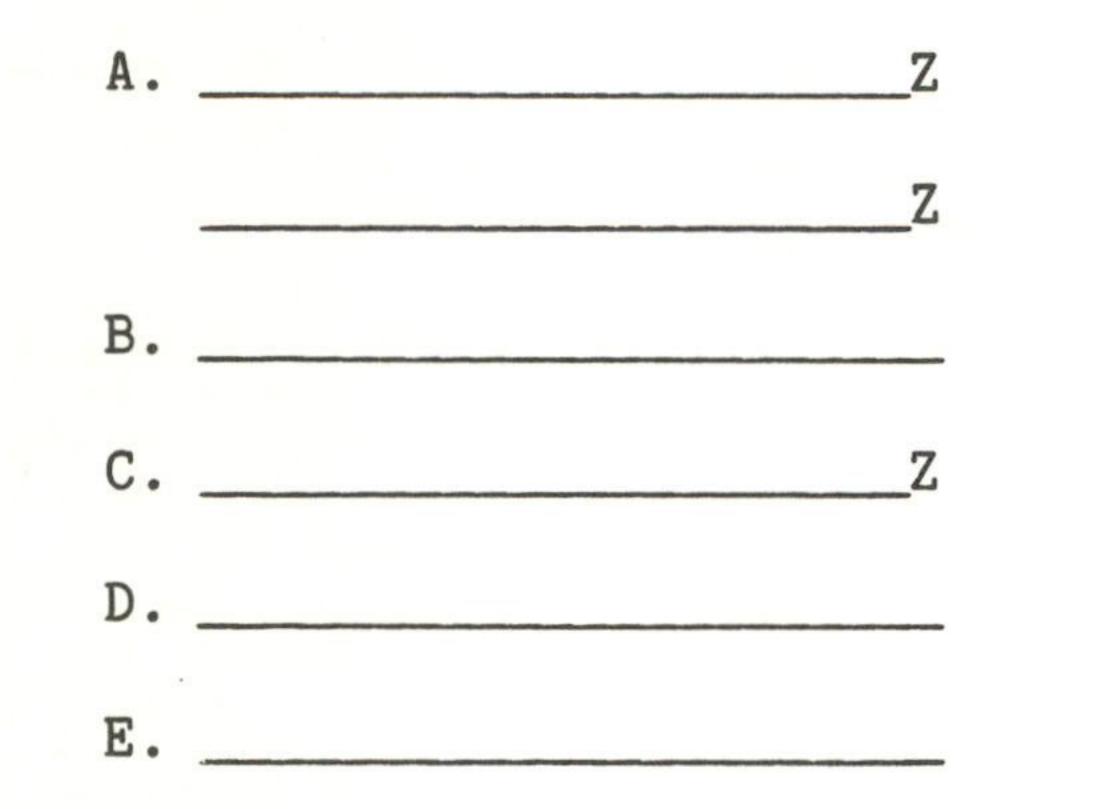


FIX TIMES/ON STATION TIMES (Resources Permitting if applicable)

MISSION IDENTIFIER

ETD

DEPARTURE STATION

FORECAST POSITION/STORM NAME

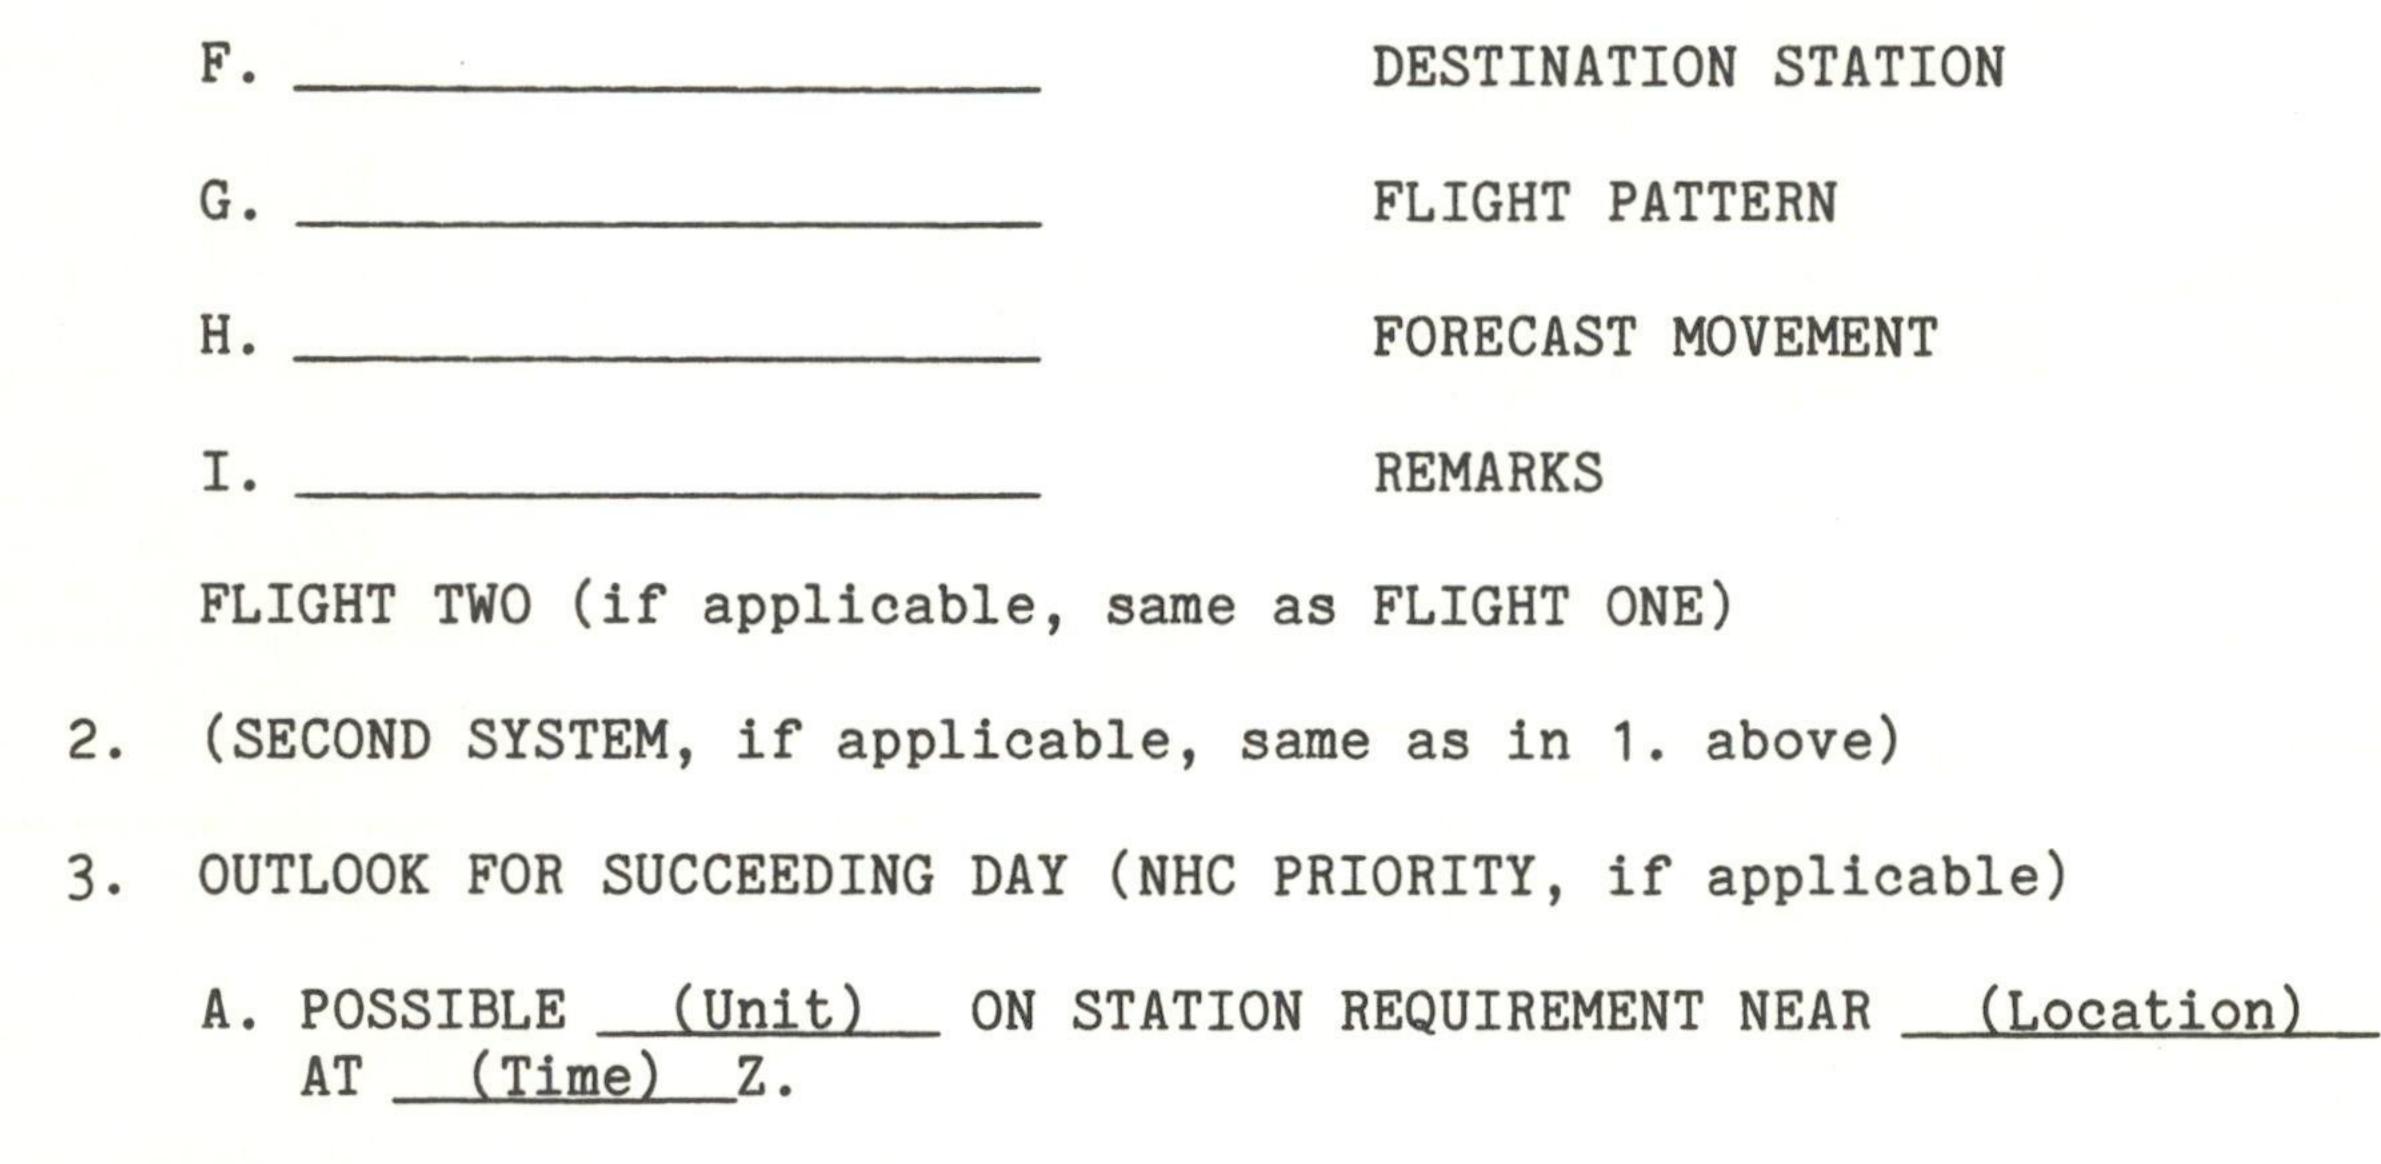

38

II. EASTERN AND CENTRAL PACIFIC (Same as in ATLANTIC)

BT NNNN

VORTEX DATA MESSAGE

P HEADING (PRECE	DENCE IM	MEDIAT	E)		
N IDENTIFIER AND	OBSERVA	TION N	UMBER		
DEVIATED) (DETA		ODTEV	DATA MESSACE		
(DETA	ILED) VO	URIEX			
		2	DATE AND TIME UI		
DEG	MIN N	S	LATITUDE OF VOR	RTEX FIX *	
DEG	MIN E	W	LONGITUDE OF VO	RTEX FIX *	
MB		м	MINIMUM HEIGHT A	T STANDARD LEVEL	
		ΚТ	ESTIMATE OF MAX	IMUM SURFACE WIND OBS	ERVED
DEG		NM	BEARING AND RAN	IGE FROM CENTER OF MA	XIMUM SURFACE WIND
DEG		ΚТ	MAXIMUM FLIGHT	LEVEL WIND NEAR CENTE	ER
DEG	2	NM	BEARING AND RAN	IGE FROM CENTER OF MA	XIMUM FLIGHT LEVEL WIND
		MB			
C /		м			
C /		м			
C /		C	DEWDOINT TEMP /	SEA SUDEACE TEMP INSI	DEEVE
			EYE SHAPE/ORIEN centric; E - Elliptic 01-010 to 190; 17- Circular eye 8 miles of major axis 15 NM,	TATION/DIAMETER. Code al. Transmit orientation of 170 to 350. Transmit diame in diameter. E09/15/5 – E length of minor axis 5NM. (e eye shape as: C - Circular; CO - Con- major axis in tens of degrees, i.e., ter in nautical miles. Examples: C8- Iliptical eye, major axis 090-270, length
DEG	MIN	S	CONFIRMATION OF	FIX: Coordinates and Tim	e *
DEG	MIN E	W			
		Z			
/			Radar; 3 – Wind; 4 if visible; indicate k 1 – 1500 ft; 8 – 85	 Pressure; 5 – Temperature both surface and flight level 0 mb; 7 – 700 mb; 5 – 500 	centers only when same): 0 - Surface;
/		NM	NAVIGATION FIX A	ACCURACY/METEOROLOG	ICAL ACCURACY
			REMARKS		
>	N IDENTIFIER AND REVIATED) (DETA DEG DEG DEG DEG DEG C / C / C / C /	N IDENTIFIER AND OBSERVA REVIATED) (DETAILED) V DEG MIN N DEG MIN E MB DEG DEG DEG C / C / C / C / C / DEG MIN N	N IDENTIFIER AND OBSERVATION N REVIATED) (DETAILED) VORTEX Z DEG MB MB MB MB MB MB KT DEG DEG NM DEG MB MB MB MB MB C / DEG MIN NS DEG MIN N S DEG MIN N S DEG MIN S DEG MIN S	N IDENTIFIER AND OBSERVATION NUMBER REVIATED) (DETAILED) VORTEX DATA MESSAGE Z DATE AND TIME OF DEG MIN N S LATITUDE OF VOR MB MINIMUM EIGHT A KT ESTIMATE OF MAX DEG NM BEARING AND RAN MINIMUM SEA LEVE MB MINIMUM SEA LEVE MB C/ M MAX FLT LVL T C/ M MAX FLT LVL T C/ M MAX FLT LVL T C/ C DEWPOINT TEMP/ EYE CHARACTER: FYE SHAPE/ORIEN CONFIRMATION OF DEG MIN N S DEG MIN N S CONFIRMATION OF Radar; 3 - Wind; 4 if visible; indicate I 1 - 1500 ft; 8 - 85 200 mb; 9 - Other.	N IDENTIFIER AND OBSERVATION NUMBER ZEVIATED) (DETAILED) VORTEX DATA MESSAGE Z DATE AND TIME OF FIX DEG MIN N S LATITUDE OF VORTEX FIX * DEG MIN N S LATITUDE OF VORTEX FIX * MB M LONGITUDE OF VORTEX FIX * MB M MINIMUM HEIGHT AT STANDARD LEVEL KT ESTIMATE OF MAXIMUM SURFACE WIND OBS DEG NM BEARING AND RANGE FROM CENTER OF MA DEG NM BEARING AND RANGE FROM CENTER OF MA DEG NM BEARING AND RANGE FROM CENTER OF MA DEG NM BEARING AND RANGE FROM CENTER OF MA MB MINIMUM SEA LEVEL PRESSURE COMPUTED MB MAX FLT LVL TEMP/PRESSURE ALT/(// C / M MAX FLT LVL TEMP/PRESSURE ALT/(// C / C DEWPOINT TEMP /SEA SURFACE TEMP INSID EYE CHARACTER: Closed wall, poorly define C // C DEWPOINT TEMP /SEA SURFACE TEMP INSID EYE CHARACTER: Closed wall, poorly define C // C DEWPOINT TEMP /SEA SURFACE TEMP INSID DEG MIN N S CONFIRMATION OF FIX: Coordinates and Tim DEG

INSTRUCTIONS: Items A through G (and H when extrapolated) are transmitted from the aircraft immediately following the fix. The remainder of the message is transmitted as soon as available for scheduled fixes and at the ARWO's discretion for unscheduled (intermediate) fixes. * CHECK SUM REQUIRED IN WESTPAC. () USED IN WESTPAC

-	14	DTTQQ
£	22	h hhh
	33	DTTQQ
æ	41	нннн
T	52	DTTQQ
X	60	нннн
т	1	DTTQQ
æ	79	нннн
er).		

FORM	
MESSAGE	
DATA	
LEX	

AR	Y VORTEX DATA	MESSAGE								
	2 ddDEG	3 FLZZZ								
	DEG	FL								
	5 FRONT	6 QUAD								
	8 DTT	9 DJHHH	10	DTTQQ	11	рјннн	12	DTTQQ	13	D , ННН
	80	4	4		m		č		-	•
	16 DTTQQ	17 64RRR	18	50RRR	19	34RRR	20	MXFFF	21	BBBRR
		64	50		34		X W			
	24 FRONT RFAR	25 QUAD	Ň							
	27 DT1	28 DJHHH	29	DTTQQ	30	DJHHH	31	DTTQQ	32	DIHHH
	80	4	4		m		e		-	>
	35 DTTQQ	36 64RRR	37	50R R R	38	34RRR	39	MXFFF	40	BBBRR
	Ø	64	50		34		XW			
	43 FRONT	44 011AD								
	REAR	3								
	46 DTTOQ	47 DJHHH	48	DTTQQ	49	рјинн	50	DTTQQ	19	DJHHH
	8	4	4		m		3		٢	
	54 DTTQQ	55 64RRR	56	50RRR	57	34 RRR	58	MXFFF	59	BBBRR
	10	64	50		34		W X			
	62 FRONT REAR	63 QUAD								
	65 D	66 DJHHH	67	DTTQQ	68	DJHHH	69	DTTQQ	70	DJHHH
	80	4	4		e		e		-	
	73 DTTQQ	74 64RRR	75	50RRR	76	34RRR	77	MXFFF	78	BBBRR
	0	64	50		34		WX			

ARY	VORTEX DATA	A MESSAGE								
	2 ddDEG	3 FLZZZ								
	DEG	FL								
	5 FRONT	6 QUAD								
	8 DTT	9 DJHHH	10	DTTQQ		рјннн	12	DTTQQ	13	рјннн
	80	4	4		m		e		-	•
	16 DTTQQ	17 64RRR	18	50RRR	19	34RRR	20	MXFFF	21	BBBRR
	0	64	50		34		XW			
	24 FRONT	25 QUAD	Ň							
	27 DT1	28 DJHHH	29	DTTQQ	30	DJHHH	31	DTTQQ	32	DIHHH
	80	4	4		ę		ę	9	-	5
	35 DTTQQ	36 64RRR	37	50RRR	38	34RRR	39	MXFFF	40	BBBRR
	6	64	50		34		XW			
	43 FRONT									
	RE									
	46 DTTOQ	47 DJHHH	48	DTTQQ	49	DJHHH	50	DTTQQ	19	DJHHH
	80	4	4		č		ę		-	ŝ
	54 DTTQQ	55 64RRR	56	50RRR	57	34 RRR	58	MXFFF	59	BBBRR
	Ø	64	50		34		X W			
	62 FRONT	63 QUAD								
		66 DJHHH	67	DTTQQ	68	DJHHH	69	DTTQQ	70	DJHHH
	00	4	4		ŝ		e		-	•
	73 DTTQQ	74 64RRR	75	50RRR	76	34RRR	77	MXFFF	78	BBBRR
	0	64	50		34		WX			

ARY	VORTEX DATA	A MESSAGE								
	2 ddDEG	3 FLZZZ								
	DEG	FL								
	5 FRONT REAR	6 QUAD								
	8 DT	9 DJHHH	10	DTTQQ		рјннн	12	DTTQQ	13	рјннн
	8	4	4		m		e		-	
	16 DTTQQ	17 64RRR	18	50RRR	19	34RRR	20	MXFFF	21	BBBRR
		64	50		34		XW			
	24 FRO	25 QUAD								
	27 C	28 DJHHH	29	DTTQQ	30	DIHHH	31	DTTOO	32	DIHHH
	00	•	4		т					
	35 DTTQQ	36 64RRR	37	50RRR	38	34RRR	39	MXFFF	40	BBBRR
	6	64	50		34		XW			
	43 FRONT	44								
	RE									
	46 DTTOQ	47 DJHHH	48	DTTQQ	49	рјннн	50	DTTGQ	19	DJHHH
	80	4	4		ę		ę		٢	
	54 DTTQQ	55 64RRR	56	50RRR	57	34 RRR	58	MXFFF	59	BBBRR
	Ø	64	50		34		X W			
	62 FRONT RFAR	63 QUAD								
		66 DJHHH	67	DTTQQ	68	DJHHH	69	DTTQQ	70	DJHHH
	80	4	4		ę		e		-	
	73 DTTQQ	74 64RRR	75	50RRR	76	34RRR	77	MXFFF	78	BBBRR
	0	64	50		34		WX			

DATE	AIRCRAF	T NUMBER	FLIGHT METEOROLOGIST	LOGIST		
MANOP HEADING (P	PRECEDENCE IMMEDIAT	Ξ.				
MISSION IDENTIFIER	AND OBSERVATION N	UMBER				
SUPPLEMENTAI	C DAT	A MESSAGE				
-	2 ddDEG	3 FLZZZ				
AZIMUTH	DEG	FL				
4 LEFT RIGHT	5 FRONT	6 QUAD				
7 DJHHH	8 DTTQQ	9 DJHHH	10 DTTQQ	HHHIO II	12 DTTOO	113 DIHHH
•	8			7		
15 DJHHH	16 DTTQQ	17 64RRR	18 50RRR	19 34RRR	20 MXFFF	21 BBBRR
0	0	64	50	34	W X	
23 LEFT	24 FRONT	25 QUAD	i			
26 DJHHH	27 DTTQQ	28 DJHHH	29 DTTQQ	30 DJHHH	31 DTTQQ	32 DIHHH
34 DJHHH	35 DTTQQ	36 64RRR	37 50RRR	38 34RRR	39 MXFFF	40 BBBRR
Ø	6	64	50	34	W X	
42 LEFT RIGHT	REAR	44 QUAD				
45 DJHHH	H	47 DJHHH	48 DTTQQ	49 DJHHH	50 DTTQQ	HHHIO IS
80			4	~		-
53 DJННН	54 DTTQQ	55 64RRR	56 50RRR	57 34 RRR	58 MXFFF	59 BBBRR
Ø	Ø	64	50	34	M X	
61 LEFT RIGHT	62 FRONT	63 QUAD				
1		66 DJHHH	67 DTTQQ	68 DJHHH	69 DTTQQ	TO DJHHH
				3		
72 DJHHH	73 DTTQQ		75 50RRR	76 34RRR	77 MXFFF	78 BBBRR
Remarks	R	64	50	34	XW	
	dd True	in tene of	in lances and	and an disc		
	I I N	t level in hundreds of	feet (absolute altitud	ude below 5500 feet).	n of storm motion).	
CODE	- Gro	indicator designating	the distance from t	center in naut	les (8-80, 4-45, 3-3(0, 1-15, Ø-cente
FIGURES	HHH - Heigh	t of the eyewall in feature height data in RE	cro format			
		5	agrees Celsius. Add	50 for negative values		
		um observed wind sp				
		d range fi	OF MXFFF.		-	
	- Data	re unknown or un	kt winds tr	om the center in nautic	cal miles.	
	1.					

40

VORT SUPPLEMENTARY

	AIRCRAFT NUMB	NUMBER	FLIGHT	METE
PRECEDENCE IMMEDIATE)	IMMEDIATE)			
R AND OBSERVATION NUMBER	ATION NUMB	BER		

*

pp	1	True direction in tens of degrees (pattern orier
222	t	Flight level in hundreds of feet (absolute altit
۵	I	
ччччч	I	Height of the eyewall in feet.
HHH	1	Pressure height data in RECCO format.
TTQQ	I	Temperature/dewpoint in degrees Celsius. Ad
444	I	
BBBRR	1	Bearing and range from the center of MXFFF.
RRR	I	Radial extent of 64 kt, 50 kt, and 34 kt winds
11	1	Data are unknown or unobtainable.

MISSION EVALUATION FORM

DATE:		
TO:	OL-G, HQ AWS/CARCAH	
FROM:	(Director, NHC, CPHC, EPHC)	
SUBJECT:	Mission(Mission Identifier)	Evaluation

PUBLISHED REQUIREMENTS:

Premission Coordinates (As Updated Prior to TKO)_____N

Flight Pattern

Mission Requirements Times_____

RECONNAISSANCE MISSION PERFORMANCE:

 Flight Flown:
 ____Completely
 Partially
 __Other

 Horizontal Data Coverage:
 ___Complete
 ____Timely
 ___Accurate

 Incomplete
 ____Untimely
 ____Accurate

 Vertical Data Coverage:
 ____Complete
 ____Timely
 ____Accurate

 Incomplete
 _____Incomplete
 _____Imely
 _____Accurate

 Incomplete
 ______Incomplete
 ______Inaccurate

	Requirements A		_On Time _Missed	_Early	Late
	Remarks:				
OVE	ERALL MISSION E	VALUATION:			
		Outstanding	Satisfactory	Unsatisfa	ctory
	Equipment:				
	Accuracy:				
	Timeliness:				
	Procedures:				

41

SL

Completeness:

Remarks:

CHAPTER 4 APPENDIX C PAGE 1

AIRCRAFT RECONNAISSANCE COMMUNICATIONS

1. <u>General</u>. USAF and NOAA aircraft will transmit reconnaissance observations using HF single side band radio through the USAF Aeronautical Station complex to the appropriate weather reconnaissance data monitor. Weather monitors will evaluate these reports and disseminate them to either the AWN and Carswell AFB, TX, or the weather communications facility at Suitland, MD.

2. <u>Air Ground Communications</u>. The USAF aeronautical station contacted will depend upon aircraft location and radio propagation conditions. Initial contact radio frequencies are as published in appropriate en-route flight publications. After initial contact, aeronautical stations will provide a discrete frequency for mission use if possible. Aircrew relay of weather reconnaissance data will be by direct phone-patch to the weather monitor. Specific radio procedures and terminology will be described in <u>Allied</u> <u>Communications Publication (ACP)</u> 125. USAF has authorized the use of "Immediate" precedence for transmission of hurricane reconnaissance reports as follows:

PRIMARY

Direct phone-patch between aircraft and Miami Monitor (Atlantic and Eastern Pacific) or Hickam Weather Monitor (Central Pacific) through any aero station.

SECONDARY

Direct phone-patch between aircraft and any weather monitor through any aero station.

#3. <u>Air-to-Air Communications</u>. When more than one reconnaissance aircraft is known to be operating in a particular area of interest, the following frequencies will be used for plane-to-plane communications and coordination:

- a. Primary VHF 123.05 MHz.
- b. Secondary UHF 304.8 MHz
- c. Back-up HF 4701 KHz USB

#4. <u>Aircraft Satellite Data Link (ASDL) equipped aircraft</u>. Aircraft equipped with ASDL (NOAA 41C, NOAA 42RF, NOAA 43RF) have the option to utilize the ASDL system using the following procedures:

a. <u>Data Format</u> - This format will be used for data transmission by the ASDL System.

(1) One Minute Observation - All locations (Message Header) (Date/Time) URNT40 KMIA 291630 (Platform Identifier) (Date/Time-NESS) 15C9419C 23012 3220 (Mission Identifier) NOAA2 0401 ANA OB 02

(TIME) (LATITUDE) (LONGITUDE) (PRESS ALT) (D VALUE) 1233 2803 08037 06173 +0436

42

(WIND) (TEMP) (DP) 213010 <u>+</u>138 <u>+</u>096 NNNN

CHAPTER 4 APPENDIX C PAGE 2

```
(2) RECCO Observation - Atlantic Area
(Message Header) (Date/Time) Same as for 1 minute observation.
(Platform Identifier) (Date/Time-NESS) - Same as for 1 minute
observation.
(Observation Manop Heading) (Date/Time)
URNT11 KMIA 281642
(RECCO text)
97779 12428.....93///
NNNN
```

(3) RECCO Observation - Eastern and Central Pacific - Same as for Atlantic except that observation manop heading is URPN11 KMIA. Note: 11 used for routine tropical cyclone observation 12 used for vortex reports, etc.

#b. <u>Data Transmission Schedule</u> - To facilitate the transmission of data from several aircraft through <u>one</u> circuit, each aircraft will be assigned a specific block of time within the 30-minute interval for transmission of its data using the following schedule:

+5----- +10 0-----+5 RFC RFC RFC 41C 42RF 43RF C130 P-3(A)P - 3(B)+30----- +35 +35-----------------------+40 RADAR RADAR RFC RFC 41C 42RF

		C130	P-3(A)
+40 +45 RFC 43RF P-3(B)	+45+50	+50 +55 RADAR	+55 +60 RADAR

Because only 4 minutes and 28 seconds of each 5-minute time block can be used for data transmission, roughly 1/2 minute is left in each transmission block. This schedule is designed to eliminate diagnostic statements that would appear at the NESS computer if data from specific sources arrived at the computer at unscheduled times.



PHONE

only patch 1279 108 52 6 2 ----9-315 300 3300 767 341 36-341 -1-3430 5-666-46 7-3 5547 1 50 2 -449 437 305-666 350-55 894-115 (phone 8 1 2 8 9 60 305-(1 0 1 0 1 301 415 808 828 894 15 3 ETS. FTS CO FTS 5 CO LH 30 AV AV 2 A

~

(+000-315-430-0111 (ask for 471-305-526-2936 CO AV

-2544 68 8 AV

2586 271-AV

-4540 -377-4540 -4318 -377-4318 8 AV CO CO

680010 0000

E

CHAPTER 4 APPENDIX D

RECONNAISS	CONNAISSANCE ORGANIZATION COMMUNICATION CAPABI	LITIES
	ADDRESS	TELETYPE
Monitor	OL-G, AWS, Coral Gables, FL	ABC
her Monitor	Det 7, 24 WS, Mather AFB, CA	ф
her Monitor	Det 4, 1 WW, Hickam AFB, HI	ß
rricane Center	n	ABC
ational Hurricane Center	WSFO, Washington, DC	A C
ific Hurricane Center	WSFO, Redwood City, CA	U
ific Hurricane Center	WSFO, Honolulu, HI	U
rn Oceanography		
orfolk	NAVEASTOCEANCEN, Norfolk, VA	Д
bor	NAVWESTOCEANCEN, Pearl Harbor, HI	Д
	RFC, Miami, FL	A
	Det 5, AWS, Keesler AFB, MS	
leather Central	AFGWC, Offutt AFB, NE	Д
OAC	CINCLANTFLT OAC, Ronkona, NY	U
	ARTCC, Miami, FL	U
	53 WRS, Keesler AFB, MS	
	920 WRG, Keesler AFB, MS	

Weath Weath Paci Paci Hur Alternate Na N Me Miami #Naval Wester Pearl Harl Easter CINCLANTFLT CARCAH/MIAMI GT7072 COMEDS AWS AF Global Center, AFTN National Central WRG Eastern 2 53 WRS Mather Hickam STATION ARTCC #Naval Det 920 1 1 1 RFC U B P

SATELLITE SURVEILLANCE OF TROPICAL AND SUBTROPICAL CYCLONES

1. <u>Satellite</u>.

a. <u>Geostationary Operational Environmental Satellite (GOES)</u>. The GOES system consists of four satellites, two operational and two standby. The principal GOES products are 1/2-hourly pictures with implanted grids automatically applied to all sectors. During daylight, 1/2-mile, 1-mile, and 2-mile resolution fixed standard sectors are produced, and during the night equivalent 1-mile and 2-mile infrared (IR) standard sectors are produced. Additionally, certain IR pictures will be enhanced at specified times to emphasize various features, and floating sectors at 1/2-, 1-, and 2-mile

resolutions may be produced as desired to augment standard sector coverage. All products are delivered in near real time to Satellite Field Service Stations (SFSSs), to the National Environmental Satellite Service (NESS) Satellite Analysis Branch, and to Weather Service Forecast Offices (WSFOs). (See GOES Operational Data Flow, Appendix A, Attachment 1 to this chapter.)

b. <u>NOAA Polar-Orbiting Satellites</u>. Twice a day, the National Oceanic and Atmospheric Administration (NOAA) polar-orbiting satellite provides global visible and IR pictures (4- and/or 8-kilometer resolution) that are centrally received, processed, and disseminated to appropriate SFSSs and WSFOs via DIFAX (Digital Facsimile Circuit) and, in some instances, the GOES distribution system.

2. Satellite Field Service Stations (SFSS).

a. <u>Support Concept</u>. Under the NESS SFSS support concept, GOES imagery in support of the hurricane warning services is distributed by the Central Data Distribution Facility at Marlow Heights, MD, to the SFSSs in Miami, San Francisco, Honolulu, and Washington. These SFSSs are collocated with NWS hurricane warning offices and are responsible for providing support to them.

b. <u>Station Contact</u>. SFSS satellite meteorologist can be contacted as follows:

(1) Miami - between 0630 - 1630 EDST and 2000 - 0400 EDST at (305) 350-4310 and 4460.

- (2) San Francisco 24 hours a day at (415) 470-9122/9123.
- (3) Honolulu 24 hours a day at (808) 836-2776.
- (4) Washington 24 hours a day at (301) 763-8239.

#c. <u>Satellite Tropical Disturbance Summary</u> - The Miami, San Francisco, and Honolulu SFSS's distribute twice daily at the times indicated (Appendix B, Form 1 to this Chapter) a satellite summary which describes significant weather in the tropical regions of the Atlantic, Eastern Pacific, and Central Pacific (north and south between 140°W to 170°E, respectively).

#3. <u>NESS Satellite Analysis Branch (SAB)</u> - SAB operates 24 hours a day to provide satellite support to the National Meteorological Center (NMC). The SAB also distributes twice daily a "Satellite Tropical Disturbance Summary for the Pacific (West of 170° E) and the Indian Ocean." SAB may be contacted at (301) 763-8444.

4. <u>The Defense Meteorological Satellite Program (DMSP)</u>. DMSP will provide coverage of tropical/subtropical cyclones whenever possible. Data covering the National Hurricane Operations Plan (NHOP) areas of interest will be received centrally at the Air Force Global Weather Center (AFGWC) at Offutt AFB, NE; and locally at direct readout sites at Hickam AFB, HI, and Patrick AFB, FL.

#a. <u>Named Storm Observation</u>. When named storms are observed in these DMSP readouts, and the National Hurricane Center (NHC) determines that coverage from available NESS satellites should be supplemented, teletype bulletins describing the location and intensity classification of the storm will be transmitted in the format shown in Appendix B, Form 2. Units will respond to OL-G, AWS (Air Weather Service) telephonic requests (confirmation messages will be transmitted). Procedures are:

(1) Hickam readout will provide data directly to the Central Pacific Hurricane Center (CPHC).


(2) Patrick readout will provide data in its area of the Caribbean south of $30^{\circ}N$ and west of $60^{\circ}W$.

(3) AFGWC will provide data in the NHOP area of responsibility not covered by the Hickam or Patrick readouts.

b. Disturbances. When disturbances are present that have not been clas-

sified as named storms and Department of Commerce (DOC) requires additional satellite analysis of the area, OL-G AWS will call the appropriate DMSP location to receive telcon information on the disturbance.

5. <u>Satellites and Satellite Data Availability for the 1980 Hurricane Season</u>. Appendix A, Attachment 2 of this chapter lists satellite capabilities for the 1980 hurricane season.

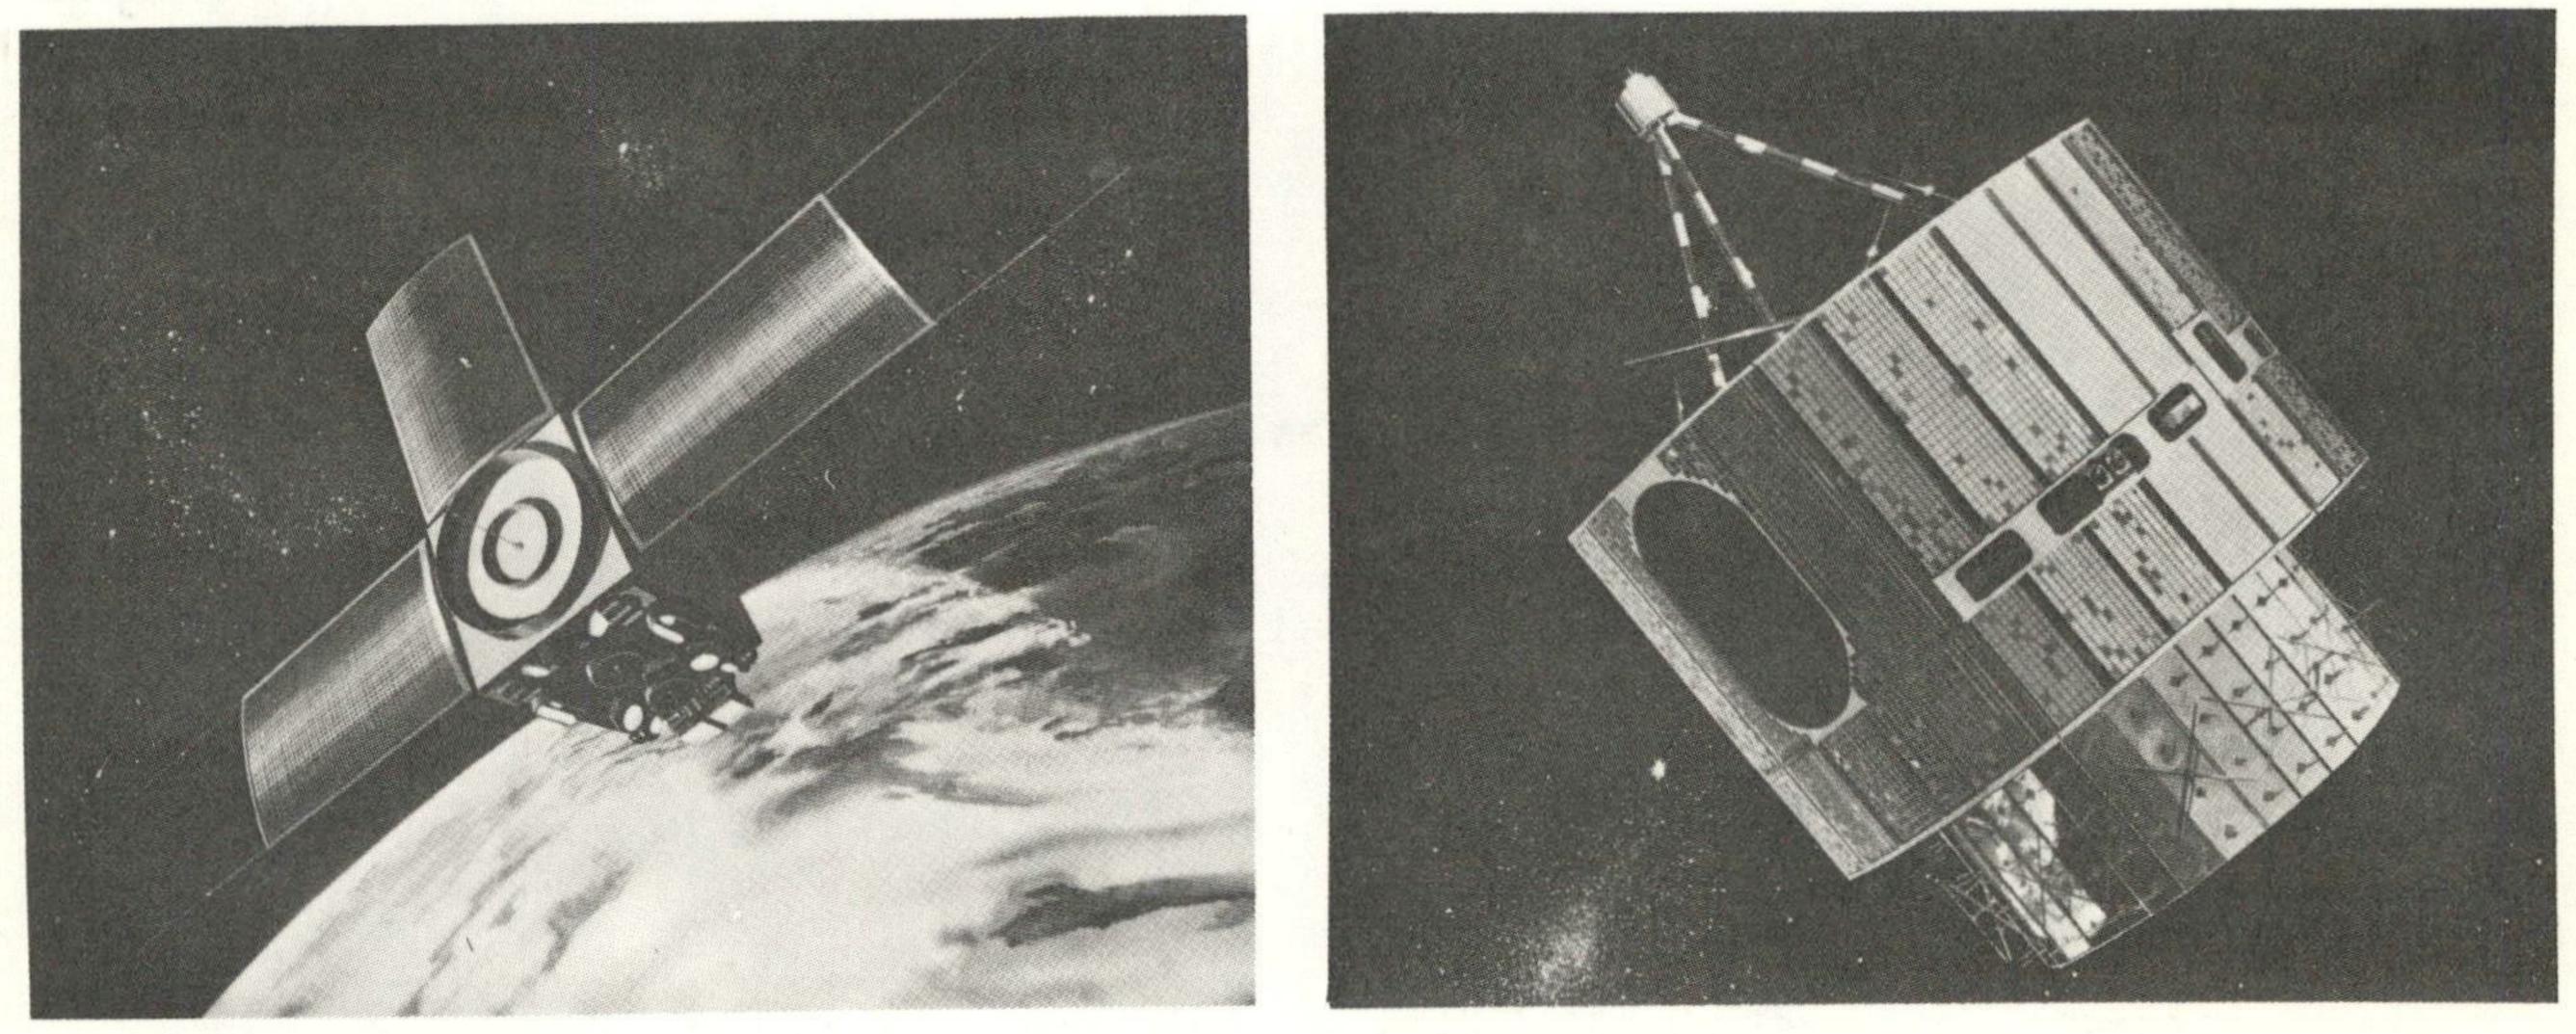

46


NOAA-Sun-Synchronous, Polar-Orbiting Satellite.

SMS/GOES—Earth-Synchronous Satellite.

CHAPTER 5 APPENDIX A ATTACHMENT 1

GOES OPERATIONAL DATA FLOW

and the second of the second second

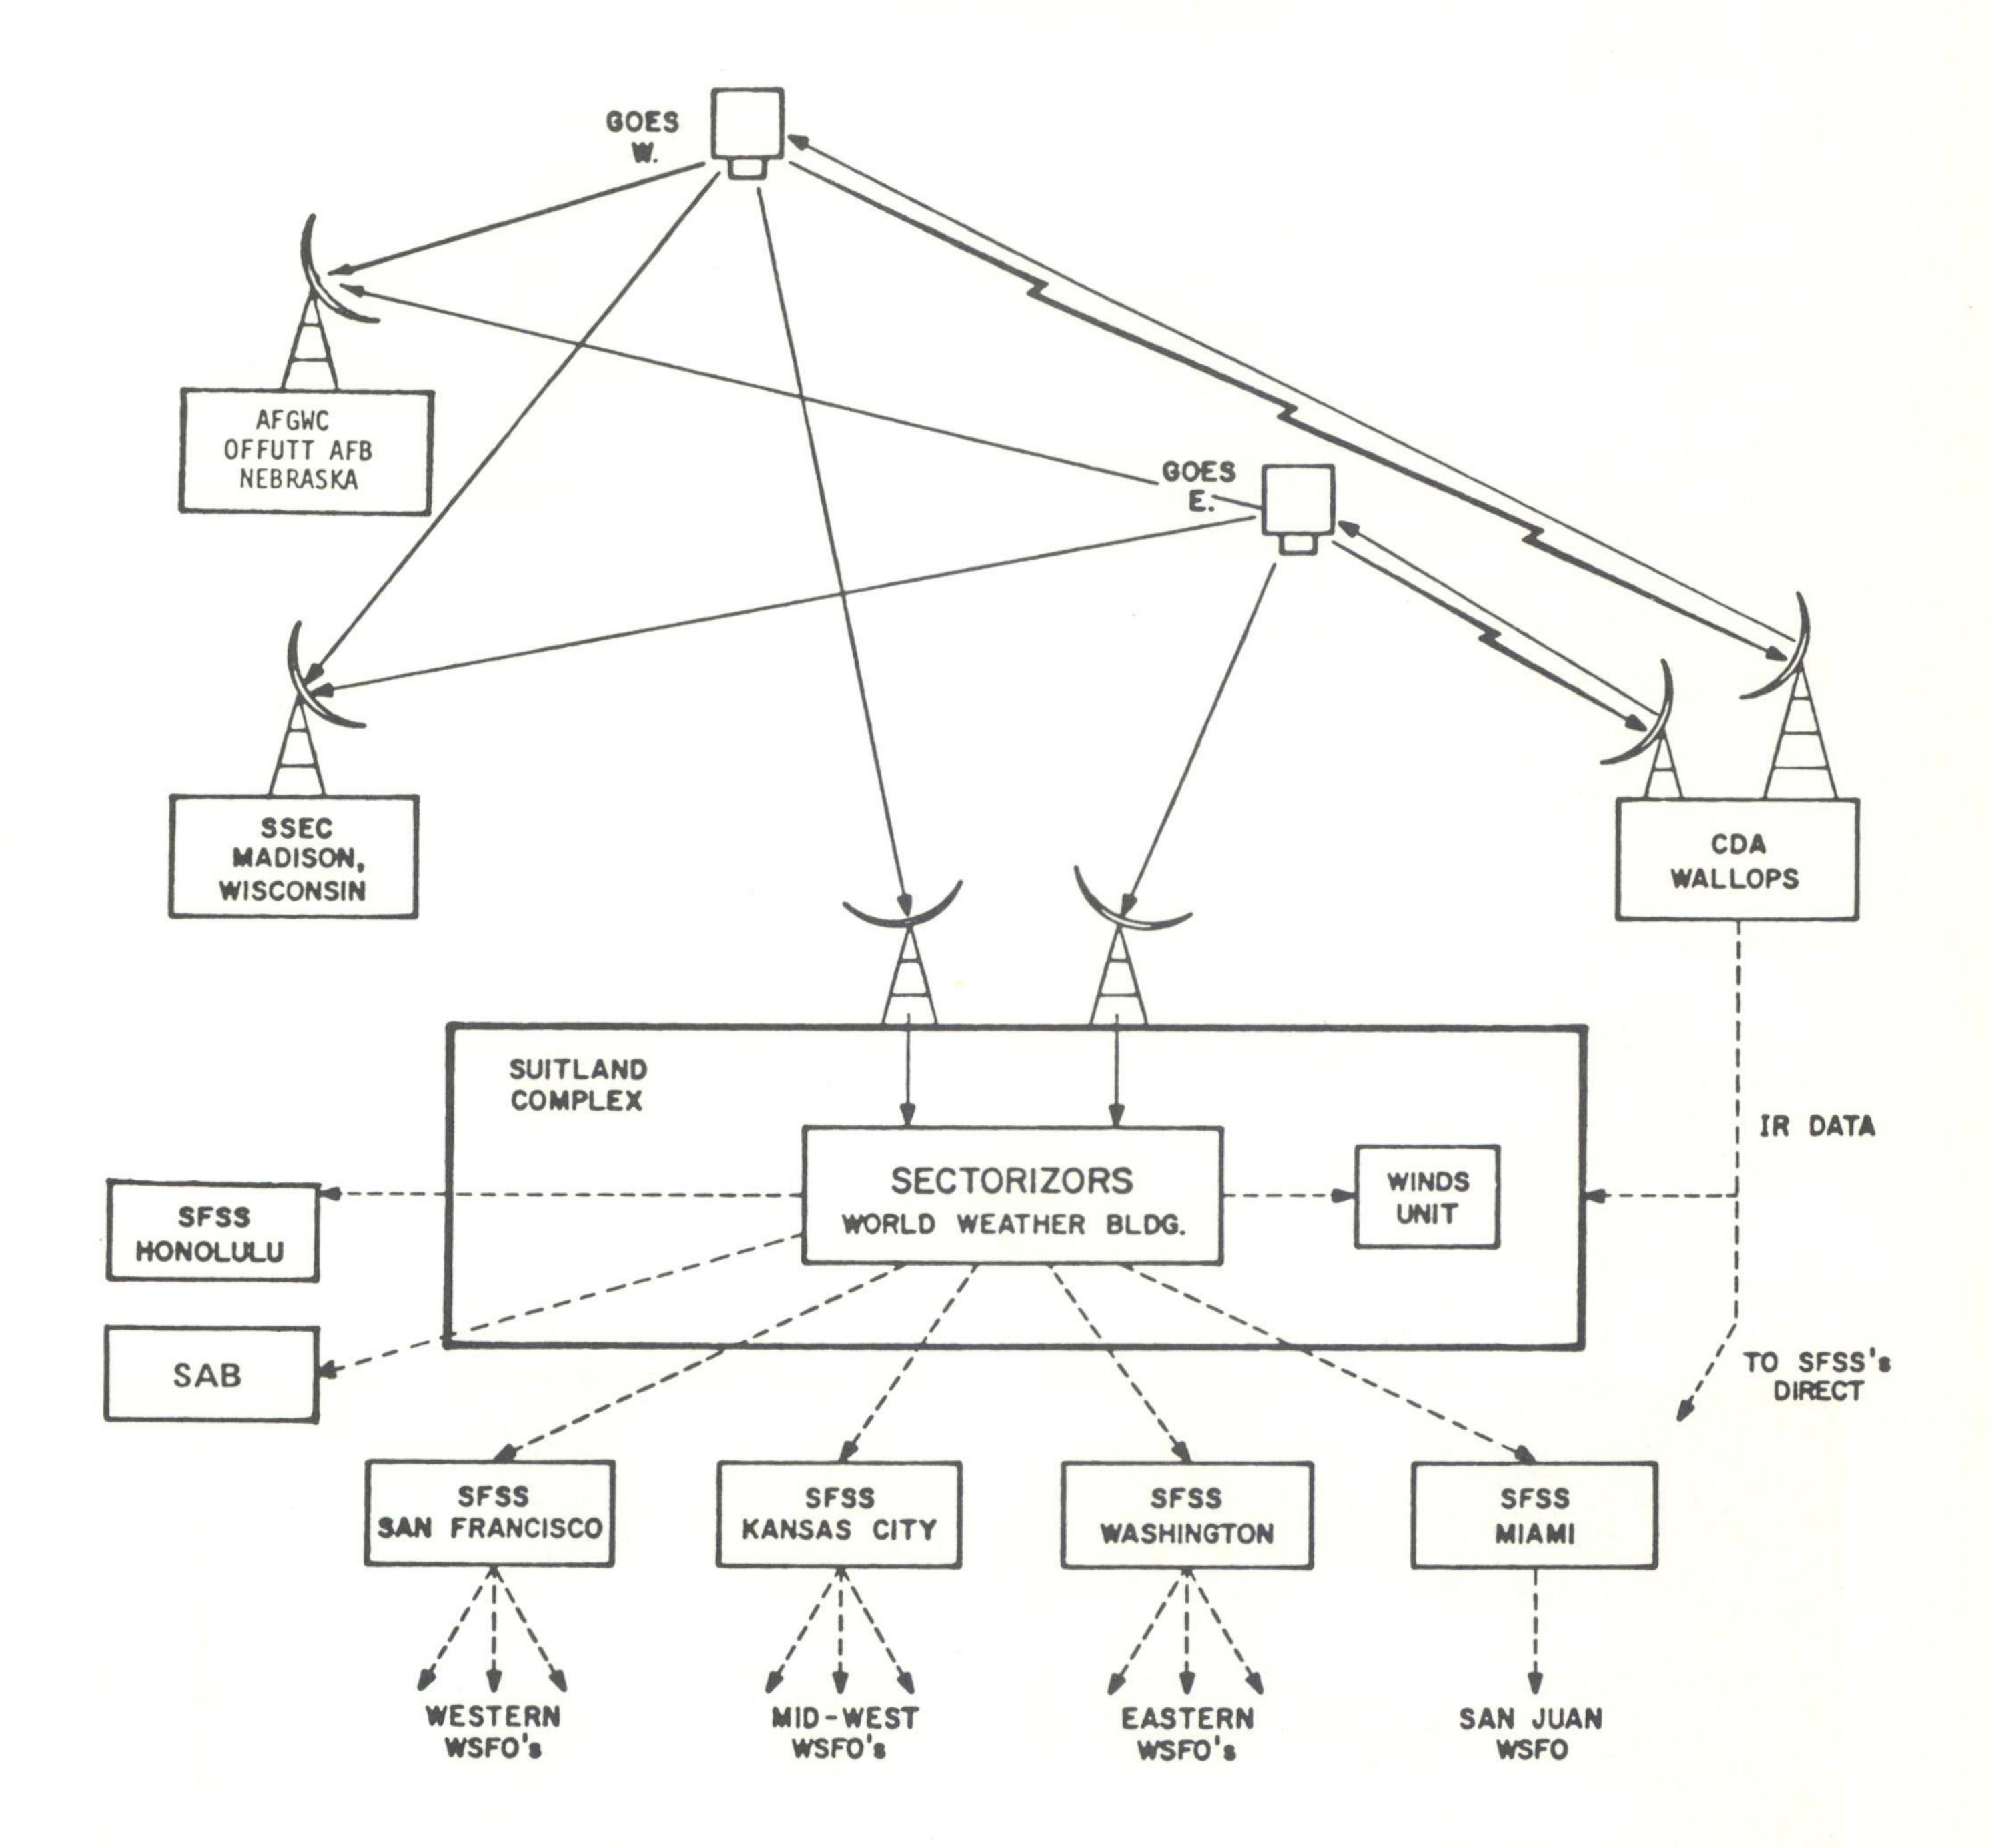

NOTE: Anchorage SFSS is in the GOES Operational Data Flow, but primarily uses the NOAA Polar-Orbiting Satellite data.

CHAPTER 5 APPENDIX A ATTACHMENT 2

> resolution • Midwest for standard sectors States, 2-mi visible on visible ited State daylight). tandard se and • ight) ۰ ery î ٠ . 0

imagery) oud cover lysis

ypes) only)

nmi nmi) nmi) nmi 5 nmi) adiometer 0.3 diometer 1.5 n Radiometer 1. Radiometer 0.3 hing Radiometer 1 ng Radiometer 1 Scanning Rad red Scanning ing

Z

()	
0	
rOI	
V 4	
SE	
- 01	
r/n	
V 4	
1	
100	
[7]	
A	
r 31	
B	
JRR	
اسلم	
-	
0	
passed 1	
terms 1	
Property is	
اسليع	
1	
\mathbf{C}	
0	
\sim	
<i>w</i>	
98	
n	
-	
_	
1	
1	
~	
æ	
H	
R	
OR	
OR	
FOR	
Y FOR	
Y FOR	
LY FOR	
TY FOR	
TY FOR	
ITY FOR	
ITY FOR	
LITY FOR	
LITY FOR	
LLITY FOR	
ILITY FOR	
SILITY FOR	
BILITY FOR	
BILITY FOR	
ABILITY FOR	
ABILITY FOR	
ABILITY FOR	
ABILITY FOR	
LABILITY FOR	
LABILITY FOR	
ILABILITY FOR	
ILABILITY FOR	
AILABILITY FOR	
AILABILITY FOR	
AILABILITY FOR	
VAILABILITY FOR	
VAILABILITY FOR	
AVAILABILITY FOR	
AVAILABILITY FOR	
AVAILABILITY FOR	
AVAILABILITY FOR	
AVAILABILITY FOR	
AVAILABILITY FOR	
A AVAILABILITY FOR	
A AVAILABILITY FOR	
TA AVAILABILITY FOR	
TA AVAILABILITY FOR	
TA AVAILABILITY FOR	
ATA AVAILABILITY FOR	

S AND SATELLITE DA	Local Time	Every 30 minut (24 hr/day) (Limited scan short-interval viewing availa	1500/0300	0730/1930	0700/1900	d reduced Processing) high resolution ounder smission (1.1 km) n (4 km) on Radiometer Radiometer
SATELLITES	Type of Data	5.0 ⁰ W VISSR standby)	GAC & LAC	(stored) APT (direct) TOVS AVHRR	LF/TF LS/TS	rea Coverage (recorded reduce tion data for Central Process ea Coverage (recorded high re limited amount) perational Vertical Sounder solution Picture Transmission (4 km) c Picture Transmission (4 km) ed Very High Resolution Radio e-Infrared Spin Scan Radiomet

SAMPLE OF SATELLITE TROPICAL DISTURBANCE SUMMARY

ABXX 11 KSFO 210800Z *ABXX() KWBC, KSFO, KMIA, PHNL SATELLITE TROPICAL DISTURBANCE SUMMARY ALL MOVEMENTS AND TRENDS 24 HOURS UNLESS OTHERWISE STATED

EAST PACIFIC	GOES WEST IR NITE	210745
(OCEANIC AREA)	(SATELLITE & SENSOR(S)	(PREPARATION

(Location) (Time) (Satellite Code)

(Name and/or No.)

TIME)

TROPICAL STORM SUSAN. SEE LATEST EPHC ADVISORY.

ITC 2 TO 4 DEGS WIDE XTNDG FM 6N 80W TO 11N 116W IS BRKN TO OCNLY OVC WITH HVST ACTIVITY ARND 11N 116W. SCTD ACTV ITC FM 9N 116W TO 12N 134W 2 DEG WIDE WAS BKN YDA. BRKN TO OVC AREA 3 TO 5 DEG IN DIA IS MDTLY ACTC CNTRD NEAR 11N 116W HAS MVD W 5 DEG WITH LTL CHG.

ATLANTICGOES EAST IR NITE210630Z(OCEANIC AREA)(SATELLITE AND SENSOR(S))(PREPARATION TIME)

(Location) (Time)

(Satellite Code)

(Name and/or No.)

NO TROPICAL CYCLONES OBSERVED

I'	<u>rc 3 7</u>	01	5 DEG	WIDE FM 10N 20W	TO 14N 50W IS MSTLY BRKN	AND MDTLY ACTV WITH LTL
CH	IG BE	RKN	ACTV	ITC FM 14N 50W TO	O 17N 57W 4 DEG WIDE HAS	INCREASED IN WIDTH
/-						
()	leadir	1g)		(TIME)	(OCEANIC AREA)	(TYPE OF DATA)
#	ABXX	11	KMIA	0700Z	Atlantic/Caribbean	IR/NITE
#	ABXX	15	KMIA	1900Z	Atlantic/Caribbeen	VIS/IR
#	ABXX	11	KSFO	0800Z	Eastern Pacific	IR/NITE
#	ABXX	15	KSFO	2000Z	Eastern Pacific	VIS/IR
#	ABXX	11	PHNL	1000Z	Central Pacific	
					(N&S 140W-170E)	IR NITE
<i>‡</i> ‡	ABXX	15	PHNL	2200Z	Central Pacific	
					(N&S 140W-170E)	
	ABXX	12	KWBC	1100Z	Indian Ocean	VIS/IR
	ABXX	13	KWBC	0500Z	Western Pacific	
					N&S W of 170°E)	VIS
	ABXX	14	KWBC	2300Z	Indian Ocean	VIS/IR
	ABXX	15	KWBC	1900Z	Western Pacific	
					(N&S W of 170°E)	IR NITE

Whenever a tropical system is located in these areas, Part 1 will carry the following statement: <u>See latest (NHC, EPHC, or CPHC) advisory(ies)</u>.

CENTER FIX DATA FORM AND MESSAGE FORMAT (SATELLITE)

MESSAGE HEADING: TPNT CCCC		
A CYCLONE DESIGNATOR	Α.	Designator of tropical cyclone category including name/number. When a cloud system has not yet been designated by name/number enter TROPICAL DISTURBANCE. Sample entry: TROPICAL STORM AMY (15)
B DATE/TIME (Z) OF FIX	в.	Date and nodal crossing time in Zulu; round time to nearest minute. Sample entry: 252303Z
C LATITUDE OF POSITION	C.	Latitude to nearest tenth of degree (N or S), followed by checksum. Sample entry: 29.9N/O
D LONGITUDE OF POSITION	D.	Longitude to nearest tenth of degree followed by checksum. Sample entry: 56.7 W/8
E POSITION CODE NUMBER	E.	Enter Position Code number (PCN) and source of data (DMSP, NOAA 2, etc.). Spell out PCN number. Select PCN number from code below:
		GEOGRAPHICAL GRIDDINGEPHEMERIS GRIDDINGONE:eye fixTWO: eye fixTHREE:well definedFOUR: well definedcirculationcirculationcirculation

 circulation
 circulation

 center
 center

 FIVE:
 poorly defined
 SIX:

 circulation
 defined

 center
 circulation

 Sample entry:
 ONE/DMSP

 F.
 Dvorak classification for storm intensity as

 described in NOAA technical Memorandum NESS 45

50

F DVORAK CLASSIFICATION F. D a

described in NOAA technical Memorandum NESS 45 and IWWP 105-10. Dvorak classification will be made once each day and must be based on visual data. If a new Dvorak classification number cannot be derived, use the last reported number. Include in parenthesis the date and nodal time of the data on which the Dvorak analysis is based.

Sample entry: T 4.5/4.5/D1.0/25HRS (252305Z)

REMARKS

G

G. Include information, as appropriate, on data type, eye characteristics, spiral rainbands, unexpected changes in storm movement, departures from Dvorak (modelled) intensities, etc.

SURFACE RADAR REPORTING

1. <u>General</u>. Radar observations of tropical cyclones will be made at Department of Defense (DOD), National Weather Service (NWS), and Federal Aviation Administration (FAA) radar facilities and at other cooperating radar facilities according to established agreements with NWS.

2. Procedures

a. Radar observation of tropical cyclones will be made in accordance with the Federal Meteorological Handbook (FMH) #7, Part A, Weather Radar Observations. Stations that normally transmit hourly radar weather observations (network stations) will include tropical cyclone features in routine reports (H+35) and will make and transmit special observations at H+10 whenever an eye or center is observed. It is highly desirable for stations that do not normally transmit hourly reports (WSR-74C's) to make and transmit a radar observation whenever an eye, center, or spiral band is observed. The WSR-74C's may transmit only abbreviated special observations, defined in FMH-7, at H+35 and H+10.

b. If the central region of a storm is defined by an identifiable wall cloud; the radar fix is reported as an EYE. If the central region is recognizable, but not well defined by a wall cloud, it is reported as a CENTER. When the EYE or CENTER is only occasionally recognizable or some other central region uncertainty exists, the EYE or CENTER is reported as PSBL EYE or PSBL CENTER. Remarks stating degree of confidence will be included with EYE fixes only and will be classified as either GOOD, FAIR, or POOR. A GOOD fix is reported when the EYE is symmetrical - virtually surrounded by wall cloud; a POOR fix is reported when the EYE is asymmetrical - less than 50 percent surrounded by wall cloud; a FAIR fix is reported to express a degree

of confidence between GOOD and POOR.

c. Timely transmission of tropical cyclone radar reports is essential. Normally, radar reports are transmitted on Radar Report and Warning Coordination Circuit (RAWARC), GT 7072, or Conus Meteorological Data System (COMEDS) circuit equipment. Those radar facilities not having weather transmission capability may call the nearest Weather Service Office (WSO) collect.

3. Special Provisions

a. If NWS Weather Surveillance Radar (WSR) 57 and DOD weather radar facilities are collocated (within 25 nautical miles), the NWS radar will have the primary responsibility for making and transmitting tropical cyclone radar reports - DOD will provide backup service. If a radar facility is less powerful than the WSR 57 and is collocated with an Aerospace Defense Command (ADCOM) radar facility, the ADCOM radar facility will have the primary responsibility for making and transmitting tropical cyclone radar reports provided it is manned by a qualified weather radar operator, the less powerful radar facility will provide backup service. Any backup radar facility, however, may transmit radar reports as desired.

b. If radar reports are needed from ADCOM facilities or Air Route Traffic Control Centers (ARTCCs), NWS will dispatch weather radar specialists to these facilities to make and transmit tropical cyclone radar observations. DOD and

FAA have authorized the Director, NWS, to dispatch NWS radar specialists to ARTCCs and ADCOM sites during critical hurricane threat situations to make and transmit hurricane radar observations. Specific procedures regarding notification, access to sites, clearances, etc., as agreed to by DOD and NWS will be the responsibility of the Public Services Branch, Meteorological Services Division, NWS Headquarters, and will be strictly adhered to.

c. Staff weather officers providing support to ADCOM units act as coordinators for visits. These coordinators are: 20th North American Air Defense Command Regional Control Center (NRCC), Commander Det. 41, 12 Weather Sq., Ft. Lee, AFS, VA (804) 732-7256, ext. 765); 21 NRC, Commander Det. 27, 12 Weather Sq., Hancock Field, Syracuse, NY (315) 458-5500, ext. 3535); 326 Air Division, Det. 4, 1WW, Hickam AFB, HI (AV 315-449-6262). Sites are listed in Appendix A of this chapter.

d. Appendix B lists FAA ARTCCs that may be visited.

4. Procedures for Detailing National Weather Service Radar Meteorologists to the FAA's ARTCCs.

a. NWS has been authorizd by FAA to send NWS radar meteorologists to ARTCCs during the hurricane season. These meteorologists will make, record, and transmit hurricane radar observations as well as act as focal points to solicit and process pilot reports from the hurricane areas.

b. Owing to the limited facilities at ARTCCs, NWS agrees that no more than two persons will visit a Center at any given time. Each visit will normally be short, 1 or 2 days, but will depend upon the progress of the hurricane under observation.

(1) NWS must notify the appropriate FAA facility coordinator by wire of the intent of weather service personnel to visit such a facility. This may be done by telephone in an emergency. Notification will normally be handled by the responsible NWS Regional Office or the Public Services Branch, Silver Spring, MD. This notification will include the name(s) of the individuals, site to be visited, and inclusive date(s) of visit.

(2) The permission to visit must be on file at the FAA facilities included in Appendix B. It will be the responsibility of the Public Services Branch, Meteorological Services Division (MSD), NWS Headquarters, Silver Spring, MD, to coordinate additions, changes, and/or deletions in the list of their personnel with the FAA facilities to be visited 2 weeks in advance of effective date of change. Coordinating correspondence should refer to this document.

Positive identification must be presented for access to FAA (3)facilities.

(4) Only those personnel who have been identified by wire will be admitted to FAA facilities.

> NWS annually will update the list of personnel. (5)

Copies of this plan shall be forwarded to appropriate ARTCCs. (6)

CHAPTER 6 APPENDIX A

PARTICIPATING RADAR STATIONS

Radar

National Weather Service

Apalachicola, FL Atlantic City, NJ Baton Rouge, LA Brownsville, TX Brunswick, ME Cape Hatteras, NC Charleston, SC Chatham, MA Davtona Beach, FL.

WSR-57 WSR-57 WR-100-5 WSR-57	29°44'N 39°27'N 30°32'N 25°54'N 43°54'N 35°16'N 32°54'N 41°39'N 29°11'N 29°18'N 32°19'N 29°18'N 32°19'N 29°18'N 32°19'N 24°33'N 30°07'N 25°43'N 30°07'N 25°43'N 30°07'N 30°21'N 30°21'N 30°17'N 30°17'N 30°17'N 30°17'N 30°17'N 30°17'N 30°17'N	84°59'W 74°35'W 91°09'W 97°26'W 69°56'W 75°33'W 80°02'W 69°57'W 81°03'W 94°48'W 90°05'W 81°45'W 93°13'W 93°13'W 80°17'W 73°59'W 73°59'W 73°59'W 73°59'W 73°59'W 73°59'W 73°59'W 73°59'W 73°59'W 87°19'W 82°24'W
WSR-57	34°16'N	77°55'W

Latitude

Daycona Deach, IL
Galveston, TX
Jackson, MS
Key West, FL
Lake Charles, LA
Miami, FL
New York, NY
Patuxent, MD
Pensacola, FL
San Juan, PR
Slidell, LA
Tampa, FL
Victoria, TX
Volens, VA
Waycross, GA
Wilmington, NC

Longitude

Department of Defense

Andrews AFB, MD Barksdale AFB, LA Bermuda NAS Cape Canaveral AFS, FL Chase Field NAS, Beeville, TX Cherry Point MCAS, NC Corpus Christi NAS, TX Eglin AFB, FL Homestead AFB, FL Howard AFB, CZ Jacksonville NAS, FL Keesler AFB, MS MacDill AFB, FL McGuire AFB, NJ New Orleans NAS, LA Norfolk NAVEASTOCEANCEN, VA Pope AFB, NC Randolph AFB, TX Robins AFB, GA Seymour Johnson AFB, NC Sudbury, MA

FPS-77FPS-77FPS-106 FPS-77FPS-106 FPS-106 FPS-106 FPS-77 FPS-77FPS-77 FPS-106 FPS-77**FPS-77 FPS-77** FPS-81FPS-106 CPS-9

38°48'N 32°30'N 32°22'N 28°28'N 28°22'N 34°54'N 27°42'N 30°29'N 25°29'N 08°77'N 30°14'N 30°24'N 27°51'N 40°00'N 29°50'N 36°56'N 35°12'N 29°32'N 32°38'N 35°20'N

76°53'W 93°40'W 64°41'W 80°33'W 97°40'W 76°53'W 97°16'W 86°31'W 80°23'W 79°36'W 81°41'W 88°55'W 82°30'W 74°36'W 90°01'W 76°18'W 79°01'W 98°17'W



83°36'W 77°58'W 42°25'N 71°29'W

*FAA-U.S. Navy joint-use radar.

CHAPTER 6 APPENDIX A (continued)

ADCOM Sites

20 NORAD Region Control Center (20th NRCC)

632 Radar Sq., Roanoke Rapids AFB, NC
**645 Radar Sq., Patrick AFB, FL
**660 Radar Sq., MacDill AFB, FL
671 Radar Sq., Key West AFS, FL
**678 Radar Sq., Tyndall AFB, FL
**679 Radar Sq., Jacksonville AFS, FL
701 Radar Sq., Ft. Fischer AFS, NC
702 Radar Sq., Hunter AAF, GA
770 Radar Sq., Ft. George G. Meade RSI, MD
**771 Radar Sq., North Chalreston AFS, SC

Latitude	Longitude
36°27'N	77°44'W
28°13'N	80°36'W
27°50'N	82°28'W
24°35'N	81°41'W
30°05'N	85°37'W
30 13'N	81°41'W
33050 IN	7705511

21 NORAD Region Control Center (21st NRCC)

762 Radar Sq., North Truro AFS, MA 772 Radar Sq., Gibbsboro, NJ 773 Radar Sq., Montauk AFS, NY **907 Radar Sq., Bucks Harbor AFS, ME

**Remoted in the FAA ARTCC

Cooperating Sites

Bay St. Louis, MS (NASA)

33 59'N $32^{0}01'N$ $39^{0}07'N$ $37^{0}08'N$ $32^{0}54'N$ $32^{0}54'N$ $77^{0}55'W$ $81^{0}10'W$ $76^{0}44'W$ $75^{0}57'W$ $80^{0}01'W$

 42°02'N
 70°03'W

 39°49'N
 74°57'W

 41°04'N
 71°52'W

 44°38'N
 67°24'W

 $30^{\circ}42'N$ $89^{\circ}07'W$ $42^{\circ}42'N$ $71^{\circ}06'W$

Cambridge, MA		CPS-9	42°42'N	71°06'W
(Massachusetts	Institute of	and		
Technology)		M-33		_
College Station,	TX	CPS-9	30°37'N	96°21'W
(Texas A. & M.	University)			
Coral Gables, FL		SP-1M	25°43'N	80°17'W
(University of	Miami)	and		
		CPS-68		
Wallops Station,	VA (NASA)	MPS-19	37°50'N	75°29'W
		SPS-12	37°56'N	75°28'W
		FPS-16	37°50'N	75°29'W
		FPQ-6	37°52'N	75°31'W

Radar used depends upon the location of the hurricane; the one in use will be properly identified.

CPS-9



CHAPTER 6 APPENDIX B

ADCOM and FAA Sites Remoted to ARTCC's

FAAARTCCs	FAA Radar Sites	Military Radar Sites
New York ARTCC (Islip NY) L.I. MacArthur Airport Ronkonkoma, LI, NY 11779 COM: 516-663-3401	New York, NY Trevose, PA Benton, PA	648 Radar Sq., Benton AFS, PA

Boston ARTCC Federal Aviation Admin. Air Route Traffic Control Center Northeastern Blvd. & Harris Rd. Nashua, NH 03060 COM: 603-889-1171 x633 FTS: 8-834-6633

FTS: 8-737-3401

Boston, MA Bucks Harbor, ME Saratoga Springs, NY 907 Radar Sq.,

Miami ARTCC^{*} 7500 N.W. 58th St. Miami, FL 33166 COM: 305-592-9770 FTS: 8-350-2678 Bucks Harbor AFS, ME

MacDill, FL Patrick, FL Richmond, FL 644 Radar Sq., Richmond AFS, FL 645 Radar Sq., Patrick AFB, FL 660 Radar Sq., MacDill AFB, FL

Jacksonville ARTCC P.O. Box 98 Hilliard, FL 32046 COM: 904-845-3311 (Hilliard) 904-791-2581 (Jacksonville) FTS: 8-946-2581 Houston ARTCC P. O. Box 60308 Houston, TX 77205 COM: 713-443-8545 FTS: 8-521-3070 Oakland ARTCC Jacksonville, FL Charleston, SC Tyndall, FL Valdosta, GA Jedburg, SC 678 Radar Sq., Tyndall AFB, FL

Jacksonville AFS, FL


679 Radar Sq.,

861 Radar Sq.,

Aiken AFS, SC

5125 Central Ave. Fremont, CA 94536 COM: 415-797-3200 Alexandria, LA Ellington, TX Lackland, TX New Orleans, LA Oilton, TX

Fallon, NV Oakland, CA Paso Robles, CA Red Bluff, CA 858 Radar Sq., Navy Aux. Air Sta., Fallon, NV



Sacramento, CA

CHAPTER 6 APPENDIX B (Continued)

FAA--ARTCCS

Los Angeles ARTCC 2555 E. Ave. Palmdale, CA 93550 COM: 805-947-4101 x201 FTS: 8-799-1011

FAA Radar Sites


San Pedro, CA Boron, CA Cedar City, UT Las Vegas, NV Mt. Laguna, CA Paso Robles, CA

Military Radar Sites

670 Radar Sq., Ft. MacArthur, CA 750 Radar Sq., Boron AFS, CA 751 Radar Sq., Mt. Laguna AFS, CA

Washington ARTCC Intersection Rts. 7 and 654 Leesburg, VA 22075 COM: 703-777-4400 FTS: 8-925-4400

Binns Hall, VA Raleigh (Benson), NC Washington, (Suitland), DC Roanoke (Bedford), VA

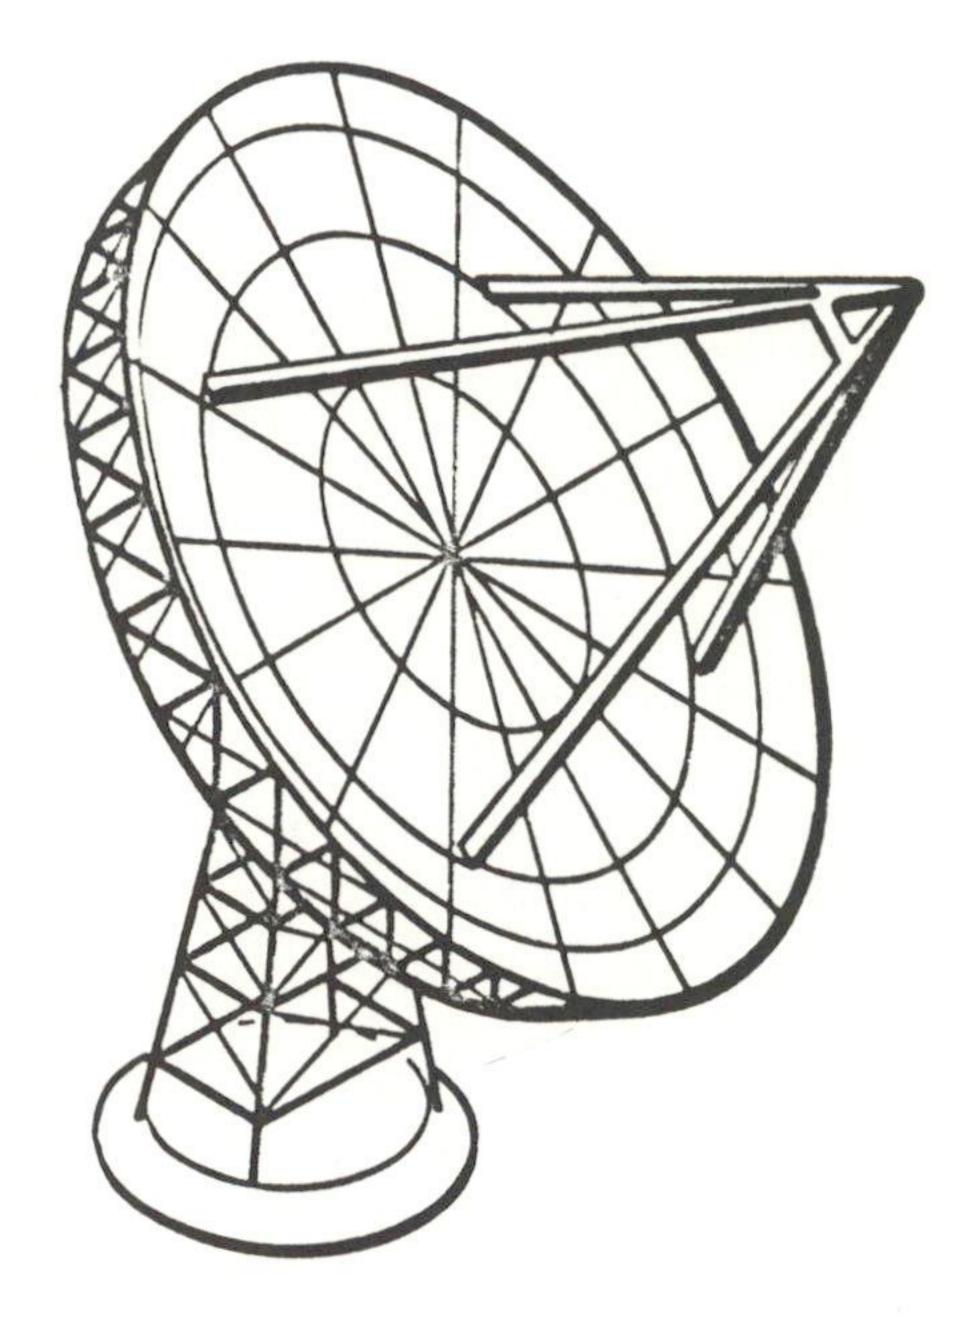



#ENVIRONMENTAL DATA BUOY REPORTING

1. <u>General</u>. Environmental data buoys in the Gulf of Mexico and Great Lakes, and off the U.S. east and west coasts obtain data on meteorological and oceaonographic parameters for operational and research purposes. Data buoy location and configuration are given in paragraph 4. The status and capability of data buoys can be obtained from the Systems Evaluation Division, NOAA Data Buoy Office (NDBO), NSTL Station, MS 39529, telephone (601) 688-2836, FTS 494-2836.

2. <u>Procedures</u>. Environmental data buoys routinely acquire, store, and transmit data once every 3 hours. Data obtained operationally include sea-level pressure, wind direction and speed, air temperature, sea-surface temperature, and wave height spectral data. Hourly data acquisition and reporting may be requested by contacting NDBO Operations at (601) 688-2372/2834/2839 (FTS 494-2372/2834/2839) during normal working hours. At night or during weekends and holidays, the NDBO answering service (601-863-2433) will contact the appropriate NDBO representative. Hourly data are normally available within 3 hours of time of request.

3. <u>Communications</u>. Buoy data are transmitted by UHF communications via the GOES satellite to NESS and then are relayed on to NMC, Suitland, MD, for processing and dissemination. Data are formatted into WMO FM24V synoptic code. (See Attachment 1.)

- 4. NOAA Data Buoy Locations and Configurations
 - A. Gulf of Mexico

Β.

Station TD

Ination

Buoy

Sensor

	Station ID	Location	Size	Height
	42001 42002 42003 42005* 42006*	25.9/89.7 26.0/93.5 26.0/86.0 30.0/85.9 26.5/96.0	10 m 10 m 6 m 12 m 6 m	10 m 10 m 5 m 5 m
i.	<u>Atlantic Ocean</u>			
	<u>Station ID</u>	Location	Buoy Size	Sensor <u>Height</u>
	41001 41002 41003* 41004* 41005*	34.7/72.3 32.3/75.3 30.3/80.4 32.6/78.7 31.7/79.7	12 m 10 m 6 m 5 m 6 m	10 m 10 m 5 m 5 m
	LL002*	40 1/73 0	6 m	5 m

44002*	40.1/13.0	m o	5 m
44003	40.8/68.5	6 m	5 m
44004	39.0/70.0	12 m	10 m
44005	42.7/68.3	12 m	10 m

*Temporary sites established in support of other programs.

CHAPTER 7 ATTACHMENT 1

CODE FORM FM 24-V

Report of synoptic surface observation from a sea station (AUTOMATIC weather station)

M.M.M.M

YYGGiu DsvsLaLa QLLLLL stRNV⁺h

Oddff $lw^{\dagger}w^{\dagger}WW = 2s_nTTT (3s_n^{T}d^{T}d^{T}d)$

5PPPP $(6a^{\dagger}p_{v}p_{v}p_{v})$ $(7RRRT_{R})$ $(8N_{h}C_{L}C_{M}C_{H})$

$(P_W P_W d_w d_w)) = A_1 b_w n_b n_b$

This is the entire code form, including groups not included in U.S. EDB reports. The numbers of the code tables are the numbers given in the WMO Manual on Codes.



MARINE WEATHER BROADCASTS

1. <u>General</u>. The Department of Defense (DOD) and Department of Transportation (DOT) are responsible for broadcasting marine tropical cyclone advisories issued by the National Hurricane Center. Appendix A of this chapter lists the stations involved.

The broadcasts are for the purpose of providing warnings to meet U.S. international obligations in Department of Commerce (DOC) areas of forecast responsibility given in Chapter 2.

2. <u>Broadcast Procedures</u>. DOT and DOD will arrange for broadcast of all marine tropical cyclone advices immediately upon receipt. The latest tropical cyclone forecast will be transmitted according to the schedule and on the frequencies given in <u>Worldwide Marine Weather Broadcasts</u>. The latest position estimate will be used by DOT and DOD along with the latest forecast for storms on which position estimates are being issued. These broadcasts will be made in both voice and cw mode.



CHAPTER 8 APPENDIX A

List of Marine Tropical Cyclone Forecast

Broadcast Stations

Station Call Letters

Location


NMW

Astoria, OR

NMF

Boston, MA

NMO	Honolulu, HI
NMQ	Long Beach, CA
NMA	Miami, FL
NMG	New Orleans, LA
NAM	Norfolk, VA
NMN	Portsmouth, VA
NMC	San Francisco, CA
NMR	San Juan, PR



WARNING TRANSFER POLICIES

1. Transfer of Warning Responsibility.

a. When a tropical/subtropical cyclone approaches longitude 140°W, the coordinated transfer of warning responsibility from Eastern Pacific Hurricane Center (EPHC) to Central Pacific Hurricane Center (CPHC) will be made and appropriate advice issued.

b. When a tropical/subtropical cyclone crosses the 180° meridian from east to west, the coordinated transfer of warning responsibility from CPHC to

Joint Typhoon Warning Center (JTWC) will be made and appropriate advice issued.

c. When a tropical/subtropical cyclone crosses the 180° meridian from west to east, the coordinated transfer of warning responsibility from JTWC to CPHC will be made. JTWC will append the statement "Next advisory by CPHC-HNL" to their last advisory.

2. Alternate Responsibilities.

a. In the event of impending or actual operational failure of a hurricane forecast center, responsibilities will be transferred to the appropriate alternate facility in accordance with existing directives and retained there until resumption of responsibility is made. Naval Eastern Oceanography Center, Norfolk, will be advised of impending or actual National Hurricane Center (NHC) and Chief, Aerial Reconnaissance Coordination, All Hurricanes (CARCAH) transfer of responsibility by the most rapid means available.

b. Alternate facilities are as follows:

PRIM	ARY	ALTERNATE
(1)	NHC	HWO (Hurricane Warning Office): Washington (covers Atlantic only) New Orleans (covers Gulf only)
(2) ∦(3)	EPHC CPHC	New OFTEARS (COVERS Gull Only) NHC NAVWESTOCEANCEN Pearl Harbor (The EPHC will backup the CPHC if the CPHC and NAVWESTOCEANCEN are incapacited simultaneously.)
#(4) (5)	JTWC HWO San Juan	AJTWC, NAVWESTOCEANCEN, Pearl Harbor NHC

#c. In the event of the operational failure of CARCAH, direct communication is authorized between DET. 5, AWS, and the forecast facility. Contact Detachment 5, AWS, at AV 868-2544/CO 601-377-2544.





PUBLICITY

News media releases, other than warnings and/or advisories for the purpose of informing the public of the operational and research activities of DOD, DOC, and DOT, should reflect the joint effort of these agencies by giving due credit to the participation of other agencies. Copies of these releases should be forwarded to:

> Commander, Naval Oceanography Command NSTL Station

Bay St. Louis, MS 39529

Headquarters Military Airlift Command (MAC/OIP) Scott Air Force Base, IL 62225

Headquarters Air Force Reserve Robins Air Force Base, GA 31093

NOAA, Office of Public Affairs 6010 Executive Boulevard Rockville, MD 20852

Deputy Director for Operations (Environmental Services) The Joint Chiefs of Staff Washington, DC 20301



CHAPTER 10 APPENDIX A

ABBREVIATIONS AS USED IN THIS PLAN

ACP	Allied Communications Publication
ADCOM	Aerospace Defense Command
AFB	Air Force Base
AFGWC	Air Force Global Weather Central
AFTN	Aeronautical Fixed Telecommunications Network
AJTWC	Alternate Joint Typhoon Warning Center
APT	Automatic Picture Transmission
ASDL	Aircraft Satellite Data Link
ATTO	Ato Marchella Clauburg

ATC	Air Traffic Control
AWN	Automated Weather Network
AWS	Air Weather Service
CARCAH	Chief, Aerial Reconnaissance Coordination,
	All Hurricanes
COMEDS	Continental U.S. Meteorological Data System
CONF	Confidence Factor
CPHC	Central Pacific Hurricane Center
CW	Continuous Wave
DCS	Data Collection System
DMSP	Defense Meteorological Satellite Program
DOC	Department of Commerce
DOD	Department of Defense
DOT	Department of Transportation
EDB	Environmental Data Buoy
ELT	Eastern Local Time
EPHC	Eastern Pacific Hurricane Center
ERL	Environmental Research Laboratories
ETA	Estimated Time of Arrival
ETD	Estimated Time of Departure
FAA	Federal Aviation Administration
FMH	Federal Meteorological Handbook
FOFAX	Forecast Office Facsimile
GOES	Geostationary Operational Environmental Satellite
GMT	Greenwich Mean Time
HF	High Frequency
HWO	Hurricane Warning Office
ICAO	International Civil Aviation Organization
IR	Infrared
ITOS	Improved TIROS Operational Satellite
JTWC	Joint Typhoon Warning Center
LF	Light Fine (Visual Scanning Radiometer 0.3 n mi)
LS	Light Smooth (Visual Scanning Radiometer 1.5 n mi)
MAC	Military Airlift Command
MIC	Meteorologist in Charge
MSD	Meteorological Services Division

NAMNavy Communications Area Master Station AtlanticNASANational Aeronautics and Space Administration#NAVEASTOCEANCENNaval Eastern Oceanography Center#NAVWESTOCEANCENNaval Western Oceanography Center

CHAPTER 10 APPENDIX A (Continued)

NDBO	National Data Buoy Office
NESS	National Environmental Satellite Service
NHC	National Hurricane Center
NHOP	National Hurricane Operations Plan
NLT	Not Later Than
NMC	National Meteorological Center
NOAA	National Oceanic and Atmospheric Administration
NPSU	National Public Service Unit
NRCC	North American Air Defense Command Regional Control Center
NWS	National Weather Service
OL-G	Operating Location G
PM	Preventive Maintenance
RAWARC	Radar Report and Warning Coordination
RECCO	Reconnaissance Code
RFC	Research Facilities Center
SAB	Satellite Analysis Branch
SFSS	Satellite Field Services Station
SMS	Synchronous Meteorological Satellite
SR	Scanning Radiometer
SSH	Saffir/Simpson Hurricane
SST	Sea Surface Temperature
TCPOD	Tropical Cyclone Plan of the Day
TD	Tropical Depression
TF	Thermal Fine (Infrared Scanning Radiometer
	0.3 n mi)
TS	Thermal Smooth (Infrared Scanning Radiometer
	1.5 n mi)
UHF	Ultra High Frequency
US	United States
USAF	United States Air Force
USCG	United States Coast Guard
USN	United States Navy
VHRR	Very High Resolution Radiometer
VIS	Visible
VISSR	Visible - Infrared Spin Scan Radiometer
VTPR	Vertical Temperature Profile Radiometer
WMO	World Meteorological Organization
WRG	Weather Reconnaissance Group
WRS	Weather Reconnaissance Squadron
WSFO	Weather Service Forecast Office
WSO	Weather Service Office
WSOM	Weather Service Operations Manual
WSR	Weather Surveillance Radar
Z	Zulu (Coordinated Universal Time)

